
**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

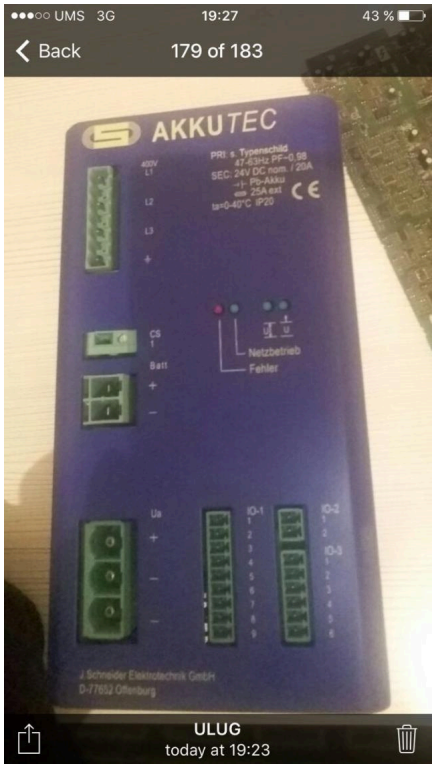


# Akkutec

Garanti: 12 ay

Bu ürüne ait Türkiye içi kapı teslim fiyat ve teslim süresi içeren teklifimizi almak için **info@yursat.com.tr** e-posta adresine ya da www.yursat.com.tr/iletisim adresindeki iletişim formu üzerinden bizlere ulaşabilirsiniz.

**Akkutec** Markası, tedarik süresi için lütfen bizimle iletişime geçiniz.

*Firmamız Akkutec Türkiye Distribütörü veya temsilcisi değildir. Firmamız sipariş durumunda, belirtilen ürünlerde sadece Orjinal ve yeni ürün teklifi sunmaktadır. Bu sitede gösterilen Özel marka adları ve ticari markalar ilgili sahiplerinin mülkiyetindedir, talep durumunda kaldırılmaktadır.*

| Ürün | Açıklama |
|---|---|
| AKKUTEC 2440-0 | NBPAP33G1M01 |
| AKKUTEC 2403-0 | AKKUTEC 2403-0<br>Nominal input voltage<br>230 V AC + 15% -10%<br>Nominal frequency<br>47 ... 63, Hz<br>Max. Rated input current<br>0.84 A @ 115 V / 0.42 A @ 230 V<br>Max. Charging current<br>0.25 A<br>Nominal output voltage<br>24 V DC<br>Output voltage range (with temperature tracking)<br>19.8 V DC ... 27.8 V DC<br>Output voltage range (without temperature tracking)<br>19.8 V DC ... 26.8 V DC<br>Max. Rated output current<br>2.85 A DC<br>End-of-charge voltage with temperature sensor at 25 °<br>27.1 V DC ± 0.4%<br>End-of-charge voltage without temperature sensor<br>26.8 V DC ± 0.4%<br>Efficiency<br>87%<br>Battery type |

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | Pb battery, maintenance-free<br>Maintenance-free Pb battery (option with modified characteristic curve)<br>Buffer time<br>Depending on the battery and load<br>Protection class<br>IP 20<br><br>Relative humidity<br>Max. 95% non-condensing<br>Max. Installation altitude (without power reduction)<br>2000 m above sea level NN<br>Dimensions (H x W x D)<br>92.5mm x 60mm x 116mm<br>Weight<br>0.55 kg<br>Standards and regulations<br>EN 50178 / EN 60950 |
| AKKUTEC 2420-0 | DC UPS system 400 V AC to 24V DC / 20A<br>The battery-buffered DC power supply of the AKKUTEC series works according to the stand-by parallel principle and, in conjunction with a lead-acid battery, ensures that the DC voltage supply is maintained in the event of a power failure.<br><br>The DC UPS is characterized by the following properties:<br><br>primary switched-mode power supply with I/U charging characteristic<br>active power factor correction (PFC)<br>Microcontroller based battery management<br>Temperature tracking of the charging voltage by external sensor module (option)<br>Display and control panel for control cabinet door installation or surface-mounting (option)<br><br>Designation AKKUTEC 2420-0<br>Rated input voltage 3 x 400 - 500 V AC -15% +10%<br>Rated frequency 50/60 Hz<br>Max input current rating 1.4A AC<br>Rated output voltage 24 V DC<br>Output voltage range (with temperature tracking) 19.8 V DC ... 27.8 V DC<br>Output voltage range (without temperature tracking) 19.8 V DC ... 26.8 V DC<br>Control inputs referenced to +24VDC<br>Shut down<br>boost charge<br>Max. rated output current 20 A DC<br>End-of-charge voltage with temp. sensor at 25° 27.8 V DC ± 0.4%<br>End-of-charge voltage without temp. sensor 26.8 V DC ± 0.4% |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | Max. charging current 2 A at 100% load<br>Charging current at 0% load 21 A<br>Battery type Pb rechargeable battery, maintenance-free<br>Buffer time Depending on the battery<br>Degree of protection IP 20<br>Operating temperature 0 ... 40 °C<br>Storage temperature 0 ... 50°C<br>Max. installation altitude (without derating)<br><br>Dimensions (H x W x D) 101 x 241 x 244 mm<br>Weight approx. 2.4 kg<br>Standards and regulations EN 50178 / EN60950 |
| MTIAL33G5M01 (optional) | Charge temperature sensor |
| PMDV1710G01001 (optional) | Gateway for network connection |
| AKKUTEC 2440-0 | DC UPS system 24V / 40A<br><br>-Primary switching power supply with I/U charging characteristic<br>-active power factor correction (PFC)<br>-Microcontroller-based battery management<br>-Temperature tracking of the charging voltage via external sensor module (option)<br>-Display and control panel for control cabinet door installation or surface (option) |
| AKKUTEC 2403-0 | Rated input voltage<br>230V AC +15% -10%<br>Rated frequency<br>47...63, Hz<br>Max. rated input current<br>0.84A @ 115V / 0.42A @ 230V<br>Max. charging current<br>0.25A<br>Rated output voltage<br>24VDC<br>Output voltage range (with temperature tracking)<br>19.8VDC...27.8VDC<br>Output voltage range (without temperature tracking)<br>19.8VDC...26.8VDC<br>Max. rated output current<br>2.85A DC<br>Final charging voltage with temp. sensor at 25°<br>27.1VDC ±0.4%<br>Final charging voltage without temp. sensor<br>26.8VDC ±0.4%<br>Efficiency<br>87%<br>Battery type<br>Pb battery, maintenance free |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | Pb battery maintenance-free (option with changed characteristic curve)<br>Buffer time<br>Depending on battery and load<br>Protection class<br>IP20<br>Relative humidity<br>Max. 95% non-condensing<br>Max. installation height (without power reduction)<br>2000 m above sea level NN<br>Dimensions (H x W x D)<br>92.5mm x 60mm x 116mm<br>Weight<br>0.55kg<br>Standards and regulations<br>EN 50178 / EN 60950 |
| Akkutec 2410-0 | |
| Nbpaq33g1m10 | |
| 47-63hz | |
| Akkutec 2420-0 | |
| 2410-0 | |
| 2420-0-P1112 | |
| Akkutec2405 (Nbpa0616g01101) | |
| 2420 | |
| Nbpa0347g01001 | |
| 2410-0 Uninterruptible Power Supply | |
| 2420 ? 3p (Nbpa0313g01002) | |
| Dc-Ups Nbpa0347g01001 | |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*