


Atek

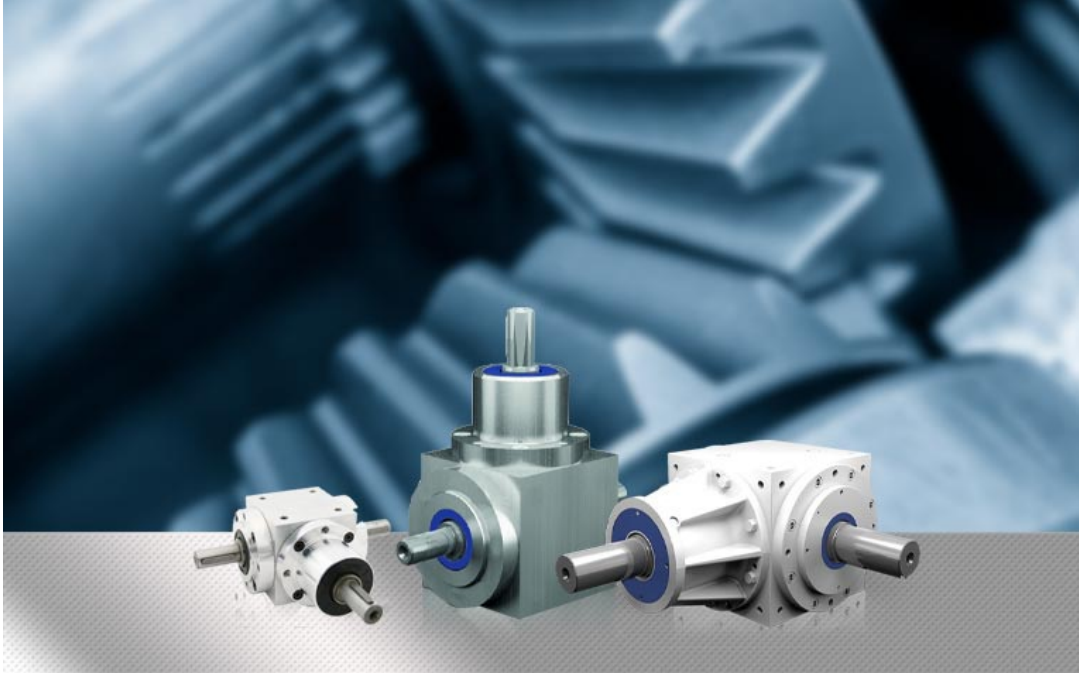

Garanti: 12 ay
Bu rne ait Trkiye ii kapı teslim fiyat ve teslim sresi ieren teklifimizi almak iin info@yursat.com.tr e-posta adresine baŐvuru yapabilir ya da ayrıntılı bilgi iin +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaŐabilirsiniz. **Atek** Markası, tedarik sresi iin ltfen bizimle iletiŐime geiniz.

Firmamız Atek Trkiye Distribtr veya temsilcisi deĐildir. Firmamız sipariŐ durumunda, belirtilen rnlerde sadece Orjinal ve yeni rn teklifi sunmaktadır. Bu sitede gsterilen zel marka adları ve ticari markalar ilgili sahiplerinin mlkiyetindedir, talep durumunda kaldırılmaktadır.

rn	Aıklama
301023	Worm gear SC 063 15: 1 B0 -1 + 5 + 6.3- 300 / S1 / 1500 / KN / SOND V 120 / 19x40 - flange No. 601 - low backlash design, <6 arcmin (S1) - with backlash-free coupling ROTEX GS type clamping hub (KN) - suitable for mounting your motor with: Flange: ZK = ø95, 4xø9 on LK = ø130 Shaft: ø19x40 without key - Special version (1500): Actual translation: 30/2 - mathematically accurate Shaft end side 5: ø24k6x46, with keyway (Dimension f1 = 136mm, standard = 118) ***Replacement for 300282***
V 090 1:1 E0N0 -9.9- 1500/SH/B0/ST/S1	206055 Bevel gears (E0N0) - hollow shaft (B0) - lubrication without venting, viscosity 220 (ST) - dust-proof version (SH) - hollow shaft, bore ø20H7 with keyway according to DIN 6885 (S1) - low backlash design, <6 arcmin. *** As supplied with SN 06110136 ***
PTL110	
AST10	
BCT 22	
202749	bevel gear V 160 2:1 A0 -9.6- 750/B1-E1/ST (B1-E1) - Lubrication with ventilation, on side 1, Viscosity 220 (ST) - Dustproof version Colour: primed white. ***** as supplied with our serial no.354628 ***** - Bevel gear - Unit weight: 29 kg, net /piece [gross: 34 kg] - Goods tariff no.: 8483 4023 - Origin of goods: European Community (Germany) *****

LINEER 4-20mA LTP 750A ATEK	
120467	F900.160 drive shaft
121743	bevel gear set KR 160 2:1 WR (GL 16/32) consisting of: - 1x pinion shaft: F890.160-2:1 (GL 16/32), - 1x bevel gear: F895.156-2:1 (GL 16/32)
170196 30208	,ATEK,Picture Pos No: 2
170196 30208	,ATEK,Picture Pos No: 4
EPD11-DDBRR-S35	
V 160 2:1 A0 -9.6- 750/B1-E1/ST	202749 bevel gear (B1-E1) - Lubrication with ventilation, on side 1, Viscosity 220 (ST) - Dustproof version *** As supplied with SN 354628. ***
200011	Bevel gears V 090 1:1 E0N0 -9.9- 700/A0 (V) - bevel gear (090) - housing edge length [mm] (1:1) - translation (E0N0) - Gearbox design - Single-sided shaft on side 3 - Continuous hollow shaft with keyway on the side 5+6 - Page 5: opposite direction of rotation to page 3 - Page 6: same direction of rotation as page 3 (9.) - Fastening thread - in the flanges (page 3, 5, 6) - in the housing (page 1, 2, 4) - Fastening possible on all sides (.9) - Installation position on all sides (700) - Speed of all shafts [1/min] (A0) - Lubrication without ventilation, viscosity 460 Color: primed matt white
BCT-22-25B-A-Y1/4-S-S30	
120467	drive shaft F900.160
121743	Bevel gear set KR 160 2:1 WR (GL 16/32) consisting of: - 1x pinion shaft: F890.160-2:1 (GL 16/32) - 1x bevel gear: F895.156-2:1 (GL 16/32)
170196	Tapered roller bearings 30208
202749	Bevel gears V 160 2:1 A0 -9.6- 750/B1-E1/ST (V) - bevel gear (160) - housing edge length [mm] (2:1) - Translation (A0) - Gearbox design - Single-sided shaft on sides 3 + 5 - Page 5: opposite direction of rotation to page 3 (9.) - Fastening thread - in the flanges (page 3, 5, 6) - in the housing (page 1, 2, 4) - Fastening possible on all sides (.6) - Installation position page 6 (750) - speed of slow-running shaft [1/min] (B1-E1) - lubrication with ventilation on side 1, Viscosity 220 (ST) - dust-protected version Color: primed matt white ***As supplied with SN 354628. ***
V 160 2:1 A0-9.6-750	seri 354628
202749	Bevel gear unit V 160 2:1 A0 -9.6- 750/B1-E1/ST (V) - Bevel gear unit (160) - Housing edge length [mm] (2:1) - Gear ratio (A0) - Gear unit type - Shaft mounted on one side on sides 3 + 5 - Side 5: opposite direction of rotation to side 3 (9.) - Fastening thread - in the flanges (sides 3, 5, 6) - in the housing (sides 1, 2, 4) - Fastening possible on all sides (.6) - Installation position side 6 (750) - Speed of slow-running shaft [1/min] (B1-E1) - Lubrication with ventilation on side 1, Viscosity 220 (ST) - Dust-proof design Color: matt white primed ***** As supplied with SN 354628*****
LFM 050 A 2M ATEK resistive linear transducer	
ULT30-075 M 1000 A4	3m
ARC S 050 1024 HPL 6 3M Y8 C	
120467 F900.160	drive shaft

PTL110-1B-30 MT 4-20 MA	
PTL110-300MBAR-A-5M	
LFM 050 A 2M	
ARC S050 0100 HPL Rotary Encoder	
200613	
201267	
Vc 090 1.5	
L04511eo	GEAR BOX
200794	
200188	GEAR BOX
Vc200-6:1-D0-337055	
Ars S 50 1000 Hpl 3 S16 A 8 C	Rotary Encoder 500 Pars Please look at the attachement
209280	
Ta757	WELD CONTROL
Ta546	WELD CONTROL
S063-53/1-CI0	GEARBOX 53:1RATIO