


Bellin

Garanti: 12 ay
Bu rne ait Trkiye ii kapı teslim fiyat ve teslim sresi ieren teklifimizi almak iin info@yursat.com.tr e-posta adresine baŐvuru yapabilir ya da ayrıntılı bilgi iin +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaŐabilirsiniz. **Bellin** Markası, tedarik sresi iin ltfen bizimle iletiŐime geiniz.

Firmamız Bellin Trkiye Distribtr veya temsilcisi deĐildir. Firmamız sipariŐ durumunda, belirtilen rnlerde sadece Orjinal ve yeni rn teklifi sunmaktadır. Bu sitede gsterilen zel marka adları ve ticari markalar ilgili sahiplerinin mlkiyetindedir, talep durumunda kaldırılmaktadır.

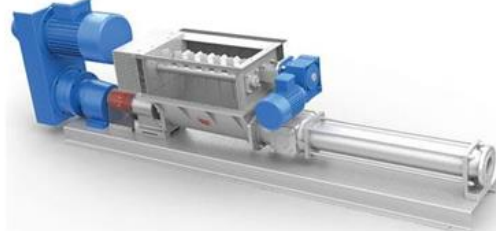

rn	Aıklama
SPARE PARTS FOR PUMP EG 210C/KS S/N 48184	Stator size 210C Perbunan rubber
SPARE PARTS FOR PUMP EG 210C/KS S/N 41184.	Stator o-ring
EZX 210C/KS	Eccentric screw pump Bellin type EZX 210C/KS Stator in black NBRL rubber - Single mechanical seal - Bare shaft with flanged lantern support - Without electric motor****
0297	Stator size 210C Perbunan rubber
710K0503/T	SPARE PARTS FOR YOUR PUMP TYPE LG 500M/KWT S/N 48138 Stator size 500M in NBR rubber suitable for PT 100 temperature probe
710P0608/T	SPARE PARTS FOR YOUR PUMP TYPE LG 600M2/PWT S/N 48128 Stator size 600M2 Perbunan rubber suitable for temperature probe PT 100
710N0506/T	SPARE PARTS FOR YOUR PUMP TYPE LOX 500AL/NW6T S/N 48123 Stator size 500AL Perbunan rubber suitable for PT 100 temperature probe
Progressive Cavity Pumps type EZX 210C/KS	Pump serial number 36708 - year 2008 Fluid: polymer Technical pump data: Pump housing: cast iron GJL - EN 1561 Outlet: cast iron GJL - EN 1561 Rotor: stainless steel 1.4404 AISI 316L Rotating parts: stainless steel 1.4404 AISI 316L Stator: NBR/Perbunan Shaft sealing: mechanical seal steel/graphite Inlet/outlet: internally threaded connections 1" GAS UNI ISO 228/1 Paint: standard NITRE RAL 7012 Performance Data: Speed (rpm): 135 - 350 Capacity (water at 20° C): 385 - 1000 l/h (± 5%) Frequency (Hz): 30 - 79 Outlet pressure (bar): 2 Suction head: flooded (positive suction) Sens of rotation: to the left, seen on drive

	shaft Assembly/Mounting position: Horizontal on support feet Coupling details: Close-coupled design Drive unit: Gear-box driven by frequency converter (not included in the supply) do not run < 30Hz (el. motor is not servocoole) - suggested to start at 40-50Hz in order to get the max. starting torque; we recommend to use only VFD at constant torque Electric motor data: 0,75 kW - 4P - PTC - 400V - 3 ph - 50 HZ - IP 55 - CI. F. (please confirm us the voltage in case of order) - IE3
0220	Mechanical seal steel/graphite D.35
34030202	Rotor size 200C in carbon steel hard chromed
Transmission shaft complete with joints	Composed of: 3303020 Transmission shaft without joints NR 1 3532032 Pin in stainless steel AISI 316 NR 2 9619034 Bush NR 8 3505036 Seal cover ring NR 4 3522033 Cross in .S.S aisi 316 NR 2 031 Ring seeger for pin NR 8 035 Seeger ring for sleeve rubber NR 4 725K037 Rubber sleeve in NBR NR 2
Stator size 100 EPDM rubber	SPARE PARTS FOR YOUR PUMP TYPE EO 100/ES
EZX 210C/KS	Eccentric screw pump Bellin type EZX 210C/KS Stator in black NBRL rubber - Single mechanical seal - Bare shaft with flanged lantern support - Without electric motor Pump as serial number 51656 Please note the pump is without speed gear and Electric Motor as originally supplied Technical Pump Data Pump housing: cast iron GG 25 Outlet: cast iron GG 25 rotor: Stainless steel AISI 316 rotating parts: Stainless steel AISI 316 Stator: nitrile/NBR/Perbunan rubber Painting: pump can be supplied only with primer or with our standard color Nitro RAL 7012. in case of order please indicate your choice. Shaft sealing: single mechanical seal - steel/graphite material Inlet/outlet: threaded connections GAS 1" Sens of rotation: to the left, seen on drive shaft Assembly/Mounting position: Horizontal on support feet Coupling details: Direct coupling/en-block execution
Stator size 100 Viton rubber	SPARE PARTS FOR YOUR PUMP TYPE EO 100/VS 710V0100
600M2 PT100	Perbunan Rubber Stator
500 M /KWT PT100	NBR Rubber Stator
500 AI PT100	Perbunan Rubber Stator
SPARE PARTS FOR YOUR PUMP TYPE EG	210C/KS S/N 41184 Mechanical seal steel/graphite D.35
SPARE PARTS FOR YOUR PUMP TYPE EO	100/VS Stator size 100 Viton rubber
EZX EG 210C/KS	
710J1203	Stator size 1200M HNBR rubber
240301P0889/1	Cross cardanic transmission shaft in NBR in carbon steel
NG 1200L/ERC 2L B	ROTOR PUMP 32-021
COMP. CARDAN SHAFT JOINT	
NG 1200L/ERC 2L	STATOR PUMP 32-021
EG 210C/KS	MONOPOMPA 1.1 kW electric motor pump
400al	
800l	
4000m	
Albero Di Comando	
Eg 300c/P	
0611	

0225
0106
400c
5000m
0819/M
150c
1200I2
600I
0205
1200m
0324
200m
0889 Fixed Speed Transmission Shaft For Ng 1000 M/Pr
0323
0426
0621
0322
(44054 - 44055) Spare Parts For Pump Type Lo 300c/P2 Stator Size 300c Perbunan Rubber
300c
0305
1002 Stator For Ng 1000 M/Pr
2/M
Eg300c/P
202
0351
0559
0204
020
0153/M
962mt45agsa
Kit Per Ng800
300m
Statore Gomma Epdm
Esgaf1aj2112I

2000m
1200l
Lz 550c/Erf
210c
26237
34010050
3000l2
0302
0429/B Stator Size 400b Perbunan Rubber
C 40 Cromato
3000l
Ricambi Pompa Lrx 450 C/Ps
500al
3000m
0154/M
21
400l
Eg300 C/P
Ricambi Pompa Eg 200 C/Prs
0611 Drive Shaft For Ng 1000 M/Pr
0445
5500l
Albero Trasmission
800m
550c
Albero Di Trasmis
0112
Anello
Anello Or Statore
34020452
94170426
0325
300l
0151
0220
150m

Rotore C40
500l
600c2
Lz 400c/Erf
0602/C
Lg400c/Prs(Ex.Ec400c/Pr)
Vbaba24fafba U4g
500m
Lz 600c2/Erf
0309
710e0402
570l
0314
600m2
0208
240301p0889
0429/B
19/M
0354/L
3500m
020/Transmisyon Shaft
710e0552
200c
0802/M
Statore In Gomma
6000m
1001 Rotor For Ng 1000 M/Pr
500a12
0353/L
450c
600m
33630465