


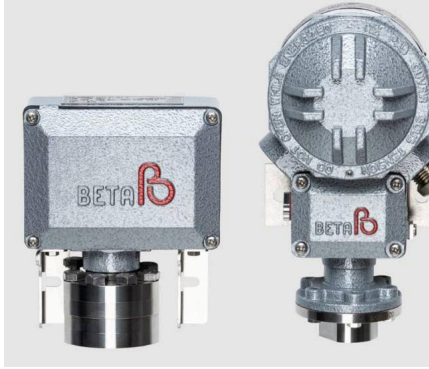

Beta

Garanti: 12 ay

Bu ürüne ait Türkiye içi kapı teslim fiyat ve teslim süresi içeren teklifimizi almak için info@yursat.com.tr e-posta adresine başvuru yapabilir ya da ayrıntılı bilgi için +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaşabilirsiniz.

Beta Markası, tedarik süresi için lütfen bizimle iletişime geçiniz.

Firmamız Beta Türkiye Distribütörü veya temsilcisi değildir. Firmamız sipariş durumunda, belirtilen ürünlerde sadece Orjinal ve yeni ürün teklifi sunmaktadır. Bu sitede gösterilen Özel marka adları ve ticari markalar ilgili sahiplerinin mülkiyetindedir, talep durumunda kaldırılmaktadır.

Ürün	Açıklama
Md 120	magnetic field detector Operating distance 120mm, with LED display for pig detection, without switching output Tariff No .: 85365019, URL: DE
C2-D408M-S2B-B1-U1-V	BETA - differential pressure switch Housing: aluminium, IP66, electrical connection M 20 x 1.5 Adjustment range: 1.0 - 14.5 bar Max. working pressure: 140 bar Connection: R 1/2" female, 316 SS Diaphragm/O-ring: Buna-N/Buna-N Microswitch: VAC 480/15 VDC 125/0.5 for direct current with silver contacts "V=Protective varnish against fungal attack (inside)" By request: Switching point bar falling/rising set at the factory and documented on a paper tag on the switch
C1-V406M-S1B-B1-K1-C	BETA - vacuum monitor Housing: aluminium, IP66, electrical connection PG 13.5 Setting range: -980 / 1000 mbar Max. operating pressure: -1 bar / +125 bar Connection: R 1/4" female, 316 SS Diaphragm/O-ring: Buna-N/Buna-N Microswitch: VAC 480/15 VDC 28/0.5 standard for alternating current C=cable gland By request: Set to 500 mbar rising
C1-V406M-S1B-B1-K1-C	
Setting certificate for BETA pressure switch	(if desired)
Material certificate (if desired)	according to EN 1024-2005-01-3.1

Ürün	Açıklama
C1-P808H-S1B-B1-SP	Housing: aluminium, IP66, electrical connection PG 13.5 Setting range: 4.0 - 170 bar Max. working pressure: 200 bar Connection: G 1/4" female, 316 SS Diaphragm/O-ring: Buna-N/Buna-N Microswitch: VAC 250/15 with adjustable switching differential By request: Switching point bar falling/rising set at the factory and documented on a paper tag on the switch
BETA - pressure switch	C1-P506H-S7N-P4-L1 Housing: aluminium, IP66, electrical connection PG 13.5 Setting range: 0.5 - 9.0 bar Max. working pressure: 200 bar Connection: NPT 1/2" male, 316 SS Diaphragm/O-ring: PTFE/PTFE Microswitch: VAC 480/10 VDC 28/0.5 standard for alternating current By request: Switching point bar falling/rising set at the factory and documented on a paper tag on the switch
C2-D406M-S2B-B1-U1	BETA - differential pressure switch Housing: aluminium, IP66, electrical connection M 20 x 1.5 Adjustment range: 1.0 - 6.0 bar Max. working pressure: 140 bar Connection: G 1/2" female, 316 SS Diaphragm/O-ring: Buna-N/Buna-N Microswitch: VAC 480/15 VDC 125/0.5 for direct current with silver contacts By request: Switching point bar falling/rising factory-set and above Documented paper tag on switch
C1-P808H-S1B-B1-SP	Housing: aluminum, IP66, electrical connection PG 13.5 Setting range: 4.0 - 170 bar Max. operating pressure: 200 bar Connection: G 1/4" inside, 316 SS Membrane/O-ring: Buna-N/Buna-N Micro switch: VAC 250/15 with adjustable switching difference
C3-P808H-S1B-S2-K1	Housing: aluminum, IP66, electrical connection 3/4" NPT-F Setting range: 4.0 - 170 bar Max. operating pressure: 200 bar Connection: G 1/4" inside, 316 SS Membrane/O-ring: stainless steel/Viton-A Micro switch: VAC 480/15 VDC 28/0.5

Ürün	Açıklama
	Standard for alternating current By request: Switching point bar falling/rising set at the factory and documented via a paper tag on the switch
Setting certificate (if desired)	for BETA pressure switches
Material certificate (if desired)	according to EN 1024-2005-01-3.1
LS8500-406	
C1-P504H-S7N-V2-U1	Housing: aluminum, IP66, electrical connection PG 13.5 Adjustment range: 0.4 - 3.5 bar Max. operating pressure: 200 bar Connection: NPT 1/2" male, 316 SS Membrane/O-ring: Viton-A/Viton-A Microswitch: VAC 480/15 VDC 125/0.5 for direct current with silver contacts
C1-P506H-S7N-P4-L1	Housing: aluminum, IP66, electrical connection PG 13.5 Adjustment range: 0.5 - 9.0 bar Max. operating pressure: 200 bar Connection: NPT 1/2" male, 316 SS Membrane/O-ring: PTFE/PTFE Microswitch: VAC 480/10 VDC 28/0.5 standard for alternating current
C1-P506H-C1N-B1-K1-X1	
C1-P908H -C1N-B1-K1-X1	
006800035	Torque verification device
1036 175	
1924b	
1928dal	
1760pa/Ac	
C24s/8 - 2400s8	
Ga1530-7062-3/D	GAUGE HEAD 24VDC 11W 5BAR
009510550	
1942s	
1715 FI B	

Ürün	Açıklama
1497rc	
C4-P306I-S2b-S1-U1	
00004460060	
1229 Lph A6	
1931cd13	
96t-4	
00019310013	
C24s/5 - 2400s5	
1032 140x13	
1760paac-Dc	
00004300004	
C24sa/6 - 2400sa6	
Bc-Fsc-050-009	I/O MODULE BOARD
009200426	
007280424	
C24sa/7 - 2400sa7	
009510540	
1038 175	
00015000325	
00004300005	
1691 Bg 5	
1760pa/Ac-Dc	
1472au	
024002904	
006060105	
860mix/A31	

Ürün	Açıklama
4200-V3-D356h-Sin-M2-Ki-V-Y-Xi	
1760/Ohm	
4000-306	MEASURE DEVICE
C24sa-O/7	
1942 A	
1150 Bm160	
C4-P506h-S2b-B1-U1	
4200-V3-P504h-S7n-M2-Ki-V-Y	
C39/7 - 3900	
00004300011	
142/B9	
928/25	
030100006	
1930hla	
00004300007	
14n6,5tisps6k	
00004300010	
Ga1530-7062-2/C	GAUGE HEAD MLD 11W
96-10	
024001903/ Ssc-0003	
1931cd6	
M90a-Bm12ci-Ps6k-S	
1942a	
015990302 M150 150mm.	
C1-P506h-S2n-S0-G1-I.	
C33/8	

Ürün	Açıklama
024002955	
V3-T54811-D00-S0-K1-V-Y	
012280045 Yıldız Tornavida	
2032 Et/A	
1942lr	
1370 300	
V 1290 3 5x100	
003830002 383/2 220mm	
1930ncd	
96-6	
1032 180	
00004300016	
C1-V404m-S1n-S6-K1	
Ln3015s	DETECTOR
1692 3	
C24sa/8 - 2400sa8	
1930la	
M120a-Bm12ci-Ps6k-S	
001420069	
024001951/ Ssc-0051	
1946a	
C1-V304l-S2b-B1-K1v	
1084 160	
1946	
1932rs13	
1927p	

Ürün	Açıklama
4200-V3-P708h-S7n-M2-Ki-V-Y-Xi	
00001950019	
00005600020	
00004300008	
1038 135x13	
024001956/ Ssc-0056	
1928da	
015180002	
00009280862	
C39/6 - 3900	
1927a	
1946kf	
1932b13	
011050252	
015511	
280-300	
C1-P508h-S2n-B1-K1	
C33/6	
1719bm A P	
12br-R8rtsi-Ps6k	
1928cd	
012010003	
00004300002	
96-8	
C28-2800 Orange	
1932b10	

Ürün	Açıklama
1719bm A R	
024001903 Ssc 0003	
M3v-Pr3c-Ps6k-S	
1931cd10	
009200425	
1946c4.8	
C24s/7 - 2400s7	
1390 R35	
C24s/6 - 2400s6	
009510560	
1290 2 5x50	
00004300003	
024001951 Ssc 0051	
C39/8 - 3900	
1048 250	
00019360024	
96t-2,5	
928/55	
910235010	CALIBRATOR
1760b	
009600110	
C24s/7-O	
C57s/A-O	
1946c7.8	
009200432	
P502hc7nb1slx1	

Ürün	Açıklama
1931an10	
96t-3	
1034 130x13	
12b-R8tsi-Ps6k	
003360001 336	
C4-P304I-S2b-S1-U1	
00019460001	
1760/Rms	
1034 170	
1936/4a	
1927cd	
325	CALIBRATOR MULTIFUNCTION
C33/7	
96t-5	