
Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

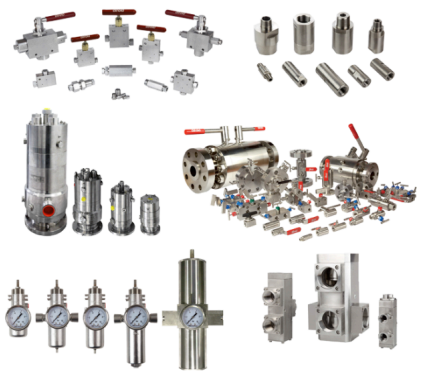

Bifold

Garanti: 12 ay

Bu ürüne ait Türkiye içi kapı teslim fiyat ve teslim süresi içeren teklifimizi almak için **info@yursat.com.tr** e-posta adresine ya da www.yursat.com.tr/iletisim adresindeki iletişim formu üzerinden bizlere ulaşabilirsiniz.

Bifold Markası, tedarik süresi için lütfen bizimle iletişime geçiniz.

Firmamız Bifold Türkiye Distribütörü veya temsilcisi değildir. Firmamız sipariş durumunda, belirtilen ürünlerde sadece Orjinal ve yeni ürün teklifi sunmaktadır. Bu sitede gösterilen Özel marka adları ve ticari markalar ilgili sahiplerinin mülkiyetindedir, talep durumunda kaldırılmaktadır.

Ürün	Açıklama
[4282] 1/8" Npt - Mv - Bifold - Fp03p	
SPR-08-08-P1-52-XX-00-AL	[4489] 1/2 "NPT Pneumtic Valve - SPR-08-08 Fabr .: Bifold Fluidpower Type: SPR-08-08-P1-52-XX-00-AL Material: SS316L Operating temperature range: -60 ° C to + 100 ° C Cv: 3.9 SPR-08 Model Code, pneumatic valve 08 1/2 "NPT connection P1 pilot connection (actuator) 52 5 ways, 2 positions XX configuration 00 spring return AL seals Fluorosilicone Weight: approx. 2.6 kg Customs tariff number: 8481 20 90 UK
FP06P-S1-04	[6483] 1/4" NPT MV - Bifold - FP06P-S1-04 3/2-way solenoid valve Fabr .: Bifold Fluidpower Type: FP06P-S1-04-32-NU-V-27A-24D-ML-30 Operating pressure: 1-10 bar Operating temperature range: -20 ° C to + 40 ° C (@ T6) C.v .: 1 FP06P Standard Service (direct acting) S1 Actuator solenoid 04 1/4 "NPT, connection - stainless steel body 32 3 ways, 2 positions NU Normally Universal (1-> 2 = NC / 3 -> 2 = NO) V Viton seals 27A Degree of protection: ATEX / IECEx, Ex d IIC Gb, Ex tb IIIC Db T4 / 5/6 . aluminum casing 24D power supply 24V DC ML Manual reset - (Electrical and manual req'd . to latch or temporary manual override)

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	30 power consumption 3.0 watts Weight: approx. 1 kg
[3867] 1/4" NPT - Filter / Regler - Bifold - SH06	Make: Bifold Fluidpower Type: SH06-FR-SR-MD-10-X1 Material: SS316L Operating temperature range: -20°C to +135°C CV. 1.0 SH06 standard service, 1/4"NPT connection FR filter / controller SR Self Relieving (Secondary Vent) MD Manual Drain 10 0.4- 10 bar outlet pressure X1 5µm filter element Weight: about 1kg Customs tariff number: 8481 20 9090 Country of origin: United Kingdom
[2647] Abluftdrossel - Bifold - S06	Screw-in throttle valve Make: Bifold Fluidpower Type: S06-PFR Material: SS316L Operating pressure 0- 12 bar(g) Operating temperature range: -60°C to +130°C S Standard Service (pneumatic) 06 1/4" NPT connection (male thread) PFR port flow regulator Weight: approx. 0.04 kg Customs tariff number: 8481 20 90 Country of origin: United Kingdom
[3268] 1/4" NPT - MV - Bifold - FP06P-S1-04	Manufacturer: Bifold Fluidpower Type: FP06P-S1-04-32-NU-V-77A-24D-57-K85 Material: SS316L Operating pressure: 0-10 bar(g) Operating temperature range: -20°C to +40°C (@T6) CV: 0.75 FP06P Standard Service (direct acting) S1 actuator: Solenoid 04 1/4" NPT-F connections 32 3 ways, 2 positions NU Normally Universal (1->2 = NC / 3 ->2 = NO) V Viton seals (-20°C to +90°C) 77A Degree of protection: ATEX/IECEx, Ex d IIC Gb, Ex tb IIIC Db T4/5/6 24D power supply 24V DC 57 Power consumption 5.7 watts K85 cable entry 1/2" NPT Weight: about 2.2kg Customs tariff number: 8481 20 9090 Country of origin: United Kingdom

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
[1858] 1/4" NPT Quick Exhaust Valve - Bifold - S06	Make: Bifold Fluidpower Type: S06-QEV Material: SS316L Operating pressure: 0 - 12 bar Operating temperature range: -20°C to +180°C S standard service 06 1/4" NPT connection QEV quick exhaust valve Weight: about 0.35 kg
[139] 1/4" NPT - One-way flow control valve	Bifold - S06 throttle check valve Manufacturer: Bifold Fluidpower Type: S06-FC1 Material: SS316L Pressure range: 0 - 12 bar Operating temperature range: -20°C to +180°C S standard service 06 1/4" NPT connection FC1 Flow Control (Uni Directional) Weight: about 0.4kg
[3445] 1/4" NPT - MV - Bifold - FP06P-S1-04	Manufacturer: Bifold Fluidpower Type: FP06P-S1-04-32-NU-V-77A-24D-35 Material: SS316L Operating pressure: 0-10 bar(g) Operating temperature range: -20°C to +40°C (@T6) CV: 0.6 FP06P series (direct acting) S1 actuator: Solenoid 04 1/4" NPT-F connections 32 3 ways, 2 positions NU Normally Universal (1->2 = NC / 3 ->2 = NO) V Viton O-rings (-20°C to +90°C) 77A Degree of protection: ATEX/IECEx, Ex d IIC Gb, Ex tb IIIC Db T4/5/6 24D power supply 24V DC 35 power consumption 3.5 watts Weight: about 2.2kg
[1557] Check Valve - Bifold - HCV - 04F	Make: Bifold Fluidpower Type: HCV/04F/04F/06/3/S Material: SS316 Operating temperature range: -30°C to +130°C HCV hydr. check valve 04F 1/4" NPT female thread 04F 1/4" NPT female thread 06 Working pressure max. 414 bar 3 switch dp 3psi S Seal Nitrile (-30°C to +130°C)

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
[13516] Hydraulik Ventil - Bifold - FP02	Make: Bifold Type: FP02/S0A/M/32/NC/S/77A-24D/M/35 Material: SS316L Throughput: 2 lpm Operating temperature range: -30°C to +40°C (@T6) FP02 series SOA max working pressure. 250bar (direct acting) M flange connection 32 3-way, 2-position NC Normally closed S Nitrile seals (-30°C to +130°C) 77A Degree of protection: ATEX/IECEx, Ex d IIC Gb, Ex tb IIIC Db T4/5/6 24D power supply 24V DC M manual override 35 power consumption 3.5 watts Weight: approx. 2.25 kg
XS08-08-ABBC1F4PS2-77G-24D-30-AL-10X3-X8	[13731] 1/2" NPT Manifold - XS08-08 3/2 way manifold control unit Manufacturer: Bifold Fluidpower Type: XS08-08-ABBC1F4PS2-77G-24D-30-AL-10X3-X8 Material: SS316L Operating temperature range: -60°C to +40°C (@T6) XS08-08 Manifold control unit 1/2", 1/2" NPT connection A 2-way ball valve B check valve B check valve C1 1/2" NPT take off F4 filter regulator (manual drain) with pressure gauge P 3/2 way SPR pneumatic valve (with Pilot Line stack capabilities), NC S2 FP03P - 3/2-way solenoid valve with manual override (M) . NC, direct acting 77G Degree of protection: CU-TR/IECEx, Ex d IIC Gb, Ex tb IIIC Db T4/5/6 24D power supply 24V DC 30 power consumption 3.0 watts AL seals Fluorosilicone (-60°C to +90°C) 10X3 outlet pressure range 0.4-10 bar, filter element 20-30µm X8 manometer Ø50mm, 0-10Bar, 1/8" NPT connection, Glycerine Filled Gauge * No exhaust flow control, exhaust breathers Customs tariff number: 8481 20 9090 Country of origin: United Kingdom
XS08-08-AF4PS2-77G-24D-30-AL-10X3-X8	[13732] 1/2" NPT Manifold - XS08-08 3/2 way manifold control unit Manufacturer: Bifold Fluidpower Type: XS08-08-AF4PS2-77G-24D-30-AL-10X3-X8

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	Material: SS316L Operating temperature range: -60°C to +40°C (@T6) XS08-08 Manifold control unit 1/2", 1/2" NPT - connection A 2-way ball valve F4 filter regulator (manual drain) with pressure gauge P 3/2 way SPR pneumatic valve (with Pilot Line stack capabilities), NC S2 FP03P - 3/2 way solenoid valve with manual override (M), . NC, direct acting 77G Degree of protection: CU-TR/IECEx, Ex d IIC Gb, Ex tb IIIC Db T4/5/6 24D power supply 24V DC 30 power consumption 3.0 watts AL seals Fluorosilicone (-60°C to +90°C) 10X3 outlet pressure range 0.4-10 bar, filter element 20-30µm X8 manometer Ø50mm, 0-10Bar, 1/8" NPT connection, Glycerine Filled Gauge * No exhaust flow control, exhaust breathers
XS04-08-AF4S2-77G-24D-30-AL-10X3-X8	[13733] 1/4" NPT Manifold - XS04-08 3/2 way manifold control unit Manufacturer: Bifold Fluidpower Type: XS04-08-AF4S2-77G-24D-30-AL-10X3-X8 Material: SS316L Operating temperature range: -60°C to +40°C (@T6) XS04-08 Manifold control unit 1/4", 1/2" NPT - connection A 2-way ball valve F4 filter regulator (manual drain) with pressure gauge S2 FP06P - 3/2-way solenoid valve with manual override (M), . NC, direct acting, high flow 77G Degree of protection: CU-TR/IECEx, Ex d IIC Gb, Ex tb IIIC Db T4/5/6 24D power supply 24V DC 30 power consumption 3.0 watts AL seals Fluorosilicone (-60°C to +90°C) 10X3 outlet pressure range 0.4-10 bar, filter element 20-30µm X8 manometer Ø50mm, 0-10Bar, 1/8" NPT connection, Glycerine Filled Gauge * No exhaust flow control, exhaust breathers
XS04-04-AF4S12-77G-24D-28LP-AL-10X3-X8	[13734] 1/4" NPT Manifold - XS04-04 3/2 way manifold control unit Manufacturer: Bifold Fluidpower Type: XS04-04-AF4S12-77G-24D-28LP-AL-10X3-X8 Material: SS316L Operating temperature range: -60°C to +40°C (@T6) XS04-04 Manifold control unit 1/4", 1/4" NPT - connection A 2-way ball valve F4 filter regulator (manual drain) with pressure gauge

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	S12 FP06P - 3/2-way solenoid valve with manual override (M), . NC, High Flow, Direct acting 77G Degree of protection: CU-TR/IECEx, Ex d IIC Gb, Ex tb IIIC Db T4/5/6 24D power supply 24V DC AL seals Fluorosilicone (-60°C to +90°C) 10X3 outlet pressure range 0.4-10 bar, filter element 20-30µm X8 manometer Ø50mm, 0-10Bar, 1/8" NPT connection, Glycerine Filled Gauge * No exhaust flow control, exhaust breathers
XS16-12-F4P4S2-77G-24D-30-AL-10X4-X8	[13736] 3/4" NPT Manifold - XS16-12 3/2 way manifold control unit Manufacturer: Bifold Fluidpower Type: XS16-12-F4P4S2-77G-24D-30-AL-10X4-X8 Material: SS316L Operating temperature range: -60°C to +40°C (@T6) XS16-12 manifold control unit 1", 3/4" NPT connection F4 filter regulator (manual drain) with pressure gauge P4 3/2 way SPR pneumatic valve (with Pilot Line stack capabilities), NC S2 FP03P - 3/2-way solenoid valve with manual override (M), NC 77G Degree of protection: CU-TR/IECEx, Ex d IIC Gb, Ex tb IIIC Db T4/5/6 24D power supply 24V DC 30 power consumption 3.0 watts AL seals Fluorosilicone (-60°C to +90°C) 10X4 outlet pressure range 0.4-10 bar, filter element 40- 50µm X8 manometer Ø50mm, 0-10Bar, 1/8" NPT connection, Glycerine Filled Gauge * No exhaust flow control, exhaust breathers
XS04-04-AF4S9-77G-24D-30-AL-10X3-X8	[13735] 1/4" NPT Manifold - XS04-04 3/2 way manifold control unit Manufacturer: Bifold Fluidpower Type: XS04-04-AF4S9-77G-24D-30-AL-10X3-X8 Material: SS316L Operating temperature range: -60°C to +40°C (@T6) XS04-04 Manifold control unit 1/4", 1/4" NPT - connection A 2-way ball valve F4 filter regulator (manual drain) with pressure gauge S9 FP06P - 3/2-way solenoid valve with manual override (M), . NO, direct acting 77G Degree of protection: CU-TR/IECEx, Ex d IIC Gb, Ex tb IIIC Db T4/5/6 24D power supply 24V DC 30 power consumption 3.0 watts AL seals Fluorosilicone (-60°C to +90°C) 10X3 outlet pressure range 0.4-10 bar, filter element 20-30µm

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	X8 manometer Ø50mm, 0-10Bar, 1/8" NPT connection, Glycerine Filled Gauge * No exhaust flow control, exhaust breathers
AS 25-QEV	[3010] 1" NPT Quick Exhaust Valve - Bifold - AS25 Make: Bifold Fluidpower Type: AS 25-QEV Operating pressure 0-12 bar Operating temperature range: -60°C to +60°C CV: 10 AS low temp. service 25 1" NPT connection QEV quick exhaust valve Weight: approx. 1.2 kg
FP06P-S1-04-32-NU-V-77A-24D-57	[1260] 1/4" NPT - MV - Bifold - FP06P-S1-04 Manufacturer: Bifold Fluidpower Type: FP06P-S1-04-32-NU-V-77A-24D-57 Material: SS316L Operating pressure: 0-10 bar(g) Operating temperature range: -20°C to +40°C (@T6) CV: 0.6 FP06P series (direct acting) S1 actuator: Solenoid 04 1/4" NPT-F connections 32 3 ways, 2 positions NU Normally Universal (1->2 = NC / 3 ->2 = NO) V Viton O-rings (-20°C to +90°C) 77A Degree of protection: ATEX/IECEx, Ex d IIC Gb, Ex tb IIIC Db T4/5/6 24D power supply 24V DC 57 power consumption 5.7 watts Weight: about 2.2kg
[11179] 1 1/2" HIPEX - Bifold 24	Type: Hipex-24-11-AL-E Connection: IN & OUT 1-1/2" NPT Pilot 1/4" NPT Material: SS316 Operating temperature range: -60°C to +40°C CV: 35 HIPEX 2-way quick air vent 24 1-1/2" NPT ports 11Ratio 1:1 AL seals in fluorosilicone E 1 x exhaust air connection
solenoid valve coil 109-110DC-57-01	
solenoid Valve Coil	1Ex d IIC Gb IP66/IP67 (CRK-77A-24D-57-7-15-01)

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
solenoid valve	FP06-S1-04-32-NU-AL-27G-11OD-M-57
solenoid Valve Coil	1Ex d IIC Gb IP66/IP67 (CRK-77A-24D-57-7-15-01)
[896] 1/2" NPT - Throttle Valve - Bifold - S12-CPV	Make: Bifold Fluidpower Type: S12-CPV Material: SS316L Operating pressure 1- 12 bar(g) Operating temperature range: -20°C to +180°C S standard service 12 1/2" NPT connection CPV cylinder plug valve (bidirectional)
XW-00-01179	
[5252] 1/4" NPT Filter / Regulator - Bifold - ASH06	Make: Bifold Fluidpower Type: ASH06-FR-SR-AD-10-X1 Material: SS316L Operating temperature range: -60°C to +80°C CV. 1.0 ASH06 Arctic Service, 1/4"NPT connection FR filter / controller SR Self Relieving (pressure relief) AD Auto Drain (automatic condensate drain) . max. 16 bar inlet pressure, temperature reduced to +80°C 10 0.4 - 10 bar outlet pressure range X1 5µm filter element
[14596] 1/2" NPT - Booster -VBP-08	booster Manufacturer: Bifold Fluidpower Type: VBP-08-11-AL-L129 Material: SS316L Temperature range: -60°C to +100°C CV: 3.6 VBP Volume Booster, Piston 08 ½" NPT connection 11Ratio 1:1 AL fluorosilicone seals (arctic service) L129 Shrouded Bypass Needle
[4727] 1/4" NPT - MV - FP06P-S1-04	Manufacturer: Bifold Fluidpower Type: FP06P-S1-04-32-NU-AL-77G-24D-35 Material: SS316L Operating pressure: 0-10 bar(g) Operating temperature range: -60°C to +40°C (@T6) CV: 0.6 FP06P series (direct acting) S1 actuator: Solenoid 04 1/4" NPT-F connections 32 3 ways, 2 positions NU Normally Universal (1->2 = NC / 3 ->2 = NO)

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	AL Fluorosilicone Seals (-60°C to +90°C) 77G Degree of protection: CU-TR/IECEx, Ex d IIC, Ex tb IIIC Db T4/5/6 24D power supply 24V DC 35 power consumption 3.5 watts
[3365] 1/2" NPT Pneumatic Valve - SPR-08-08	Manufacturer: Bifold Fluidpower Type: SPR-08-08-P16-32-NU-00-AL Material: SS316L Working pressure: 3-10 bar@ NC Working pressure: 5-10 bar@ NO Operating temperature range: -60°C to +100°C Cv value 3.9 SPR-08 standard service, poppet valve 08 Connection 1/2" NPT P16 pilot connection ¼" NPT-F / NO equalizer 32 3 ways, 2 positions NU Normally Universal (1->2 = NC / 3 ->2 = NO) 00 spring return AL seals fluorosilicone
[5753] 1" NPT Pneumatikventil - SPR-16-16-P16	Manufacturer: Bifold Fluidpower Type: SPR-16-16-P16-32-NU-00-AL Material: SS316L Operating pressure: 1-10 bar(g) Operating temperature range: -60°C to +100°C CV: 11.2 SPR-16 Pneumatic Spool Valve 16 Port 1" NPT P16 pilot operated valve - extended pilot control (1bar) 32 3 ways, 2 positions NU Normally Universal (1->2 = NC / 3 ->2 = NO) 00 spring return AL Fluorosilicone seals
PCV-08F-08F-13-023-V	Material: SS316L Operating pressure 0- 13 bar(g) Temp. range: -20°C to +180°C CV value: 4.2 PCV Pneum. check valve 08F IN, 1/2" NPT female thread 08F OUT, 1/2" NPT female thread 13 Operating pressure max 13 bar 023 Switch dp 0.023 bar V seals in Viton
Solenoid Valve	SJ06-E1-32-NC-00-87BA9 24VDC, W.P.2, 10BAR, 3 WAY
[3389] 1/4" NPT - MV - Bifold - FP10P - 77G	Type: FP10P-S1-04-32-NU-AL-77G-24D-57 Material: SS316L

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	Operating pressure: 0-10 bar(g) Operating temperature range: -55°C to +40°C (@T6) CV: 1 FP10P Standard Service (direct acting) S1 actuator: solenoid coil 04 1/4" NPT-F connections 32 3 ways, 2 positions NU Normally Universal (1->2 = NC / 3 ->2 = NO) AL Fluorosilicone seals (-55°C to +130°C) 77G Protection class: CU-TR/IECEx, Ex d IIC, Ex tb IIIC Db T4/5/6 24D power supply 24V DC 57 Power consumption 5.7 watts
[8142] 1/4" NPT MV - Bifold - FP06P-S1-A04	Manufacturer: Bifold Fluidpower Type: FP06P-S1-A04-32-NU-AL-27G-24D-57 Operating pressure: 0-10 bar Operating temperature range: -60°C to +40°C (@T6) CV: 1 FP06P solenoid valve (direct acting) S1 actuator: solenoid coil A04 1/4" NPT connection, aluminum housing 32 3 ways, 2 positions NU Normally Universal (1->2 = NC / 3 ->2 = NO) AL Fluorosilicone seals (-60°C to +130°C) 27G Protection class: CU-TR/IECEx, Ex d IIC, Ex tb IIIC Db T4/5/6 . aluminum casing 24D Power supply 24VDC 57 Power consumption 5.7 watts
[4170] 1/4" NPT Pneumtic Ventil - SPR-08-04	Make: Bifold Fluidpower Type: SPR-08-04-P1-32-NU-00-AL Material: SS316L Operating temperature range: -60°C + 100°C SPR-08 Standard Service, Spool Valve 04 Connection 1/4" NPT P1 Pilot connection (actuator) 32 3 ways, 2 positions NU Normally Universal (1->2 = NC / 3 ->2 = NO) 00 Spring return AL Seals Fluorosilicone
HIPEX - BIFOLD - 32	Make: Bifold Type: Hipex-32-11-AL-E Connection: IN & OUT 2" NPT Pilot control 1/4" NPT Material: SS316 Operating temperature range: -60°C to +40°C Cv: 50 HIPEX 2-way quick vent 32 2" NPT connections 11 Ratio 1:1

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	AL seals in fluorosilicone E 1 x exhaust air connection
[8173] 1/4" NPT - MV - Bifold - FP06P-S1-04	Manufacturer: Bifold Fluidpower Type: FP06P-S1-04-32-NU-AG-77G-24D-35 Material: SS316L Operating pressure: 0-10 bar(g) Operating temperature range: -55°C to +40°C (@T6) Cv: 0.5 FP06P series (direct-acting) S1 Actuator: solenoid coil 04 1/4" NPT-F connections 32 3 ways, 2 positions NU Normally Universal (1->2 = NC / 3 ->2 = NO) AG Silicone (-55°C to +90°C) 77G Protection class: CU-TR/IECEx, Ex d IIC, Ex tb IIIC Db T4/5/6 24D Power supply 24V DC 35 Power consumption 3.5 watts
X-42139-01	Direct Acting Relief Valve Make: Bifold Type: VRD-NS-0800-025-M38F-B14F-NP Replacement for VRD-SS-0800-025-B14F-B14F-NS-0700 Model Code: Relief Valve - Direct Acting PED Approved: No Body Material: 316 Stainless Steel NACE Compliant - Inlet Side Only Pressure Range: 450 - 800 bar Orifice: 2.5 mm Inlet Connection: 3/8 inch MP Tube Female Outlet Connection: 1/4 inch BSP Female Seal Material: Nitrile: -20 deg C to +80 deg C Seat material: 17-4 stainless steel Set Point: Setpoint to be minimum WP of valve unless specified at point of order Test Fluid: Mineral Oi
[16886] 1/4" NPT - MV - Bifold - FP06P-S1-04	Fabr.: Bifold Fluidpower Type: FP06P-S1-04-32-NU-S-77A-24D-35 Material: SS316L Operating pressure: 0-10 bar Operating temperature range: -20°C to +40°C (@T6) Cv: 0.6 FP06P series (direct-acting) S1 Actuator: Solenoid coil 04 1/4" NPT-F connections 32 3 ways, 2 positions NU Normally Universal (1->2 = NC / 3 ->2 = NO) S Nitrile seals (-20°C to +130°C) 77A Protection class: ATEX/IECEx, Ex d IIC Gb, Ex tb IIIC Db T4/5/6

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	24D Power supply 24V DC 35 Power consumption 3.5 watts
1/2” NPT - Throttle valve - AS12	[1191] Brand: Bifold Fluidpower Type: AS12-CPV Material: SS316L Operating pressure 0- 12 bar(g) Operating temperature range: -60°C to +40°C AS12 Arctic Service, 1/2"NPT CPV Cylinder Plug Valve
1/4" NPT - Throttle Valve - AS06-CPV	[1259] Brand: Bifold Fluidpower Type: AS06-CPV Material: SS316L operating pressure 1-12 bar(g) Operating temperature range: -60°C to +40°C Cv: 2.0 AS06 Arctic Service, 1/4" NPT connection CPV Cylinder Plug Valve
1/2" NPT Pneumatic Valve - SPR-08	[3924] Fabr.: Bifold Fluidpower Type: SPR-08-08-P1-32-NU-00-AL Material: SS316L Operating temperature range: -60°C to +100°C Cv: 3.9 SPR-08 Artic Service, Spool Valve 08 Connection 1/2" NPT P1 pilot connection (actuator) 32 3 ways, 2 positions NU Normally Universal (1->2 = NC / 3 ->2 = NO) 00 spring return AL seals fluorosilicone
1/4” NPT check valve - AS06-C1	[6280] check valve Brand: Bifold Fluidpower Type: AS06-C1 Material: SS316L Operating pressure 0- 12 bar(g) Operating temperature range: -55°C to +100°C AS Arctic Service 06 1/4" NPT Female C1 Check valve
Nema 4X/ IP66 IP67	
XW-00-00790-0520-3-4-CC-V-04-03	

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
XW-00-00790-0520-3-4-CC-H-04-04	Complete Piston Pump
FP12P-S1-08-32-NU-V-74A9-24D-ML-65-XX	DIRECT ACTING SOLENOID VALVES - FP12P Manual Reset *'mportant
FP06P-S1-04-32-NU-V-58A-135-ML	3/2 way solenoid valve Make: Bifold Fluidpower Type: FP06P-S1-04-32-NU-V-58A-135-ML Material: SS316L Operating pressure: 0 - 10 bar Operating temperature range: -20°C to +60°C (@T6) CV: 0.35 FP06P series (direct-acting) S1 Actuator: Solenoid coil 04 1/4" NPT connections 32 3 ways, 2 positions NU Normally Universal (1->2 = NC / 3 ->2 = NO) V Viton seals (-20°C to +90°C) 58A Protection class: ATEX/IECEx ia IIC T6 Ga 135 Coil resistance 135 Ohm . (80mA at 12V current consumption) ML Manual Reset (Electrical and manual . required to latch or temporary manual override)
FP06P-S1-04-32-NU-S-74AT4-24D-36	Make: Bifold Fluidpower Type: FP06P-S1-04-32-NU-S-74AT4-24D-36 Material: SS316L Operating pressure: 0-10 bar(g) Operating temperature range: -20°C to +50°C (@T4) CV: 1 FP06P series (direct-acting) S1 Actuator: Solenoid coil 04 1/4" NPT-F connections 32 3 ways, 2 positions NU Normally universal (1->2 = NC / 3 ->2 = NO) S Nitrile O-rings (-20°C to +130°C) 74AT4 Protection class: ATEX/IECEx, Ex emb IIC T4 Gb, . Ex tD IIIC A21 T120°C Db 24D Power supply 24V DC 36 Power consumption 3.6 watts
SH1018-2288	
1553	X5-10BAR Manometer Ø50mm, pressure range 0-10 bar, Threaded connection 1/8" NPT Material: Stainless steel
BXS-04-04-P9-32-NC-M15-K54-L21-PSV	[X-46081-01] BXS-04-04-P9-32-NC-M15-K54-L21-PSV Manufacturer: Bifold Fluidpower Type: BXS-04-04-P9-32-NC-M15-V-K54-L21-PSV

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	Material: SS316L Operating pressure: 2-12 bar(g) Operating temperature range: -15°C to +130°C CV: 0.73 BXS-04 series 04 Connection ¼" NPT-F thread P9 Air or Hydraulic latch Pilot Operator - 1/8" NPT 32 3 ways, 2 positions NC Normally Closed M15 Pull - Spring return panel mount V Vition seals (-15°C to +130°C) K54 Block after bleed L21 1/4" Pilot Connection PSV Pressure sensing valve
ASH12-FR-SR-MD-10-X4	[876] Manufacturer: Bifold Fluidpower Type: ASH12-FR-SR-MD-10-X4 Material: SS316L Operating temperature range: -60°C to +100°C ASH12 Arctic Service, 1/2"NPT connector FR Filter / Regulator SR Self Relieving (Pressure Relief) MD Manual Drain (Manual Condensate Drain) 10 0.4 - 10 bar output pressure range X4 40 - 50µm filter element
FP06P-S1-04-32-NU-V-77A-24D-35	Manufacturer: Bifold Fluidpower Type: FP06P-S1-04-32-NU-V-77A-24D-35 Material: SS316L Operating pressure: 0-10 bar(g) Operating temperature range: -20°C to +40°C (@T6) CV: 0.6 FP06P series (direct acting) S1 Actuator: Solenoid coil 04 1/4" NPT-F connectors 32 3 ways, 2 positions NU Normally Universal (1->2 = NC / 3 ->2 = NO) V Viton O-rings (-20°C to +90°C) 77A Protection class: ATEX/IECEx, Ex d IIC Gb, Ex tb IIIC Db T4/5/6 24D Power supply 24V DC 35 Power consumption 3.5 watts
VBP-16-11-V	Manufacturer: Bifold Fluidpower Type: VBP-16-11-V Material: SS316L Operating temperature range: -20°C to +180°C CV: 11 VBP Volume Booster, Piston 16 1" NPT ports

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	11 Translation ratio 1 : 1 V Viton seals Weight: approx. 8.1 kg
X5 Manometer	
Bxs-04-04-E5-32-Nc-00-V-77a-24d-18-K85-K6	
Sj06-E5-32-Nc-00-77a-24d-15-K6-K85	
Fp06p-S1-04-32-Nu-V-77a-230a-57	1/4" NPT - MV - Bifold - FP06P-S1-04 Make: Bifold Fluid Power Type: FP06P-S1-04-32-NU-V-77A-230A-57 Material: SS316L Operating pressure: 0-10 bar (g) Operating temperature range: -20 ° C to + 40 ° C (@ T6) Cv: 0.75 FP06P Standard Service (direct acting) S1 actuator: solenoid 04 1/4 "NPT-F connectors 32 3 ways, 2 positions Normally Universal (1-> 2 = NC / 3 -> 2 = NO) V Viton seals 77A Degree of protection: ATEX / IECEx II 2 G / D, Ex d IIC T4 / 5/6 230A power supply 230V AC 57 power consumption 5,7Watt Weight: approx. 2.1 kg Customs tariff number: 8481 20 90
S06-C44-E5-32-Nc-00-77a-24d-30	
Sh12-Fr-Sr-Ad-10-X3	
1/2quot; Npt - Booster - Bifold -Vbp08	
Fp06p-S1-04-32-Nu-V-77a-24d-35	
Fp15/S3/04/32/S/77a-24d/30	
Pcv-04f-04f-13-023-V	
As06-Psv	
Ash19-Fr-Sr-Md-10-X4-02	
Fp06p-S1-N4-32-Nc-V-77a-24d-57	
Ash19l-Fr-Sr-Md-10-X3-K39	

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
Se09-Qev-K6	
Fp06p-S1-04-32-Nu-S-77a-24d-57	
Sh12-Fr-Sr-Md-10-X3	
S12-Cpv	
X8 Manometer - 0-10bar	
S12-P4-32-Nc-00	
Fp01/S2/M/32/Nc/S/77a-24d/30/[m221]	
As06-Prx.X	
Sjje06-M2-32-Nc-00-K22	
Typ: 14540-03	
Ash19-Fr-Sr-Md-10-X4-K39	
Fp15/S1/04/32/S/78a-155	
Ash12-Fr-Sr-Md-10-X3	
Typ: 14640-01 Ã220;Berdruckventil (Cartridge Relief Valve) Fabr.: Bifold/ Marshalsea Material: Ss316 Einstellbereich: 100-400bar	
Se06-Fc1	
Fp200	
Fp15e/L1/04/32/S	
Bv0108f0210erv6k	
Pi73-01801-00-02-02-Ts-Nit-0388	
Ep000/D/Tb	
S06-C1 S.N:0702-1220 W.P:1 12 Barg , By Pcv-04f-04f-13-023-V	
Fp-870a9 - Obsolete (Replaced By Fp06p-S1-04-32-Nu-S-77a-24d-57)	
Pcv-08f-08f-13-023-V	

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Ürün	Açıklama
1/2quot; Npt Filter / Regler - Bifold - Ash12	
Ash19l-Fr-Sr-Md-10-X1-K39	
Fp06p-S1-04-22-Nc-V-77a-24d-35	
Fp15e/L11/04/32/S	
Fp15-S1-04-32-S-98c-A9 Obsolete, Replaced By Fp15/S1/04/32/S/78a-155	
Fp01/S1/M/32/Nc/S/77a-24d/M/15	
14340-02	Safety relief valve, type 14340, 3/4 NPT female, 316 steel, 5-50 bar
14340-03	

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.