


Dosatron

Garanti: 12 ay
Bu ¼r¼ne ait T¼rkiye i¼i kapı teslim fiyat ve teslim s¼resi i¼eren teklifimizi almak i¼in info@yursat.com.tr e-posta adresine baŐvuru yapabilir ya da ayrıntılı bilgi i¼in +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaŐabilirsiniz.
Dosatron Markası, tedarik s¼resi i¼in l¼tfen bizimle iletiŐime ge¼iniz.

Firmamız Dosatron T¼rkiye Distrib¼t¼r¼ veya temsilcisi deĐildir. Firmamız sipariŐ durumunda, belirtilen ¼r¼nlerde sadece Orjinal ve yeni ¼r¼n teklifi sunmaktadır. Bu sitede g¼sterilen ¼zel marka adları ve ticari markalar ilgili sahiplerinin m¼lkiyetindedir, talep durumunda kaldırılmaktadır.

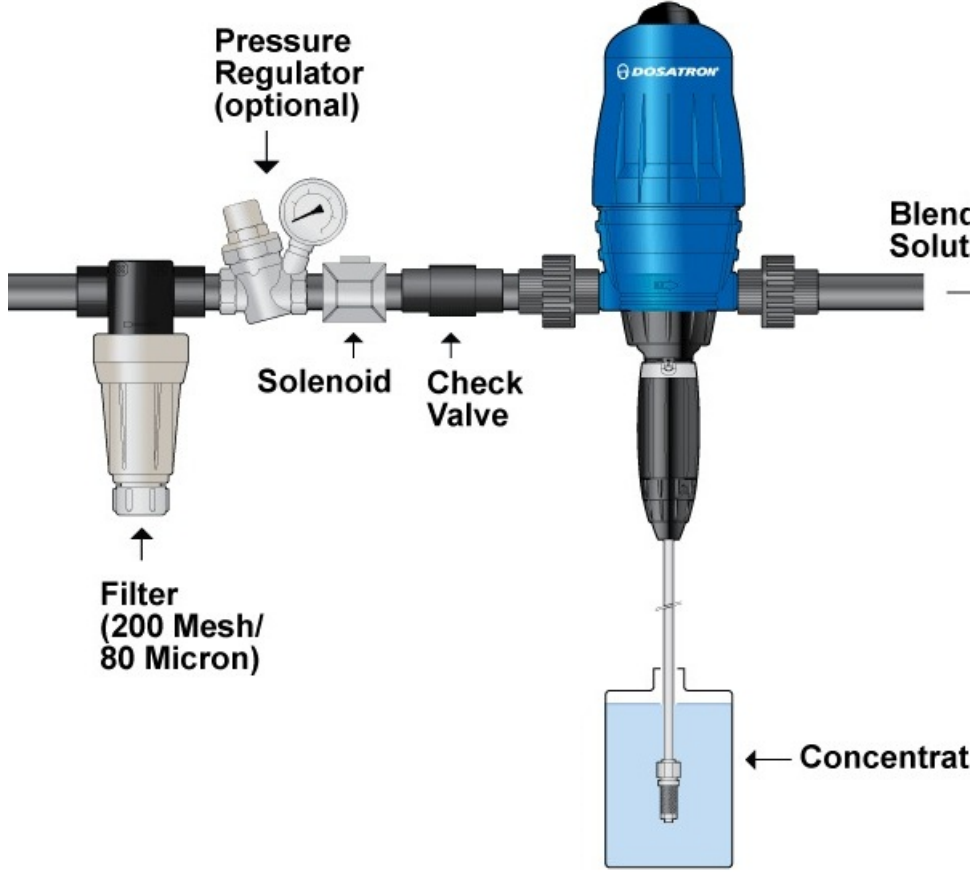

¼r¼n	A¼ıklama
D 3 Re 10 Vf	Proportional dispenser Water flow: 10-3000l / h Water inlet pressure: 0.5-6 bar Dosing adjustable from 1-10% Housing material: polypropylene Sealing material: VF Max. Water temperature: 40 ° degrees Incl. Suction hose 16x22 with filter Wall bracket Delivery time: immediately via DPD FREE HAUS Weight: approx. 4 kg including packaging Customs tariff number: 84135040 Country of origin: France
Cd088vf Kit Dosing Section Vf	84139100 FR
D 3 RE 10 VF	Proportional feeder Water throughput: 10-3000l / h Inlet water pressure: 0.5-6 bar Dosing adjustable from 1-10% Housing material: polypropylene Sealing material: VF Max. Water temperature: 40 degrees Including suction hose 16x22 with filter Wall bracket Delivery time: immediately by DPD FREE HOUSE Weight: approx. 4 kg including packaging Customs tariff number: 84798997 Country of origin: France
	Piston metering pump Plunger metering pumps type Doseuro A125N-25 / I-11 DV E with electrical stroke length

A125N-25/I-11 DV E	adjustment 0-100%, 4-20 mA input signal, type MVH56 Dosing capacity: 13.2 l / h Max. Operating pressure: 20 bar Stroke frequency: 35 strokes / min Connection: 1/2 "BSP internal thread Material: Pump head: SS316 Piston: SS316 Piston packing: NBR Valves: SS316 Valve seals: Viton Motor: 0.18kW, 3ph, 230 / 400V, 50Hz, 4 pol., IP55
20PJ025	
20PJ030MINI-H	
3/4 "	
BA BM 015	
BA BM 040	
BA BM 050	
CD072	
D 25 RE 09 VFO--- Orange = Sonderfarbe	
D 3 RE 25 IE VF	
D 3 RE 5 V VF	
D 8 RE 2 AF	
D14MZ10	
D20SVF	
D25RE2	
D25RE2AF	
D25RE2AO	
D25RE5	Dozaj Pompası
D3 RE10 V VF	
D36L10	
D3GL10	
D3RE10PVDF	
DST-DSR-1105-	D3RE2VF DOSATRON proportional doser Water flow rate: 10- 3000 l/h Water inlet pressure: 0.3-6 bar Dosage adjustable from 0.2-2% max. water temperature: 40°C Nominal diameter standard: 8x12 mm Housing material: polypropylene Sealing material: VF Incl. suction hose with filter, wall bracket
D3RH10	
D45RE/IE3	

D45RE3000
D45RE3AF
D45RE8
D8GL2
D8RE3000
DI110-2,5M3/H-1-5
DI1500VF-2,5 M3/H
DI45RE3
DIA4RE
DN-100N-120/58-13
Dosatron D8R
DRV 15 N
DRV 20 N
DRV 40 N
EM002
IPK34-14GPM
J009
MDF 1
MDI036
MiniDos 12
MPDI206
PCDI030
PCDI030VF
PDI410
PDI495
PDI498
PJ137AF
PJDI119VF
PJDI120V VF
PU1D25RE2IEPO

SIZDIRMAZLIK CONTASI	
W100 RS485	
PJ085	Bausatz Deckel, blau,
J042HT	O-Ring
D25 RE 10 VVFR	
DST-TOP-3007	D3RE10VVF DOSATRON proportional doser Water flow: 10-3000 l/h Water inlet pressure: 0.5-6 bar Addition adjustable from 1-10% Housing material: polypropylene Seal material: VF Max. water temperature: 40°C with filter and wall mount additional 2.5m suction hose in viscous design 20x27 mm
D9GL5	
D3GL10	Dosatron Dosierer GREEN SN 22xxxxx
D9GL5BP	Dosatron Dosierer GREEN SN 22xxxxx
D3RE10V	Dosatron Dosierer 3m ² blue SN 21xxxxx
D3 RE2 (%0,2-2)	
D3RE2AF	Dosatron dispenser 3m ³ AF, 0,2% - 2,0%
D25RE5V	Dosatron D25RE5VF: Dosatron dispenser 2.5m ³ VF, 1% - 5%
D3RE5VF	Alternatively Dosatron D3RE5VF: Dosatron dispenser 3m ³ blue VF, 0.5% - 5.0%
D3RE2VF	Dosatron dispenser 3m ³
D3RE2AF	
5031999	POMPA HİD.A-125EN-25/37-11DV-E 0.910498.G (DOSATRON)
D3 RE 10	3 m ³ /h
D25RE10VVF	
D25RE5V	Dosatron dispenser 2.5m ³ VF,
D25RE10VF	D25RE10 Dosatron dispenser 2.5m ³ VF, 3% - 10% ! Danger ! 2 m ³ /h
An alternative is the D3RE10VF:	D3RE10V Dosatron Dosierer 3m ³ blau VF, 1% -10%
D3 RE2	
DST-DSR-1105	Water flow: 10-3000 l/h Water inlet pressure: 0.3-6 bar Addition adjustable from 0.2-2% max. water temperature: 40°C Nominal width standard: 8x12 mm Housing material: polypropylene Seal material: VF Incl. suction hose with filter, wall bracket
D3GL2VF DOSATRON proportional doser Water flow rate: 10-3000 l/h Water inlet pressure: 0.3-6 bar Dosage adjustable from 0.2-2% max. water temperature: 40°C Nominal	

DST-DSR-1120	diameter standard: 6x9 mm Housing material: polypropylene, green Sealing material: VF Incl. suction hose with filter, wall bracket
D25RE2	
D3RE5 VVF	
D25RE2VF	2,5 m ³ VF, 0,2%-2%
D25RE2BPVF	2,5m ³ VF, 0,2%-2% with bypass lever
D-101N-90/F13	
hook spring	for D25RE2 pump
D25RE2	
D25RE10	D25RE10VF2,5m ³ VF 3% -10%
D25RE10BPVF	2,5m ³ VF3%-10% Bypasshebel
D3RE2VF DOSATRON Proportionaldosierer	DST-DSR-1105 Water flow rate: 10-3000 l/h Water inlet pressure: 0.3-6 bar Dosage adjustable from 0.2-2% max. water temperature: 40°C Nominal diameter standard: 8x12 mm Housing material: Polypropylene Sealing material: VF Incl. suction hose with filter, wall bracket
D3RE2AF DOSATRON Proportionaldosierer	DST-DSR-1104 Water flow rate: 10-3000 l/h Water inlet pressure: 0.3-6 bar Dosage adjustable from 0.2-2% max. water temperature: 40°C Nominal diameter standard: 8x12 mm Housing material: Polypropylene Sealing material: AF Incl. suction hose with filter, wall bracket
D9GL5BPVF	LINE 9M ³ /h , 1%-5%
D3RE10.3 M³/h . 1-10 %	
DST-DSR-1221	D9RE2VFLDT DOSATRON proportional doser Water flow rate: 500-9000 l/h Water inlet pressure: 0.3-8 bar Dosage adjustable from 0.2-2% Maximum water temperature: 40°C Standard nominal size: 16x22 mm Housing material: Polypropylene Sealing material: VF Includes suction hose, foot valve, wall bracket LDT-OPT-6013 2x PVC screw fitting for D8 and D9 (2x) 1 1/2" female-male thread
Art. DST-EST-6027	20J024VF O-ring seal VF
Spare Parts	D25RE5
Art. DST-EST-7361	PE011 Partial kit metering cylinder
Art. DST-EST-8080	PDI496 locking ring
Art. DST-EST-7262	PDI494 Mother
Art. DST-EST-7263	PDI495 adjusting nut
Art. DST-EST-8080-	PDI496 locking ring

Art. DST-EST-8039	PDI1210 Anti-rotation ring
Art. DST-EST-7749	PPDI069 Base kit: Dosing body and anti-rotation ring
Art. DST-EST-6391	CD088VF Kit Dosing Unit VF
Cd088v	
Druckminderer R1/2quot; (We Need The Item Number)	
8cd035htaf	Bausatz Dosierteil HT/AF HL: Frankreich / ZTN: 84139100
D25re/Ie10	
D 3 Re 5 Vf Bp	
Di210vafpy	
D25 De5 - , D 25 Re 5 Vf	
D25re09ao	
Em004af For D25re4	
D25re/Ie5	
D 25 Re 10 Vf	
8pj040	
Di520-7 Gpm - , Possible D 3 Re 25 Ie Vf	
D 8 Re 2 Gl	
8pj018vf	Wir besitzeb das folgende modell D25RE10VVF
D25re1500	
Attached Image	
D 3 Re 2 Vf	
Ab8n-13dv	
D3re2vf	
D 25 Re 4 Vf	
D8re5	
D 07 Re 5	
MpdI206	
D3re5.3m3/H.0.5-5%	
B2520 N-90/56-43 Poz21	
B250-90-112-41	

D 3 Re 10 V Vf	Proportional feeder D 3 RE 10 V VF Water flow rate: 10-3000l / h Water inlet pressure: 0.5-6 bar Dosage adjustable from 1-10% Housing material: polypropylene Seal material: VF Max. Water temperature: 40 ° degrees Incl. 2.5m suction hose in viscous version 20x27 with filter wall mount Country of origin: France Customs tariff number: 84135040 Weight: approx. 4.5 kg incl. Packaging
A250n76112-11	
D25re 5 Vf	proportional metering Water flow rate: 10-2500l / h Water inlet pressure: 0.5-6 bar Addition adjustable from 1-5% Housing material: polyacetal Seal material: VF Max. Water temperature: 40 ° degrees Incl. Suction hose 12x16 with filter wall mount
D 3 Re 25 Ie	
8pj018af	
Cc1n	
D8r150 8mã179;/H ? 1-5% - , Successor D 8 Re 5 Vf	
D 25 Re	
8pj017	
Pj094af For D25re4	
Jdi123af	Dichtungsscheibe AF
D8re2	
D 3 Re 3000 WI Af	
D3gl2vf.	
D25re4 Af(Exd400reaf)	
D25re10 - 2m3/H	
D 25 Re 2 Vf	proportional metering Water flow rate: 10-2500l / h Water inlet pressure: 0.3-6 bar Metering adjustable from 0.2-2% Housing material: polyacetal Seals: VF Max. Water temperature: 40 degrees Incl. Suction hose with filter wall mount Weight: approx. 2.5 kg incl. Packaging Customs tariff number: 84135040 Country of origin: France
A250n76-11211	
D8re5vf [ex. D8r150]	
A250n7611211	
Pdi 043 - , Mpdı206	
D 25 Re 4	

D 07 Re 5 Vf	
D45re15	
D25re/Ie2	
8pj052af	
D25re10	
Di150	
D07re125	
D3re5 - Dosatron D3re5 3m3/H 0,5-5% Af	
D 25	
Cover For D400re	
D25re09	
D 8 Re 5 Vf	
Pj094vf For D25re4	
Em004vf For D25re4	
Pjdi113 Kit Lower Pump Housing Blue	HL: France / ZTN: 84139100 with mixing chamber + seal + wall bracket
B250-50-112-41	
Pdi054	