
Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

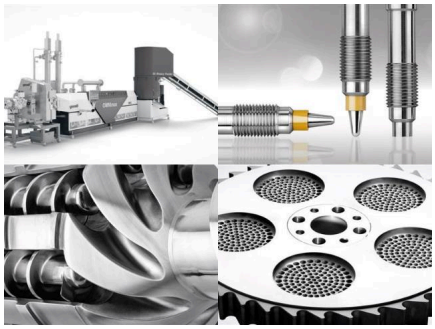

Gneuss

Garanti: 12 ay

Bu ürüne ait Türkiye içi kapı teslim fiyat ve teslim süresi içeren teklifimizi almak için **info@yursat.com.tr** e-posta adresine ya da www.yursat.com.tr/iletisim adresindeki iletişim formu üzerinden bizlere ulaşabilirsiniz.

Gneuss Markası, tedarik süresi için lütfen bizimle iletişime geçiniz.

Firmamız Gneuss Türkiye Distribütörü veya temsilcisi değildir. Firmamız sipariş durumunda, belirtilen ürünlerde sadece Orjinal ve yeni ürün teklifi sunmaktadır. Bu sitede gösterilen Özel marka adları ve ticari markalar ilgili sahiplerinin mülkiyetindedir, talep durumunda kaldırılmaktadır.

Ürün	Açıklama
Dai-2e2-12a-B50z-S0-F5-B-N-6p	MT102XXXX000000 Melt pressure transducer with 4-20mA output Technical specifications ---------- - In DMS full bridge technology - Supply voltage 19-32 VDC - Zero point correction without the influence of gain - 80% calibration point - nominal temperature max. 500 ° C - Max. Temperature at the membrane 500 ° C - Filling medium: NaK - measuring accuracy +/- 0.5% - Screw-in thread: 1/2 " 20 UNF 2A - Measuring range 0-500 bar - Rigid shaft 152mm and flexible protective spring 457mm - Membrane with special GX coating - Signal output 2-wire, 4-20 mA
Da-250-12a-B50z-S0-F5-B-N-6p	MT101XXXX000000 Melt pressure transducer with mV / V output Technical specifications ---------- - In DMS full bridge technology - Filling medium: NaK - supply voltage max. 10 VDC - nominal temperature max. 500 ° C - Max. Temperature at the membrane 500 ° C - Measurement accuracy: +/- 0.5% - Sensitivity 3.33mV / V - Screw-in thread 1/2 " 20UNF 2A - Measuring range 0-500 bar - Rigid shaft 152mm and flexible protective spring 457mm - Membrane with special GX coating
DTAI-1E2-PT3-12A-P60H-S2-F5-R-N-6PA	MT103XXXX000000 Melt pressure transducer with 4-20mA output Technical specifications

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	---------- - In DMS full bridge technology - Supply voltage 19-32 VDC - Zero point correction without gain influence - 80% calibration point - Nominal temperature max. 500 ° C - Max. Temperature at the membrane 500 ° C - Filling medium: NaK - Rigid shaft 254 mm and flexible protective spring 457 mm - Resistance element PT100, 3-wire - measuring accuracy +/- 0.25% - Screw-in thread: 1/2 " 20 UNF 2A - Measuring range 0-6000 psi - Signal output 2-wire, 4-20 mA - with optical auto zero actuation
DAI-2E2-12A-B60Z-S0-F0-R-W-6P	MT102B60Z037600 Melt pressure transducer with 4-20 mA output Technical specifications: ---------- - In DMS full bridge technology - Supply voltage 19-32 VDC - Zero point correction without influence of gain - 80% calibration point - Nominal temperature max. 300 ° C - Max. Temperature at the membrane 300 ° C - Filling medium: mercury-free - measurement accuracy +/- 0.5% - Screw-in thread: 1/2 " 20 UNF 2A - Measuring range 0-600 bar - Rigid shaft 152mm - Signal output 2-wire, 4-20 mA
DTAI-1E2-PT3-12A-P60H-S0-F5-R-N-6P	Pressure Transmitter with Integrated temperature MT103P60H020100 Technical specifications ---------- - In DMS full bridge technology - Supply voltage 19-32 VDC - Zero point correction without gain influence - 80% calibration point - Nominal temperature max. 500 ° C - Max. Temperature at the membrane 500 ° C - Filling medium: NaK - Rigid shaft 152 mm and flexible protective spring 457 mm - Resistance element PT100, 3-wire - measuring accuracy +/- 0.25% - Screw-in thread: 1/2 " 20 UNF 2A - Measuring range 0-6000 psi - Signal output 2-wire, 4-20 mA

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
MT101B50Z003400	
MT102B35Z001400	
MT102B40Z010900	
MT102B50Z004800	
MT102B60Z000400	
MT108B10H009200	
MT201PT4L007500	
MT201TH1J001000	
MT201TH1J004500	
MT203TH1J000600	Melt temperature sensor without insulation TF-MX-12A-05S-S0-F1-T1J-2T Technical Data ---------- - Sturdy all-metal design - Sensor protection class IP 50 - max. operating temperature 450°C - max. melt pressure 2000 bar - Standard connector type J - Cable outlet approx. 100mm - potential-free insulated thermocouple Fe-CuNi, type J - Screw-in thread 1/2" - 20 UNF 2A - rigid shaft 152 mm - Measuring tip length 5 mm
Gneuß	
MT102B50Z057400	Melt pressure converter with 4-20mA output DAIL-2E3-12A-B50Z-S0-F5-R-W-6P - In DMS full bridge technology - Supply voltage 19-32 VDC - Zero point correction without gain influence - 80% calibration point - Nominal temperature max. 300°C - Max. temperature at the membrane 300°C - Filling medium: Mercury-free - Measurement accuracy +/- 0.5% - Thread: 1/2" 20 UNF 2A - Measuring range 0-500 bar - Rigid shaft 152mm and flexible protective spring 457mm - Signal output 3-wire, 4-20 mA
MT103B70Z009200	Melt pressure transducer with 4-20mA output

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	DTAI-2E2-THJ-12A-B70Z-S0-F5-R-W-6P Technical specifications ---------- - In DMS full bridge technology - Supply voltage 19-32 VDC - Zero point correction without gain influence - 80% calibration point - Nominal temperature max. 300°C - Max. temperature at the membrane 300°C - Filling medium: Mercury-free - Rigid shaft 152 mm and flexible protective spring 457 mm - Potential-free thermocouple Fe-CuNi type J Measurement accuracy +/- 0.5% - Screw-in thread 1/2" 20 UNF 2A - Measuring range 0-700 bar - Signal output 2-wire, 4-20 mA
DAI-2C4-12A-B60Z-S0-F0-R-W-98	MT102B60Z000400 Melt pressure transducer with 0-10 V output Technical specifications: ---------- - In DMS full bridge technology - Supply voltage 19-32 VDC - Zero point correction without gain influence - 80% calibration point - Nominal temperature max. 300°C - Max. temperature at the membrane 300°C - Filling medium: Mercury-free - Measurement accuracy +/- 0.5% - Thread: 1/2" 20 UNF 2A - Measuring range 0-600 bar - Rigid shaft 152mm - Signal output 4-wire, 0-10 V - Plug-in connection in 98 design
MT102B60Z000400	Melt pressure transducer with 0-10 V output DAI-2C4-12A-B60Z-S0-F0-R-W-98 Technical data: ---------- - In DMS full bridge technology - Supply voltage 19-32 VDC - Zero point correction without gain influence - 80% calibration point - Nominal temperature max. 300°C - Max. temperature at the membrane 300°C - Filling medium: Mercury-free - Measurement accuracy +/- 0.5% - Thread: 1/2" 20 UNF 2A - Measuring range 0-600 bar - Rigid shaft 152mm

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	- Signal output 4-wire, 0-10 V - Plug-in connection in 98 design
MT101XXXX000000	Melt pressure sensor with mV/V output DA-250-12A-B50Z-S0-F5-BN-6P Technical data ---------- - In DMS full-bridge technology - Filling medium: NaK - Supply voltage max. 10 VDC - Nominal temperature max. 500°C - Max. temperature on the membrane 500°C - Measurement accuracy: +/- 0.5% - Sensitivity 3.33mV/V - Screw-in thread 1/2" 20UNF 2A - Measuring range 0-500 bar - Rigid shaft 152mm and flexible protective hose 457mm - Membrane with special coating GX-Coating
MT102XXXX000000	Melt pressure transducer with 4-20 mA output DAI-2E2-12A-B50Z-S0-F5-BN-6P Technical data ---------- - In DMS full-bridge technology - Supply voltage 19-32 VDC - Zero point correction without gain influence - 80% calibration point - Nominal temperature max. 500°C - Max. temperature on the membrane 500°C - Filling medium: NaK - Measurement accuracy +/- 0.5% - Screw-in thread 1/2" 20 UNF 2A - Measuring range 0-500 bar - Rigid shaft 152mm and flexible protective hose 457mm - Signal output 2-wire, 4-20 mA - Membrane with special coating GX-Coating
MT103B70E010800	Melt pressure transducer with 4-20mA output DTAI-2E2-THJ-12A-B70E-S0-F5-RW-6P Technical data ---------- - In strain gauge full bridge technology - Supply voltage 19-32 VDC - Zero point correction without gain influence - 80% calibration point - Nominal temperature max. 300°C - Max. temperature on the membrane 300°C - Filling medium: mercury-free - Rigid shaft 152 mm and flexible protective spring 457 mm - potential-free thermocouple Fe-CuNi type J

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	- Measurement accuracy +/- 0.5% - Screw-in thread: 1/2'' 20 UNF 2A - Measuring range 0-70 bar - Signal output 2-wire, 4-20 mA
MT102B35Z001600	Melt pressure transducer with 4-20 mA output DAI-2E2-12A-B35Z-S0-F5-RW-6P Technical data: ---------- - In strain gauge full bridge technology - Supply voltage 19-32 VDC - Zero point correction without gain influence - 80% calibration point - Nominal temperature max. 300°C - Max. temperature on the membrane 300°C - Filling medium: mercury-free - Measurement accuracy +/- 0.5% - Screw-in thread: 1/2'' 20 UNF 2A - Measuring range: 0-350 bar - rigid shaft 152mm and flexible protective spring 457mm - 2-wire signal output: 4-20mA
KP100_0010	Pressure connection cable P-1-10 Length: 10 m, 6-core, shielded, PVC sheath with mounted Cable socket PT06W-10-6S for the pressure sensor.
KT11J_0010J	Temperature connection cable TS-1-10-1J for GDTA/GDTAI with single thermocouple Fe-CuNi Length: 10 m, 2-core compensation cable FeCuNi (black/white) type J, including 2-pin connection
MT103B10H004400	Melt pressure transducer with 4-20mA output DTAI-2E2-THJ-12A-B10H-S0-F5-RW-6P Technical data ---------- - In strain gauge full bridge technology - Supply voltage 19-32 VDC - Zero point correction without gain influence - 80% calibration point - Nominal temperature max. 300°C - Max. temperature on the membrane 300°C - Filling medium: mercury-free - Rigid shaft 152 mm and flexible protective spring 457 mm - potential-free thermocouple Fe-CuNi type J - Measurement accuracy +/- 0.5% - Screw-in thread 1/2'' 20 UNF 2A - Measuring range 0-1000 bar - Signal output 2-wire, 4-20 mA

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
DTAI-2E2-THJ-12A-B70Z-S0-F5-R-W-6P	DMS full-bridge technology Supply voltage: 19–32 VDC 4–20 mA output (2-wire system) Zero balance without gain influence Max membrane temperature: 300°C Measuring range: 0–700 bar Mercury-free filling Rigid stem: 152 mm, flexible protection spring: 457 mm Thread: 1/2" 20 UNF 2A Thermocouple: Fe-CuNi Type J Accuracy: ±0.5%
MT101B10H006300	Melt pressure sensor with mV/V output DA-250-12A-B10H-S0-F5-RW-6P Technical data ---------- - In DMS full bridge technique - Filling medium: mercury-free - Maximum supply voltage: 10 VDC - Maximum rated temperature: 300°C - Max. temperature on the membrane 300°C - Measurement accuracy: +/- 0.5% - Sensitivity 3.33mV/V - Screw-in thread 1/2" 20UNF 2A - Measuring range 0-1000 bar - Rigid shaft 152mm and flexible protective spring 457mm
170147 Daiv 200-1/2-600-0-1/98	
Tf-Mx-12a-05s-S0-F0-T1l-2g	
Tf-Mx-18a-25s-S0-F0-Pt2-2g	
100s075-Sc377	
Dtai-2e2-Thj-12a-B35z-S0-F5-R-W-6p	Melt pressure converter with 4-20mA output Technical specifications ---------- - In DMS full bridge technique - Supply voltage 19-32 VDC - Zero point correction without amplification influence - 80% calibration point - Nominal temperature max. 300 ° C - Max. Temperature at the diaphragm 300 ° C - Filling medium: mercury-free - Rigid shaft 152 mm and flexible spring 457 mm - potential-free thermocouple Fe-CuNi type J - Measuring accuracy +/- 0.5%

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	- Screw thread: 1/2 "20 UNF 2A - Measuring range 0-350 bar - Signal output 2-wire, 4-20mA
Da-200-18a-B80z-S0-F0-R-W-6p	
Da-250-12a-B35z-S9-F5-R-W-6p-Af7	
100s090-Sc378	
Dai-2e2-12a-B50z-S0-F5-R-W-6p	Melt pressure converter with 4-20mA output Technical specifications ---------- - In DMS full bridge technology - Supply voltage 19-32 VDC - Zero point correction without amplification influence - 80% calibration point - Nominal temperature max. 300 ° C - Max. Temperature at the membrane 300 ° C - Filling medium: mercury-free - Measuring accuracy +/- 0.5% - Screw thread: 1/2 "20 UNF 2A - Measuring range 0-500 bar - Rigid shaft 152mm and flexible spring 457mm - Signal output 2-wire, 4-20 mA
Da-250-12a-B35z-S0-F5-R-W-6p	
Mt102b50z004800 Schmelzedruckumformer Mit 4-20ma Ausgangdai-2e2-12a-B50z-S0-F5-R-W-6p	
Dtai-2e2-Thj-12a-B50z-S0-F5-R-W-6p	Melt pressure converter with 4-20mA output Technical specifications ---------- - In DMS full bridge technology - Supply voltage 19-32 VDC - Zero point correction without amplification influence - 80% calibration point - Nominal temperature max. 300 ° C - Max. Temperature at the membrane 300 ° C - Filling medium: mercury-free - Rigid shaft 152 mm and flexible spring 457 mm - potential-free thermocouple Fe-CuNi type J - Measuring accuracy +/- 0.5% - Screw thread: 1/2 "20 UNF 2A - Measuring range 0-500 bar - Signal output 2-wire, 4-20mA
Dai-2c4-12a-B60z-S0-F0-R-W-98	

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
Mt101b10h019900	
Dai-2e2-12a-B35z-S0-F5-B-W-6p	
Dtai-2e2-Thj-12a-B70z-S0-F5-R-W-6p	MT103B70Z009200 Melt pressure transducer with 4-20mA output Technical specifications ---------- - In DMS full bridge technology - Supply voltage 19-32 VDC - Zero point correction without the influence of gain - 80% calibration point - nominal temperature max. 300 ° C - Max. Temperature at the membrane 300 ° C - Filling medium: mercury-free - Rigid shaft 152 mm and flexible protective spring 457 mm - potential-free thermocouple Fe-CuNi type J - measuring accuracy +/- 0.5% - Screw-in thread 1/2 " 20 UNF 2A - Measuring range 0-700 bar - Signal output 2-wire, 4-20 mA
Dai-2e2-18a-B40z-S0-F0-R-W-6p	
Dai-2c4-12a-B60z-S0-F0-R-W-9	
Dai-2e2-12a-B35z-S0-F0-R-W-6p Sensor	
Dtai 2e2 Thj 12a B50z S0 F5 R W 6p	Melt pressure converter with 4-20mA output Technical specifications ---------- - In DMS full bridge technology - Supply voltage 19-32 VDC - Zero point correction without amplification influence - 80% calibration point - Nominal temperature max. 300 ° C - Max. Temperature at the membrane 300 ° C - Filling medium: mercury-free - Rigid shaft 152 mm and flexible spring 457 mm - potential-free thermocouple Fe-CuNi type J - Measuring accuracy +/- 0.5% - Screw thread: 1/2 "20 UNF 2A - Measuring range 0-500 bar - Signal output 2-wire, 4-20 mA
Tf-Mx-12a-10s-S0-F0-T1l-2g	

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.