
**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

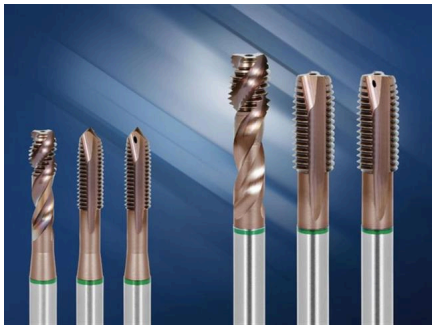

# Hoffmann

Garanti: 12 ay

Bu ürüne ait Türkiye içi kapı teslim fiyat ve teslim süresi içeren teklifimizi almak için **info@yursat.com.tr** e-posta adresine ya da www.yursat.com.tr/iletisim adresindeki iletişim formu üzerinden bizlere ulaşabilirsiniz.

**Hoffmann** Markası, tedarik süresi için lütfen bizimle iletişime geçiniz.

*Firmamız Hoffmann Türkiye Distribütörü veya temsilcisi değildir. Firmamız sipariş durumunda, belirtilen ürünlerde sadece Orjinal ve yeni ürün teklifi sunmaktadır. Bu sitede gösterilen Özel marka adları ve ticari markalar ilgili sahiplerinin mülkiyetindedir, talep durumunda kaldırılmaktadır.*

| Ürün | Açıklama |
|---|---|
| 21101705 3u Emc Ss Gasket 10 Pcs | EMC stainless steel seal 3U<br>(10 pieces)<br>***<br>Stat. Product number: 73201090<br>Country of origin: DE<br>***<br><<< RoHS compliant >>> |
| A808chfl | nVent, J Box, Type 12, Turn Latch,<br>203x203x102mm |
| A8p8g | nVent, Panel, J Box / 6.75x6.88 |
| 74-41210015204 | Plastic endless belt for HSF 100<br>- replaces our item no. 74-41510065 - |
| 111700 19W11 | |
| 74-41810016131 | Plastic endless belt CM series<br>for HSF 150 SE |
| D4/4-St-Ö-S-DC-363-158-A | Float switch 01-12258-S2 |
| 74-45842769 | Filter bag SENTINEL NMO-250-P01Z-60L |
| 79-50245115220 | Differential pressure indicator type deltaP |
| 203 ECH100 | Heater 100W<br><<< RoHS-konform >>> |
| 203 ECHT100 | Heater 100W<br><<< RoHS-konform >>> |
| 558855 | Dimensions: 125 mm x 50 mm x 20 mm<br><br>It will be used on both sides. One side must have a grit number of 500 and the other 180. |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| A90XM3EW24FTC | |
| ADSCPA | |
| AFK1224SS | |
| PGS2K | |
| DAH2001A | |
| ABBSC | |
| ADP2 | |
| CDSC483812 | |
| CMFKSS | |
| CP4836 | |
| PGS2K | |
| CMFKSS | |
| CP3030G | |
| CSD303010 | |
| APMT 180508 SR HB 7520 | |
| 74-41210017131 | Plastic endless belt for HSF 200<br><br>Replacement for item 74-41520070 |
| 74-41210016147 | Plastic endless belt for HSF 150<br>- Replacement for item 74-41515070 - |
| 74-41210014144 | Plastic endless belt for HSF 60<br>- Replacement for item 74-41506065 - |
| 74-41210015204 | Plastic endless belt for HSF 100 2,127.00 2,127.00<br>- Replacement for item 74-41510070 - |
| 741000 180 | |
| sliding bar wide 91 67 601 | h33-4/2019/ 12-0000108 |
| side panel wide right 91 67 596 | |
| side panel wide  left 91 67 595 | |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| HM element 87. 591. 67 598 | |
| gate valve 9163 184 | |
| compressor oil filter 505008 | |
| pump drive gear | |
| three-section hydraulic pump 636000121 | |
| Plastic endless belt for HSF 150 | - Replacement for 74-41515070 -<br>Article no. 74-41210016147 |
| Twist drill HSS-E-PM TiAlN | 114610 5<br>Fabrikat: GARANT |
| 354773 50/V25 | Reduction SK50 VDI<br>Make: GARANT |
| 354773 50/V30 | Reduction SK50 VDI<br>Make: GARANT |
| 354773 50/V40 | Reduction SK50 VDI<br>Make.: Garant |
| 354771 50/40 | Reduction SK50 SK |
| 338400 10 | Tap Extension<br>Make: HOLEX<br><br>use<br>For thread cutting in inaccessible places, such as deep recesses, shoulders, projecting edges<br>Devices, extremely deep internal threads or directly on cast walls.<br>execution<br>• Long or extra-long version.<br>• The front end of the extension is designed as a collet. By hand-tightening the knurled<br>The collet is clamped with the tap using the clamping nut.<br>• The torque is transmitted via the square.<br>• The rear end of the extension conforms to DIN, so the extension can be used in quick-change tapping bits<br>or tap ER collets with square. |
| 74-41210016147 | Plastic endless belt for HSF 150<br>- Replacement for 74-41515070 - |
| 558855 125X50 | Denomination: |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | Bench stone for steel, special carborundum medium / very fine<br>LengthXWidth (mm):<br>125X50 |
| 3WAY BALL VALVE | C674D901/002<br>Pos.7-28<br>38M-MNT |
| Plastic endless belt for HSF 100 | (Replacement item for 74-41510070)<br>Article no. 74-41210015204 |
| Plastic endless belt CM series HSF 150 | Article no. 74-41810016131 |
| 371600 18x200 | |
| 375300 1816160 | |
| 085726 20 | |
| 085725 150 | |
| A-EK115NDH | |
| 483910 / Ø15 | |
| 483900 02 | Ø15, Ø18 |
| 483914 0 | Ø30,Ø35 |
| 483910 02 / Ø18 | |
| 483900 02 / Ø15 | |
| 483900 02 / Ø18 | |
| 483914 0 / Ø30 | |
| 483914 0 / Ø35 | |
| 838350 | Universal deburrer with 1 blade S 150 |
| 839678 | HSS blade (rear deburring) for 83930 |
| L51050 788 | POLINOX fleece grinding point PNL Ø 30x25 m<br>PFERD No. 4007220087831 / 86,000x63,000x1 |
| L51100 184 | POLINOX fleece grinding point PNL Ø 40x20mm<br>PFERD No. 4007220157077 / 86,000x63,000x1 |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| 418802 500 | digital depth caliper<br>Brand: HOLEX<br>execution<br>Easy-to-read digital display. Optimum sliding properties thanks to double prism guide. Measuring bridge made of<br>hard-coated aluminum with two 90° offset holes (M2.5) to accommodate the measuring inserts.<br>scope of delivery<br>Including measuring probe no. 434900 size 2, 3 measuring bridges no. 418803 sizes 150, 300 and 450 mm, 1 battery no. 081560 size.<br>LR44 and factory test report. |
| 432210 10/58 | dial gauge waterproof<br>Brand: GARANT<br><br>execution<br>Precision dial gauges with shock protection, protected against splash water, oil and dirt. Measuring bolt on the shaft with<br>Rubber bellows, sealed at the top by a protective sleeve. Back wall sealed, watch glass and outer ring sealed<br>screwed. Clamping shaft Ø 8 mm h6. |
| 551850 6X10 | Polishing abrasive coarse (gray)<br>Brand: GARANT<br><br>use<br>For fine grinding and polishing of steel, rust- and acid-resistant steel, high-temperature resistant materials and<br>Non-ferrous metals. Polishing grinding pins do not clog even with smearing materials. For matt polishing or attaching<br>optical effects on stainless steel containers, etc. The elastic integration of the abrasive grain results in a very fine polish<br>achieved.<br>Not suitable for edges and rough surfaces.<br>execution<br>Polishing pins with normal corundum (A) in rubber-elastic bond.<br>GARANT polishing pens are characterized by a long service life for quickly achieving a fine, even surface<br>Depending on the version, even fine polishing up to a gloss polish can be achieved. GARANT polishing pens can<br>be profiled with dressing tools |
| 551850 8X10 | Polishing abrasive coarse (gray)<br><br>use<br>For fine grinding and polishing of steel, rust- and acid-resistant steel, high-temperature resistant materials and<br>Non-ferrous metals. Polishing grinding pins do not clog even with smearing materials. For matt polishing or attaching<br>optical effects on stainless steel containers, etc. The elastic integration of the abrasive grain results in a very fine polish |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | achieved.<br>Not suitable for edges and rough surfaces.<br>execution<br>Polishing pins with normal corundum (A) in rubber-elastic bond.<br>GARANT polishing pens are characterized by a long service life for quickly achieving a fine, even surface<br>Depending on the version, even fine polishing up to a gloss polish can be achieved. GARANT polishing pens can<br>be profiled using dressing tools. |
| 551900 6X10 | polishing abrasive medium (red)<br><br>use<br>For fine grinding and polishing of steel, rust- and acid-resistant steel, high-temperature resistant materials and<br>Non-ferrous metals. Polishing grinding pins do not clog even with smearing materials. For matt polishing or attaching<br>optical effects on stainless steel containers, etc. The elastic integration of the abrasive grain results in a very fine polish<br>achieved.<br>Not suitable for edges and rough surfaces.<br>execution<br>Polishing pins with normal corundum (A) in rubber-elastic bond.<br>GARANT polishing pens are characterized by a long service life for quickly achieving a fine, even surface<br>Depending on the version, even fine polishing up to a gloss polish can be achieved. GARANT polishing pens can<br>be profiled using dressing tools. |
| 551900 8X10 | polishing abrasive medium (red)<br><br>use<br>For fine grinding and polishing of steel, rust- and acid-resistant steel, high-temperature resistant materials and<br>Non-ferrous metals. Polishing grinding pins do not clog even with smearing materials. For matt polishing or attaching<br>optical effects on stainless steel containers, etc. The elastic integration of the abrasive grain results in a very fine polish<br>achieved.<br>Not suitable for edges and rough surfaces.<br>execution<br>Polishing pins with normal corundum (A) in rubber-elastic bond.<br>GARANT polishing pens are characterized by a long service life for quickly achieving a fine, even surface<br>Depending on the version, even fine polishing up to a gloss polish can be achieved. GARANT polishing pens can<br>be profiled using dressing tools. |
| 551920 6X10 | polishing abrasive fine (brown)<br><br>use |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

| Ürün | Açıklama |
|---|---|
| | For fine grinding and polishing of steel, rust- and acid-resistant steel, high-temperature resistant materials and<br>Non-ferrous metals. Polishing grinding pins do not clog even with smearing materials. For matt polishing or attaching<br>optical effects on stainless steel containers, etc. The elastic integration of the abrasive grain results in a very fine polish<br>achieved.<br>Not suitable for edges and rough surfaces.<br>execution<br>Polishing pins with normal corundum (A) in rubber-elastic bond.<br>GARANT polishing pens are characterized by a long service life for quickly achieving a fine, even surface<br>Depending on the version, even fine polishing up to a gloss polish can be achieved. GARANT polishing pens can<br>be profiled using dressing tools. |
| 551920 8X10 | polishing abrasive fine (brown)<br><br>use<br>For fine grinding and polishing of steel, rust- and acid-resistant steel, high-temperature resistant materials and<br>Non-ferrous metals. Polishing grinding pins do not clog even with smearing materials. For matt polishing or attaching<br>optical effects on stainless steel containers, etc. The elastic integration of the abrasive grain results in a very fine polish<br>achieved.<br>Not suitable for edges and rough surfaces.<br>execution<br>Polishing pins with normal corundum (A) in rubber-elastic bond.<br>GARANT polishing pens are characterized by a long service life for quickly achieving a fine, even surface<br>Depending on the version, even fine polishing up to a gloss polish can be achieved. GARANT polishing pens can<br>be profiled using dressing tools. |
| 551922 6x10 | Polishing abrasive grain 280 (green)<br><br>use<br>For fine grinding and polishing of steel, rust- and acid-resistant steel, high-temperature resistant materials and<br>Non-ferrous metals. Polishing grinding pins do not clog even with smearing materials. For matt polishing or attaching<br>optical effects on stainless steel containers, etc. The elastic integration of the abrasive grain results in a very fine polish<br>achieved.<br>Not suitable for edges and rough surfaces.<br>execution<br>Polishing pins with normal corundum (A) in rubber-elastic bond.<br>GARANT polishing pens are characterized by a long service life for quickly achieving a fine, even surface<br>Depending on the version, even fine polishing up to a gloss polish |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | can be achieved. GARANT polishing pens can<br>be profiled using dressing tools. |
| 551922 8X10 | Polishing abrasive grain 280 (green)<br><br>use<br>For fine grinding and polishing of steel, rust- and acid-resistant steel, high-temperature resistant materials and<br>Non-ferrous metals. Polishing grinding pins do not clog even with smearing materials. For matt polishing or attaching<br>optical effects on stainless steel containers, etc. The elastic integration of the abrasive grain results in a very fine polish<br>achieved.<br>Not suitable for edges and rough surfaces.<br>execution<br>Polishing pins with normal corundum (A) in rubber-elastic bond.<br>GARANT polishing pens are characterized by a long service life for quickly achieving a fine, even surface<br>Depending on the version, even fine polishing up to a gloss polish can be achieved. GARANT polishing pens can<br>be profiled using dressing tools. |
| 554971 40X20 | Flap grinder fleece coarse SIC<br><br>use<br>For removing dirt and oxide layers on metals, as well as for matting Cr-Ni and other stainless steels as<br>also of non-ferrous metals.<br>execution<br>Fan-shaped arrangement of the fleece lamellae around the axis of the tool. Shaft diameter 6 mm.<br>The sharp-edged silicon carbide grain (SiC) ensures aggressive grinding behavior and a slightly shiny finish. |
| 554972 40X20 | Flap Sander Fleece Medium SIC<br><br>use<br>For removing dirt and oxide layers on metals, as well as for matting Cr-Ni and other stainless steels as<br>also of non-ferrous metals.<br>execution<br>Fan-shaped arrangement of the fleece lamellae around the axis of the tool. Shaft diameter 6 mm.<br>The sharp-edged silicon carbide grain (SiC) ensures aggressive grinding behavior and a slightly shiny finish. |
| 566486 80 | Fiber disc Cubitron II 987C 125mm<br><br>use<br>On angle grinders with a maximum peripheral speed of 80 m/s with grinding wheels No. 566690 / 566692. The sleek |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | Abrasive grain enables comfortable, ergonomic work with low contact pressure. With the high removal rate<br>3M™ fiber discs are also a real alternative to grinding and flap discs.<br>For processing stainless steel, aluminum, titanium and nickel alloys.<br>execution<br>The precision-shaped high-performance abrasive grain in 3M™ products consists of defined, ceramic triangles that<br>optimally aligned on the grinding base. Greatly increased removal rate with very long service life and<br>uniform surface finish.<br>Extremely tear-resistant, but very flexible vulcanized fiber. Bore 22.23 mm and cross slots.<br>Tip type Cubitron™ II. Highest removal rate.<br>The additional grinding aid ensures a cool grinding without tarnishing and reduces clogging<br>on lubricating materials. |
| 657277 200 | Torque wrench basic unit with scale<br><br>standard<br>Tested according to DIN EN ISO 6789.<br>use<br>For small to medium series.<br>execution<br>Robust, one-arm torque wrench, adjustable via micrometer scale, with safety device against unintentional<br>Adjustment.<br>Basic device with square drive (without insert tool). Suitable insert tools no. 657582 – 657950.<br>Units of measurement: Nm, lbfft.<br>Notice<br>The guaranteed measurement accuracy of the torque only occurs from the calibrated torque range according to DIN EN ISO<br>6789. |
| 657892 2-24 | insert ring spanner<br><br>execution<br>Drop forged; all tools with plug connection = rectangular shaft with spring-loaded retaining pin. This creates a<br>ensures that the insert tools fit firmly and securely in the torque wrench.<br>Notice<br>Please note the pitch of the insert tools and compare them with those of the adjustment tool (see<br>Test report/operating instructions of the torque wrench used). If there is a deviation<br>Make gauge correction! |
| 74-41210017131 | Plastic endless belt for HSF 200 |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | (Replacement item for 74-41520070)<br>replaces 74-41 520 070 |
| 486160 G1.1/4 | Whitworth thread go plug gauge |
| 486160 G1.1/2 | Whitworth thread go plug gauge |
| G00LTIKER 650 XD | |
| 495003 A | |
| Fp940155 Cs/K | |
| 2423527 | |
| 2423550 | |
| 447110 | |
| 552200 (170) | |
| 30 2 110 50 000/0 | |
| A8pa | |
| 2423407 | |
| 453800 150 | |
| Ptdhw482424g | |
| 434920 10 | |
| Mi 2100 | |
| A2-01812 | |
| 12423110 | |
| 630002 46 | |
| Erc4u4843 | |
| Ts120 | |
| Bm 5004 6704740 | |
| Ercfh3u | |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| Star 021/51 | |
| 568732 / 568731 | |
| Pns20810 | |
| 568730 / 568731 | |
| 6513060 | |
| 2423526 | |
| 174025 27x0,9 | |
| Emv-B/4,5 24v | |
| A-10pa | |
| 2423547 | |
| A1412nfss | |
| 20 00040 00040m | |
| 966110 | |
| 552500 (8) | |
| W3900005 | |
| 478100 32 | |
| 090/54 | |
| 2423419 | |
| 12423422 | |
| 12423532 | |
| 6511942 | |
| 432000 10/58 | |
| Type 071/53 | |
| N 5965 | |
| Fp940255 Cs/K | |
| Monty 3300-24 2 | |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| (59381) 491515 175 Holex | |
| 568731 (152x25x25) | |
| 981370 | |
| Bm0015 | |
| Dvu-100/32/0,4 | |
| A6axfn (4593595) | |
| Hk500 | |
| Erc3u4837 | |
| 30210020594135 | |
| 478100 20 | |
| Ercfp4u48 | |
| 079202 7739 | |
| 2423412 | |
| 3021001254105 | |
| 74-41510070 | |
| 2423542 | |
| C-C58sj | |
| Ercfp3u48 | |
| 079710 P2505 | |
| 88-Lsgqr | |
| 12421421 | |
| 66-Lsgqr | |
| 086120-8 /  8 X 50mm | |
| 457100_300 | |
| 39d647/21 | |
| 12423406 | |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| 6510941 | |
| 12423436 | |
| Vml 16 Handtufting | |
| 2423539 | |
| Ercfh4u | |
| 2423548 | |
| 2423533 | |
| 085480 5 | |
| A-Spbg | |
| Diaphragm For M803213c | |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*