
**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

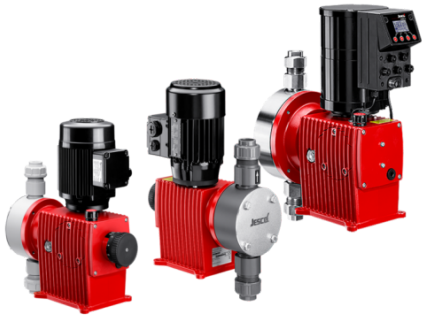

# Lutz-Jesco

Garanti: 12 ay

Bu ürüne ait Türkiye içi kapı teslim fiyat ve teslim süresi içeren teklifimizi almak için **info@yursat.com.tr** e-posta adresine ya da www.yursat.com.tr/iletisim adresindeki iletişim formu üzerinden bizlere ulaşabilirsiniz.

**Lutz-Jesco** Markası, tedarik süresi için lütfen bizimle iletişime geçiniz.

*Firmamız Lutz-Jesco Türkiye Distribütörü veya temsilcisi değildir. Firmamız sipariş durumunda, belirtilen ürünlerde sadece Orjinal ve yeni ürün teklifi sunmaktadır. Bu sitede gösterilen Özel marka adları ve ticari markalar ilgili sahiplerinin mülkiyetindedir, talep durumunda kaldırılmaktadır.*

| Ürün | Açıklama |
|---|---|
| Magdos Lp 2 Pvc/Fpm | 10231003<br><br>0102P0020CC031A2K2KC1ZC1Z00<br>Magnetic diaphragm metering pump<br>Product: MAGDOS<br>Type: LP<br>Delivery rate: 1.9 l / h at 16 bar - 2.3 l / h at 8 bar<br>Capacity adjustment: stroke frequency adjustable 0 - 160 strokes / min<br>Material dosing head and valves: PVC<br>Control unit: 110 - 240 V + 5 / -10%, 50/60 Hz<br>Electrical connection: 1.8 m power cord with plug, Europe (at 230 V AC)<br>Suction valve DN4: double ball ceramic / PVDF / FPM (ball / seat / seal)<br>Pressure valve DN4: double ball ceramic / PVDF / FPM (ball / seat / seal)<br>Suction connection material: PVC<br>Suction connection: Hose clamp connection set 4/6, 6/9 and 6/12<br>Material pressure connection: PVC<br>Pressure connection: hose clamp connection set 4/6, 6/9 and 6/12<br>Dosing head arrangement: floor mounting<br>Option: without<br>Functions<br>Stroke frequency precisely adjustable with the keyboard |
| Magdos Lp 05 Pvc/Fpm | 0102P0005AC031A2K2KC1ZC1Z00<br>Magnetic diaphragm metering pump<br>Product: MAGDOS<br>Type: LP<br>Flow rate: 0.36 l / h at 16 bar - 0.54 l / h at 8 bar<br>Capacity adjustment: stroke frequency adjustable 0 - 120 strokes / min<br>Material dosing head and valves: PVC<br>Control unit: 110 - 240 V + 5 / -10%, 50/60 Hz<br>Electrical connection: 1.8 m power cord with plug, Europe (at 230 V AC) |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | Suction valve DN3: double ball ceramic / PVDF / FPM (ball / seat / seal)<br>Pressure valve DN3: double ball ceramic / PVDF / FPM (ball / seat / seal)<br>Suction connection material: PVC<br>Suction connection: Hose clamp connection set 4/6, 6/9 and 6/12<br>Material pressure connection: PVC<br>Pressure connection: hose clamp connection set 4/6, 6/9 and 6/12<br>Dosing head arrangement: floor mounting<br>Option: without |
| 79113 | Control cable PVC length 2 m<br>with M12x1 coupling, 4-pin, A-coded<br>CONTROL CABLE<br>Use for the following functions<br>possible:<br>- external release<br>- pulse output<br>- Analog input<br>- Pulse input<br>- level monitoring<br>Nominal voltage <= 300 V |
| 79112 | Control cable PVC length 2 m<br>with coupling M12x1 4-pin B-coded<br>CONTROL CABLE<br>Fault signal relay contacts output<br>Nominal voltage <= 300 V |
| P-109 A/Y | 45GCN20AP010-AP020<br>Material: PVDF<br>0,48-13,5m3/h<br>max.1,84g/cm3<br>0,55Kw 2900rpm<br>400V AC 50Hz<br>Komplett mit Rohr und befestigungen |
| P-110 A/Y | 45GCN30AP010-AP020<br>Material: PP<br>0,48-13,5m3/h<br>max.1,84g/cm3<br>0,55Kw 2900rpm<br>400V AC 50Hz<br>Komplett mit Rohr und befestigungen |
| 52897 | Shaft protection sleeve with raceway<br>for mechanical seal Ø35<br><br>Mathcode:: SHAFT PROTECTION SLEEVE<br>Customs tariff number: 84139100<br>Weight: 0.196 kg |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | + 59005 Kleber Weicon VA300 - 12 g |
| 0102D0150BC011A2020C1ZC1Z0 | |
| 0201-502 | |
| 0205-502 | |
| 10221305 | |
| 10231005 | |
| 10241001 | |
| 10241002 | |
| 10241003 | |
| 10241004 | |
| 10241019 | |
| 10407008 | |
| 10417022 | |
| 104L15XXX-151 | |
| 104P10XXX-140 | |
| 10501488 | |
| 12201149 | |
| 12201177 | |
| 12302007 | |
| 12335495 | |
| 12600052 | |
| 12601001 | |
| 12701332 | |
| 12701435 | |
| 12724321 | |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| 13600319 | |
| 13600320 | |
| 18185 | |
| 18186 | |
| 18327 | |
| 18331 | |
| 18353 | |
| 18359 | |
| 20890 | |
| 20891 | |
| 22066 | |
| 23892 | |
| 25087 | |
| 25088 | |
| 25162 | |
| 26845 | |
| 27517 | |
| 28274 | |
| 28300 | |
| 28301 | |
| 28404 | |
| 29312 | |
| 29434 | |
| 29435 | |
| 29746 | |
| 29750 | |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| 29951 | |
| 29995 | |
| 32393 | |
| 32394 | |
| 32980 | |
| 33855 | |
| 33897 | |
| 34506 | |
| 37164 | |
| 38196 | |
| 39121 | |
| 40356 | |
| 40357 | |
| 42387 | |
| 44101002 | |
| 44101004 | |
| 44102011 | |
| 50072 | |
| 50301001 | |
| 50355 | |
| 50580 | |
| 51750 | |
| 52532 | |
| 52533 | |
| 52536 | |
| 52537 | |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| 59005 | |
| 60082 | |
| 60083 | |
| 68052 | |
| 68103 | |
| 68531 | |
| 68706 | |
| 68728 | |
| 68729 | |
| 68772 | |
| 69156 | |
| 69465 | |
| 78509 | |
| 80502 | |
| 80583 | |
| 80584 | |
| 80814 | |
| 81424 | |
| 81463 | |
| 81464 | |
| 81465 | |
| 81627 | |
| 81628 | |
| 81853 | |
| 85099999 | |
| 97120 | |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| LP 10 PVDF/FPM | |
| 34877 | Membrane flange for membrane Ø52 PP/Ms<br>MEMDOS E/DX 4 - 25<br>+<br>83619<br>Cylinder screw M6x20 DIN 912 A2<br>+<br>29462<br>Membrane insert for membrane Ø52 PPO<br>+<br>80816<br>O-ring Ø79x2.5 NBR<br>+<br>34868<br>Diaphragm rod M4 1.4305<br>MEMDOS E/DX - 75<br>+<br>80814<br>Compact seal Ø14/22x5.5<br>94AU925<br>+<br>Wiper Ø14/22x7<br>Type AUASOB Simritan<br>+<br>81464<br>Diaphragm Ø52 EPDM/PTFE-coated<br>Base material 70EPDM281 with fabric insert |
| 83619 | 200121M0602020<br>Cylinder screw M6x20 DIN 912 A2 |
| MEMDOS LA 4 PVC/FPM | Motor diaphragm dosing pump<br>0104A0004CF11A2K2KC1FC1F<br>Product: MEMDOS<br>Type: LA<br>Flow rate: 4 l/h at 50/60 Hz against max. 12 bar<br>Material dosing head and valves: PVC<br>Electric drive: 230 V 1ph 50/60 Hz 0.37 kW with motor 0.18 kW<br>Electrical connection: 1.8 m power cable with plug, Europe (at 230 V AC)<br>Suction valve: DN4 double ball ceramic/PVDF/FPM (ball/seat/seal)<br>Pressure valve: DN4 double ball ceramic/PVDF/FPM (ball/seat/seal)<br>Material suction connection: PVC<br>Suction connection: hose clamp connection 6/12, short<br>Material pressure connection: PVC<br>Pressure connection: hose clamp connection 6/12, short<br>Functions: Stroke frequency can be adjusted from 0 - 100% using a potentiometer<br>Signal LEDs for status, operation and error display |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | Analogue input 0/4 - 20mA<br>Level input with main alarm<br>Release input for external start/stop<br>Hub feedback output<br>alarm relay output<br>Analogue output 0/4 - 20mA<br><br>----<br>A NOTICE:<br>The successor to the MEMDOS DX type, the MEMDOS LP, is currently<br>not available.<br>We offer another alternative here. |
| SDL-2 DN10 PVC L=1100 | Suction Line<br>0122N0010C5U1100BP200K0025S<br>Suction lines<br>Poduct: Suction line<br>Version: Rigid, non-return valve, level control, protection pipe Ø40<br>Nominal width: DN10 (200 l/h)<br>Material: PVC<br>Suction connection: Threaded spigot G3/4 M<br>Suction line length: 1100 mm<br>Gasket material: FPM + EPDM (both added)<br>Level control: PP float<br>Number of switching points: 2<br>Material hose: without suction hose<br>Hose length: -<br>Tank connection: with screwing cap K60x6<br>Special design: without<br>Electrical connection: free cable ends without plug<br>free cable length: approx. 2.5 m<br>Switching function: Contact on rising level<br>Switching voltage: max. < 50 V DC; < 50 V AC<br>Switching current: max. 1 A<br>Switching power: max. 20 VA (protective contact relays at inductive loads) |
| SDL-2 DN10 PVC L=1100 | suction line<br>Match code: 0122N0010C5U1100BP200K0025S<br>suction lines<br>Product: suction line<br>Execution: rigid, non-return valve, level monitoring, protective tube Ø40<br>Nominal width: DN10 (200 l/h)<br>Material: PVC<br>Suction connection: threaded pin G3/4 outside<br>Suction line length: 1100 mm<br>Gasket material: FPM + EPDM (both included)<br>Level monitoring: PP float<br>Number of switching points: 2 |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | Material hose: without suction hose<br>Hose length: -<br>Tank connection: with screw cap K60x6<br>Special version: without<br>Electrical connection: free cable ends without plug<br>free cable length: approx. 2.5 m<br>Switching function: normally open when the level rises<br>Electrical load capacity of the float switch<br>Switching voltage: max. < 50 V DC; < 50VAC<br>Switching current: max. 1 A<br>Switching capacity: max. 20 VA (contact protection relay for inductive loads) |
| 68487 | Shaft set for bearing bracket A1 Ø35<br>1.4305/pc |
| 68531 | GLRD 35 E Mechanical seal Ø35 eMG1/35-G7<br>Q7 Q1 EGG independent of direction of rotation<br>complete with split pin |
| 68177 | Stud bolt set for BN and N pumps<br>for mechanical seal B2D and B2Q E-steel<br>STUD BOLT SET |
| 50357 | Back plate complete for shaft Ø35 PP/1.4305<br>N/BN pumps |
| 68485 | Bearing cap set for bearing bracket A1 N 32/40/50-200, N 50-160 |
| 68484 | Bearing carrier housing set A1 |
| 68059 | O-Ring-Satz N/BN 50-160,50-200 EPDM |
| 69000 | Suction nozzle DN80 PP/EPDM<br>N/BN 50-160 |
| 50289 | Impeller cap LH for shaft Ø35 PP/Ms58 |
| 50211 | Spiral casing for N/BN 50-160 PP |
| 12532008 | Pressure holding/overflow valve DN15 PN10<br>G1/2-G1/2 1.4571/PTFE Q=500 l/h<br>Customs position: 84811019, country/region of origin: DE<br>Net weight: 1.53 kg<br>MATCH CODE 0125D0015SD0010S5ES5E00000A<br>Product: Pressure holding and overflow valve<br>Type: spring loaded<br>Nominal diameter: DN15<br>Nominal flow rate: 500 l/h at uniform flow (DN15)<br>Housing material: stainless steel<br>Membrane material: EPDM-PTFE coated |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | Material seals: without<br>Nominal pressure: PN10<br>Material connection input: stainless steel<br>Connection input: threaded connection G1/2 inside<br>Material connection output: stainless steel<br>Connection output: threaded connection G1/2 inside<br>Additional equipment/special design: without<br>Preset blow-off pressure: without<br>Adjustment range: 0.5 - 10 bar |
| 81656 | Diaphragm Ø45.5-0.5 x3.2+/-0.3<br>EPDM-PTFE coated<br>PTFE coated on one side, approx. 0.5 thick |
| 12532006 | Pressure holding/overflow valve DN15 PN10<br>G1/2-G1/2 PVC/PTFE Q=500 l/h<br>MATCH CODE 0125D0015CD0010C5EC5E00000A<br>Product: Pressure holding and overflow valve<br>Type: spring loaded<br>Nominal diameter: DN15<br>Nominal flow rate: 500 l/h at uniform flow (DN15)<br>Housing material: PVC<br>Membrane material: EPDM-PTFE coated<br>Material seals: without<br>Nominal pressure: PN10<br>Material connection input: PVC<br>Connection input: threaded connection G1/2 inside<br>Material connection output: PVC<br>Connection output: threaded connection G1/2 inside<br>Additional equipment/special design: without<br>Preset blow-off pressure: without<br>Adjustment range: 0.5 - 10 bar |
| 81656- | Membrane Ø45.5-0.5 x3.2+/-0.3<br>EPDM-PTFE coated<br>Customs position: 40169300, country/region of origin: DE<br>Net weight: 0.006 kg<br>PTFE coated on one side, approx. 0.5 thick |
| DIAPHRAGM / PRESSURE RELIEF VALVE / DN15 / EPDM-PTFE | |
| S-41.813/7818 | |
| 21.821-40 | Pos3 |
| 0205-201 | Pump set barrel emptying 19%<br>concentrated acids and alkalis<br>Universal motor MA II 5 / 575 W, 230 V AC/50 Hz,<br>without undervoltage release, protection class IP 54, |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | with 5 m connection cable and Schuko plug.<br>Pump tube made of polyvinylidene fluoride (PVDF)<br>Type PVDF 41 - L - DL, nominal size: 1000 mm,<br>sealless and conditionally dry-run safe,<br>Drive shaft made of Hastelloy C - 4 (2.4610)<br>Special chemical hose DN 19 (3/4"),<br>complete with hose connections and hose<br>clamps pre-assembled.<br>Fuel nozzle made of polyvinylidene fluoride (PVDF)<br>with rotating hose connection<br>Viton seal.<br>PP barrel adapter |
| 0030-001 | Motor MI 4 - E / 500W<br>230V AC/50 Hz<br>Customs code: 85012000, Country/region of origin: CH<br>Net weight: 2.905 kg<br>Universal motor with speed controller<br>Power consumption 500 W, 230 V, 50 Hz,<br>with double protective insulation, two-pole<br>Single-pole thermal on/off switch<br>Overcurrent release, protection class IP 24<br>with 5 m connection cable and plug |
| 0374-482 | Special PTFE chemical hose<br>DN 25 (1")<br>Customs position: 40094100, country/region of origin: DE<br>Net weight: 0.775 kg<br>suitable for chemical and mineral oil products<br>as well as almost all solvents for<br>Food and beverages, drinking water, etc.<br>Inner layer made of black, smooth, seamless PTFE<br>non-leaching and non-staining<br>(meets FDA and USP Class VI requirements)<br>Outer rubber made of EPDM<br>electrically conductive, OHM hose according to EN12115.<br>Operating pressure: max. 16 bar<br>Temperature range: -30 to +150 °C<br>(depending on the medium) |
| 0122-205 | PVDF 41-L-DL pumping station<br>Nominal size: 1000 mm<br>Customs position: 84137081, country/region of origin: DE<br>Net weight: 1.79 kg<br>Sealless and conditionally dry-running safe<br>Pumping station made of PVDF (natural)<br>Wheel made of ETFE<br>Drive shaft: Hastelloy C - 4 (2.4610)<br>Immersion tube diameter: 41 mm<br>Pressure port: External thread G 1 1/4 |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| 0204-422 | Hose connection PVDF DN 25 (1") |
| 0300-445 | Stepless ear clamp |
| 0204-550 | Attach hose, "non-explosive" on both sides |
| 0204-390 | PVDF/FPM dispensing nozzle<br>G 1 1/4 AG<br>Customs position: 84818081, country/region of origin: DE<br>Net weight: 0.375 kg<br>Housing and valve tappet made of PVDF<br>Protective bar made of PPN, seal made of FPM (Viton)<br>Operating pressure: max. 3 bar<br>Viscosity: max 760 mPas<br>Flow rate: max 50 l/min (water)<br>Maximum fluid temperature: 80°C<br>Connection: External thread G 1 1/4 |
| 11-211-55-05A | BAYONET GEAR-LUTZ-- |
| TR90-PP Flowmeter | |
| PP-SL 32 | 19 ınch PP |
| PP-SL 32- | 39 ınch PP |
| 6060-119 | Horizontal centrifugal pump with magnetic coupling<br>TMR-16.15-S-WR-E-R1-BEN-3 |
| 6060-021 | Horizontal centrifugal pump with magnetic coupling<br>TMR-16.20-P-WR-V-R1-BEN-3 |
| 34174 | |
| 10499357 /Memdos E160 Pvc | |
| 35043 | |
| Magdos Dx 2 Obsolete, Replaced By Magdos Lp 2 Pvc/Fpm | |
| Magdos Lt 6 230v Pvdf 10208322 | |
| 28400 | |
| Adjustment Knob Memdos E/Dx 160...380 | |
| 99393 | |
| 10241147 | |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| Fedos E-8 | |
| Magdos Ld 4 Pvc/Ss/Fpm | |
| 79407 | |
| 39911 | |
| Magdos Lb 4 Pvc/Fpm(10211005) | |
| Magdos Dx 40 Pvc | |
| 21469 | |
| 10208381 - Obsolete , Replaced By Magdos Ld 4 Pvc/Ss/Fpm | |
| Minidos A 24 (10301005) | |
| 91195 | |
| 814080-1 | |
| 80815 | |
| Exproof Panel For Memdos Lb | |
| Accessory Kit For Magdos Pvc/Fpm | |
| 34173 | |
| 10407624 | |
| Magdos Lt 06 230v Pvdf (Dn3) 10208333 Matchcode: 0102l0006v001a33v1bv1b4 | |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*