


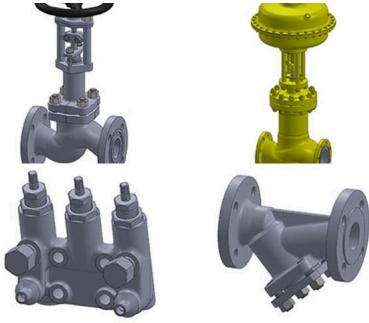

Phönix Armaturen-Werke

Garanti: 12 ay

Bu ürüne ait Türkiye içi kapı teslim fiyat ve teslim süresi içeren teklifimizi almak için info@yursat.com.tr e-posta adresine başvuru yapabilir ya da ayrıntılı bilgi için +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaşabilirsiniz.

Phönix Armaturen-Werke Markası, tedarik süresi için lütfen bizimle iletişime geçiniz.

Firmamız Phönix Armaturen-Werke Türkiye Distribütörü veya temsilcisi değildir. Firmamız sipariş durumunda, belirtilen ürünlerde sadece Orjinal ve yeni ürün teklifi sunmaktadır. Bu sitede gösterilen Özel marka adları ve ticari markalar ilgili sahiplerinin mülkiyetindedir, talep durumunda kaldırılmaktadır.

Ürün	Açıklama
Shut-off valve with manual actuation DN40 PN40	with chambered bellows and safety stuffing box designed for up to 50,000 actuations at nominal pressure and room temperature straight seat design (with long neck) according to attached catalog sheet 350 C (PN ≤ 40) Materials: Housing and cover made of 1.0460 or 1.0619 Housing sealing surface made of 1.4370 lower spindle made of 1.4571 Stuffing box gland made from 1.0460 or 1.0619 Cone made of 1.4021 hardened (up to DN100) or 1.0460 with sealing surface made of 1.4009 1.4571 bellows Stud bolts and nuts made from 1.7709 / 1.7218 Graphite stuffing box packing Lid seal made of comb profile stainless steel with graphite coating on both sides Connections: Butt weld ends according to DIN EN 12627 Overall length: according to DIN EN 12982
Shut-off valve with manual actuation DN25 PN40	with chambered bellows and safety stuffing box designed for up to 50,000 actuations at nominal pressure and room temperature straight seat design (with long neck) according to attached catalog sheet 350 C (PN ≤ 40) Materials: Housing and cover made of 1.0460 or 1.0619 Housing sealing surface made of 1.4370 lower spindle made of 1.4571 Stuffing box gland made from 1.0460 or 1.0619 Cone made of 1.4021 hardened (up to DN100)

Ürün	Açıklama
	or 1.0460 with sealing surface made of 1.4009 1.4571 bellows Stud bolts and nuts made from 1.7709 / 1.7218 Graphite stuffing box packing Lid seal made of comb profile stainless steel with graphite coating on both sides Connections: Butt weld ends according to DIN EN 12627 Overall length: according to DIN EN 12982
VALVE DN40 PN40 WELDED WITH METAL BELLOWS	ARBEITSTEMPERATUR MUSS 320 °C betragen. DIE DICHUNGSELEMENTE SIND GRAPHIT.
VALVE DN25 PN40 WELDED WITH METAL BELLOWS	ARBEITSTEMPERATUR MUSS 320 °C betragen. DIE DICHUNGSELEMENTE SIND GRAPHIT.
RÜCKSCHLAGVENTIL GESCHWEISST DN15 PN40	
according to enclosed data sheet 350 C (PN ≤ 40)	Typ: 350 DN15-PN40 Materials: Housing and cover made of 1.0460 or 1.0619 Housing sealing surface made of 1.4370 lower spindle made of 1.4571 Gland gland made of 1.0460 or 1.0619 Hardened cone made of 1.4021 Bellows made of 1.4571 Studs and nuts made of 1.7709 / 1.7218 Stuffing box packing made of graphite Lid seal made of comb profile stainless steel with graphite coating on both sides Connections: Raised face flanges Form B1 according to DIN EN 1092-1 Length: according to DIN EN 558, row 1 FTF
DN 15 PN 40	
DN 25 PN 40	