


Proxitron

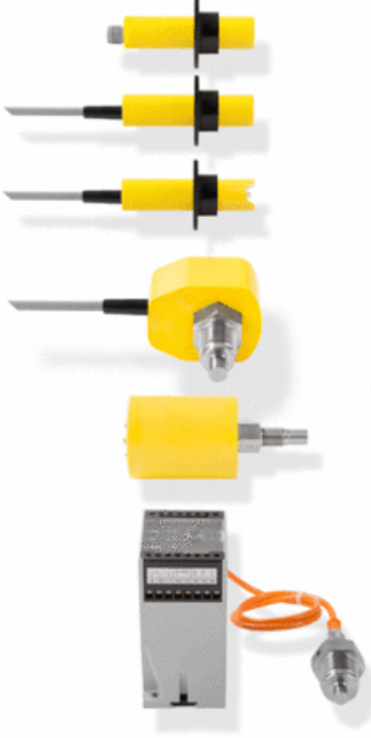

Garanti: 12 ay

Bu rne ait Trkiye ii kapı teslim fiyat ve teslim sresi ieren teklifimizi almak iin info@yursat.com.tr e-posta adresine başvuru yapabilir ya da ayrıntılı bilgi iin +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaŐabilirsiniz.

Proxitron Markası, tedarik sresi iin ltfen bizimle iletiŐime geiniz.

Firmamız Proxitron Trkiye Distribtr veya temsilcisi deŐildir. Firmamız sipariŐ durumunda, belirtilen rnlerde sadece Orjinal ve yeni rn teklifi sunmaktadır. Bu sitede gsterilen zel marka adları ve ticari markalar ilgili sahiplerinin mlkiyetindedir, talep durumunda kaldırılmaktadır.

rn	Aıklama
2319D-15	IKL 015.33 GH Inductive proximity switch, Sn = 15mm not flush. 10-55 VDC, 3-wire PNP normally open contact, short-circuit proof. -20 to + 100 ° C. Plastic housing M30x1.5, with 15m silicone cable. Stat. Item no .: 85365019 Country of origin: Germany
9812A	HH6 Mounting clamp for proximity switches M30 Plastic PP, up to +90 °C
IKK 060.38 G	Inductive proximity switch 2046D-3 Sn = 60mm nb, Poti, 10-55 VDC, PNP normally open + normally closed, short-circuit proof, 3 m cable, housing PBT 80x80x40 mm
IKK 060.38 G	Inductive proximity switch 2046D-5 Sn = 60mm nb, potentiometer, 10-55 VDC, PNP normally open + normally closed, short-circuit proof, 5 m cable, housing PBT 80x80x40 mm
IKU 031.ETR.28 G S4	2451AETR Inductive sensor bar Sn = 30mm non-flush, 10-30 V DC, PNP NO + NC short-circuit proof, Plastic housing 300 x 35 x 35mm, M5 threaded bolt V2A, Connector S4 (M12x1) Stat. Item no .: 85365019 Country of origin: Germany
2002G-20	

2029T	
2065W	
2092G	
2272I	
2324B	
2324B+9850F	
2330A	
2374G IKZ 302.23 GH (175°C)	
2376E	
2413B-15	
2450D	
2490C	
5116A	
6036L	
6048A	
6302B	
6425E	
6436I	
6920W + 9847B	
7602A	
9816D	
9828R	
9829B	
9842J	ST 043/3-10PURH S4 straight coupling with 10 m molded PUR cable 3-pin up to +90 °C, 1=br, 3=bl, 4=sw/bk
9861F	
FKE 604.18 G 8382AT	
FKEN 604.18 GS4	
IKL 015.33 GH 2319D-20	
IKL 015.38 GH	
IKZ 301 28GH	

IKZ 307.28 GH	
IKZ 475.33 GS4F.	
KKH 020.04 G	
LLK4	
LTZ 183.28 G S4	
MKZ 120.59 (2159M)	
OKA 704.05 G	
OKS 2 GA13.14 S9 6920D 350 - 1800°C	
OKS 2 GA18.14 S9 6920F 350 - 1800°C	
PROXITRON FKM 130.53	
2451AETR	IKU 031.ETR.28 G S4 Inductive sensor bar Sn= 30mm not flush, 10-30 V DC, PNP NO+NC short-circuit proof, Plastic housing 300 x 35 x 35mm, M5 threaded bolt V2A, Connector S4 (M12x1)
IKU 031.28 GS4 2451A	IKU 031.28 GS4 Inductive sensor bar Sn= 30mm not flush, 10-30 V DC, PNP NO+NC short-circuit proof, Plastic housing 300 x 35 x 35mm, M5 threaded bolt V2A, Connector S4 (M12x1)
IKU 031.ETR.28 G S4 2451AETR	Inductive sensor bar Sn= 30mm not flush, 10-30 V DC, PNP NO+NC short-circuit proof, Plastic housing 300 x 35 x 35mm, M5 threaded bolt V2A, Connector S4 (M12x1)
IKZ 301.28 GH3	2469I Inductive proximity switch
2451A	IKU 031.28 GS4 Inductive sensor bar Sn= 30mm not flush, 10-30 V DC, PNP NO+NC short-circuit proof, Plastic housing 300 x 35 x 35mm, M5 threaded bolt V2A, Connector S4 (M12x1) Stat. Goods number: 85365019 Country of origin: Germany
PROXIMITY SW IKL 015.38 G S4	
IKL 015.38 GSA1	
2451A	IKU 031.28 GS4 Inductive sensor bar Sn = 30mm not flush, 10-30 V DC, PNP closure+opener short-circuit, Plastic housing 300 x 35 x 35mm, M5 threaded bolt V2A, Plug S4 (M12x1)
IKU 031.28 GS4	2451A Inductive sensor bar Sn= 30mm not flush, 10-30 V DC, PNP NO+NC short-circuit proof, Plastic housing 300 x 35 x 35mm, M5 threaded bolt V2A, Connector S4 (M12x1)
ST 041/4-5	9841E Angle coupling S4 (M12 A) with 5 m addressed. 4-pin cable 1=br 2=ws/wh 3=bl 4=sw/bk
IKU 031.28 GS 4 2451A.	

OKS 4 GA13.14 S9	6920E Piros S infrared sensor / pyrometer measuring spot at a distance of 4000 mm = 40 mm, for metal applications, t=250-1300°C = 4-20 mA analogue, 24 VDC, LED pilot light, USB interface, Stainless steel housing M40 length 113 mm, connector S9
9847B	ST S9/5-2 Coupling S9 with 2 m molded PUR cable 5-pin, 1=ws, 2=br, 3=ge/gr, 4=bl, 5=gn, suitable for pyrometer series OKS
6913B	DAK 302 cooling jacket for optical sensors with M40 housing (OKS/OXS), Stainless steel, water cooling, up to 200 °C, incl. blow attachment
6913E	DAK 305 Mounting angle adjustable for optical sensors with M40 housing (OKS/OXS)
IKU 031.28 GS4	2451A Inductive sensor bar Sn= 30mm not flush, 10-30 V DC, PNP NO+NC short-circuit proof, Plastic housing 300 x 35 x 35mm, M5 threaded bolt V2A, Connector S4 (M12x1)
IKU 031.28 G S4	Inductive Proximity Switch
IKU 031.28 GS 4 2451A.	
2393E	IKU 8101.38 G S4 Inductive surface sensor Sn 240 mm not flush (100 mm on object 200 x 140 mm), 10 - 55 V DC, PNP normally open + normally closed, short circuit proof, Surface design 140 x 1000/1080 mm, plug S4 (M12 x1)
2413W-15	IKL 020.33 GH1 Inductive proximity switch Sn = 20 mm not flush. 10 - 55 V DC, PNP make contact, short circuit proof, Plastic housing M30, 15 m silicone cable, up to +120 °C
IKU031.28 GS4 2451A	
IKL015.33GH+HH6	
2451A	IKU 031.28 G S4 Inductive sensor strip Sn= 30mm not flush, 10-30 V DC, PNP NO+NC short-circuit proof, Plastic housing 300 x 35 x 35mm, M5 threaded bolt V2A, Connector S4 (M12x1)
2021K	IKM 070T.38 G S4 Inductive proximity switch Sn=70 mm nb, 10-55 VDC, PNP NO+NC, short circuit proof, Plastic housing Ø95, central fastening with plastic screw, including cover for assembly opening, finishing with teach-in, Connector S4 (M12x1), 1=+, 3=-, 2=Ö, 4=S
IKK 060T.038.GS4	
2319L-5	IKLT 015.38 GH Inductive proximity switch, Sn=15mm non-flush. 10-55 VDC, 4-wire PNP normally open + normally closed, short-circuit proof. -25 to +100°C. Teflon PTFE housing M32x1.5, with 5 m Teflon cable.
2331H-	MKK 050.194 S4 SA1 (-pol.) Inductive analog sensor Measuring range 0-50 mm = 4-20 mA, non-flush, 24 VDC, up to 95 °C, Plastic housing 80x80x40 mm, connector S4 (M12), 1=+, 3=-, 4=4-20 mA (against -), without button on the

	sensor
2319D-15	IKL 015.33 GH Inductive proximity switch, Sn=15mm, not flush. 10-55 VDC, 3-wire PNP normally open contact, short-circuit proof. -20 to +100°C. Plastic housing M30x1.5, with 15m silicone cable
HH6/9812A	Mounting clamp for sensors with M30 housing
MKK 050.194 S4 SA1	2331H inductive analog sensor Measuring range 0-50 mm = 4-20 mA, non-flush, 24 VDC, up to 95 °C, Plastic housing 80x80x40 mm, connector S4 (M12), 1=+, 3=-, 4=4-20 mA (against -), without button on the sensor
IKK060.ETR.38GS4	
2319D-10	IKL 015.33 GH Inductive proximity switch, Sn=15mm, not flush. 10-55 VDC, 3-wire PNP normally open contact, short-circuit proof. -20 to +100°C. Plastic housing M30x1.5, with 10m silicone cable.
9844x	
Ikq 015.38 G Uniprox	
5037a	
Ikn 070.05 G 2 M Kabel	
Laa2011d-50040	
2374g Ikz 302.23 Gh (175;C)	
Ikl015.33ghs4	
2451f Iku 031t.28 Gs4 (Teach)	
Ikz 472.05 Mg	
2065u Ikq 100t.38 Gs4 (Teach)	
2374x-5	
Ikl 015.33 Ghs4	
5027b	
6008-2rs1	
Lsd201.13gv+llk4	
Okb20405gs5-6410e+9844a	
8381bt	
Mkc 200. 190s4	
5038a	
Proxitron Fkm 130.53	

8032b	
Ega-57	
Idl 015.05 G Art-Nr 2474a Induktiver Drehzahlw¼;Chter	
Fkf 604.18 Gs4	
Zsu A01.82	
Iku 031.28 Gs4 2451a	IKU 031.28 GS4 Induktive Sensorleiste
2102d Iku 2101.33 G	
Ikl015.33gh (23119d-15)	
Oht 1800g/ps 0-500	
Ikm 070.33 G	
St 043/3-10purh (9842j)	S4 straight coupling with 10 m molded PUR cable 3-pin up to +90 °C, 1=br, 3=bl, 4=sw/bk
Sts5-Dc5	
2451a Iku 031.28 Gs4	
I kz 122.05 G	
Ikn 070.05g/2052	
5037j	
Ikl015.38 G Sa1 Pur	
Ikv 025.23 Gz S4	
290 Mm Oks 2 Ga13.14 S9 6920d 250 - 1300 ;C	
2032e	
Iku 031.28 Gs4	2451A Inductive sensor bar Sn = 30mm not flush, 10-30 V DC, PNP NO + NC short-circuit proof, Plastic housing 300 x 35 x 35mm, M5 threaded bolt V2A, Connector S4 (M12x1) Stat. Lot no: 85365019 Country of origin: Germany
5200a	
6206a	
St 043/3-10h	
I kz 475.33 Gs4	
2049w-5 Ikn 070t.38 G	
2052n	

Ikz 474.05 G	
Iku 031.28 Gs4 (2451a)	IKU 031.28 GS4 Inductive sensor bar Sn = 30mm not flush, 10-30 V DC, PNP NO + NC short-circuit proof, Plastic housing 300 x 35 x 35mm, M5 threaded bolt V2A, Connector S4 (M12x1) Stat. Lot no: 85365019 Country of origin: Germany
Okb 2069.53 Gl	
5002g	
Iku 131t.38g	
2319d-5	
Ikoa 140.05g	
IkI01533gh2319d-15	
St S5-Dc/4-5	
9841q	
3b27	
Ikz 475.33 Gs4f	
2052n-5 Ikn 070.05 G	
Ikz 302.28 H	
2319q-5	
Mkz 471.19 S4	
9828a	
Mkk 050.194 S4	
Iku341.38	
Oaa 703	
Ikq100.38gs4	
5038e	
Ikz302.23gh	
2105a	
Ikz 807.23 Gh 2491b	
Iku 825t.38 G S4	
9847b	
2331h	
St 041/4-2	9841D Angle coupling S4 (M12) with 2m Cable 4-pin. 1 = br 2 = ws / wh 3 = bl 4 = sw / bk Stat. Product number:

85444290 Country of origin: European Union

[2021d](#)

[2469b-5](#)

[2422h](#)

[Iku 251.33 G](#)

[2060d](#)

[9828c](#)

[Llk 4](#)

[Ikz 301.04 G](#)

[Iku 008.28 Gs4](#)

[Osa 6747.13 Gs5](#)

[5037c](#)

[Iku 341t.38 Gs4](#)

[6410a](#)

[8043b](#)

[Ikk 050.31 G](#)

[Ikud 031.28 G S4](#)

[Okb 206.31 GIk](#)

[2193b \(Iku 341t.38 Gs4\)](#)

[9850r](#)

[Okb2069.53gl](#)

[2159m Mkz 120.59](#)

[Oht 500glp](#)

[Ikn070.38gh Nr. 2052s-5](#)

[8008a-5](#)

[130.13 G\(Pnp\), 800a](#)

[2409f](#)

[50040](#)

[9850p](#)

[Oka 7029.38 G S4](#)

Gs4 2451a
Ikz182.23gh
Ikn 070.05g
Ikl 025.33 Ghs4
Mkz 120.59 (2159m)
2301c-20
Ikq015.38g
Ikl01533 Ghart.Nr : 2319d-10ön / 10metre
8032b / Fkm 230.13 Gs4
8008a
Type Llk 2
060.38 G 4
Ikn 070.05g/2052n
9842j (St 043/3-10purh)
8008a Fkm 130.13 G
8041a Fkm 230.18 Gs4
Proxitron-9848a-HI-1-2-St3;Ck-Rö;Ndelmuttern-M-30-X-15-Mm-Sw36-8mm-Dick-Kunststoff-Pa-Stat-Warennr-85444290-Istanbul-Turkiye
Oks 2 Ga13.14 S9 6920d 250 - 1300;C
Ikq 015.05
Fkm 230-13 Gs4
Fkf 604.18 G, 8381at
Oks 2 Ga18.14 S9 6920f 350 - 1800;C
Ikn 070t.38 Gn S4 2050c
Oks 4s18.14 S9
9828h
Ikl015.38 G Sa1
Ol19
2049q
Iklt 015.38

Ikz 307.28 Gh (230°C)	Inductive proximity switch Sn = 15mm not flush, 10-30 VDC, PNP normally open + normally closed consisting of: Sensor M30x85mm with 2m PTFE cable + 230 ° C and switching amplifier M12x62mm with 2m PUR cable + 70 ° C. Sensor and switching amplifier are firmly connected. Stat. Lot no: 85365019 Country of origin: Germany
6913g	
9841r	
Ikk 050.38 Gs4	
Fkm 230.13 G	
2451f Iku 031t.28 Gs4	
Oka704.38g	
2452a	
031 28 Gs42451a Ind¼ktif Sens¼r	
St041/4-5	
Ltz 183.28 Gs4	
Fkm 130.13 Sp 80;C	
Fkm 230.13 Gs4	FKM 230.13 GS4 Air flow monitor M2 compact 3 m / s, 24 VDC, PNP closer, short-circuit proof, Plastic housing with mounting flange, connector S4, Stat. Lot no: 85365019 Country of origin: Germany
?12 - 466100 Kug4-M12 10m-Pur	
IkI015.33gh	
Gs4 2409e	
9841t	
IkI015.33gh 2319d-20	
2451a	
8381at	
Fkm 230.13 8028a	
Laa2011dvp8805	
2465a-15	
10107740	
8041a	
Ikh 020.31 G	

2229h-5	
Fkm 130.13 G (8008a-5)	
Llk4-6436i	
Ikz 301.23 Gh 175 E	
Ikz 475.38 Gv 2409b	
St041/4-5h	
?12 - 466050 Kug4-M12 5m-Pur	
9861b	
Iku 261t.38g	
Ikoh.100.05.G	
Mkk 050.194 S4 Sa1 (2331h)	
6913i	
Iku- 031.28.Gs4 Sens¼r	
2409e	
R5t285l383-003(1/4)-00-8hn34	
St 041/4-2 (9841d)	
2409g	
Iku 251t.38g	
2490a Iku 015t.28 Gs4	
2052q-5	
Ipoh150.38 Gs4	
Fke 604.18 Gs4 8382bt	
2377c-5 Ikl 015.05 Gh	
Type: Ikn 070t.38 Gs4 (Art. Nr.2049?)	
2319D-15	IKL 015.33 GH Inductive proximity switch, Sn=15mm not flush. 10-55 VDC, 3-wire PNP normally open, short-circuit proof. -20 to +100°C. Plastic housing M30x1.5, with 15m silicone cable.
Ikk 050.05 Ghs14 2044r	
Ikl01533gh2319d10	
2495b Ikvs 025.23 Gs4	
2044m	

2319e
Ikz 122.04 G
2491b
?12 - 490017 Stgk-M12 4pol Sk
Ikz301.23 Gh 175e
Ikn 070t.38 Gs4 (2049t)
Et-57
Ikz 307.23 Gh
Hm2
Ikm07038gs4
Art.Nr. 8381at
Ikz 302.05 G
Ikv 045.23 Gz S4
Oac 204
Type: Llk 2 (Art. Nr. 6436f)
6147a
2409f Gs4f
Ikn 070.05 G 5 M Kabel
Kkn070.38.Gs4
Okb206.31gIk
Ikk 060.38 Gs4
Iku 842.38 Mgd
Ikl 015.33 Gh Mit 10m Silikonkabel
Oks 7 Tf 13.14 S9 Pyrometer
2319d-20
Ikz304.23gs4 Plug:S4(M12x1)
Ikl 015.33 Gh(2319d-10)
2446h Iku 021t.28 Gs4
Ikz 474.05 Gd
Mkk 050.190 S4

Fkm 130.13 Sp
Ikm 070t.38 Gs4
Kkh 020.04 G
Ikl015.33gh 2319d-15
9841d (St 041/4-2)
Ikn 070.38 G
I kz 302.04 G
2376e Ikl 015.04 Gh
Fkm 231.13 G S4
2451f
2001t
Oks 7 T10.14 S9
Fkm 130.13 G
Iku 341 Sn 80
Fkm 231.13 G
I515.95 Vh
Ikh 020.05
8023a
9816b Hm 2
Oks 2 Ga13.14 S9 6920d 350 - 1800;C
Fkm 130.10 G
2m Anschlussbuchse Oder Kabel
9816b
2422e