
Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

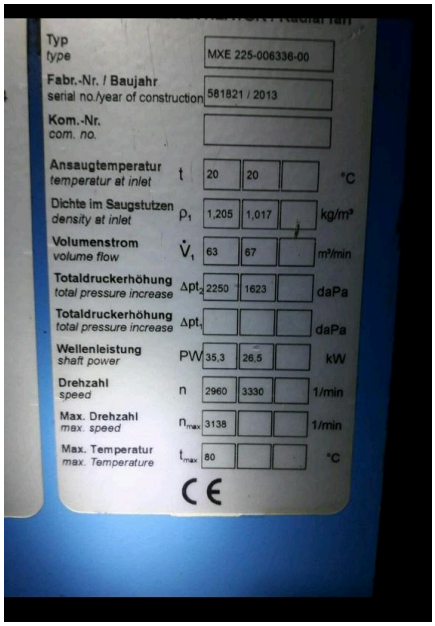

Reitz

Garanti: 12 ay

Bu ürüne ait Türkiye içi kapı teslim fiyat ve teslim süresi içeren teklifimizi almak için **info@yursat.com.tr** e-posta adresine ya da www.yursat.com.tr/iletisim adresindeki iletişim formu üzerinden bizlere ulaşabilirsiniz.

Reitz Markası, tedarik süresi için lütfen bizimle iletişime geçiniz.

Firmamız Reitz Türkiye Distribütörü veya temsilcisi değildir. Firmamız sipariş durumunda, belirtilen ürünlerde sadece Orjinal ve yeni ürün teklifi sunmaktadır. Bu sitede gösterilen Özel marka adları ve ticari markalar ilgili sahiplerinin mülkiyetindedir, talep durumunda kaldırılmaktadır.

Ürün	Açıklama
17.9.00019.00001 NR.340432 NW250	
Pressurizer KPK302-063050	RWN0038-00 KPK302-063050 RWN0038-00
MXE063-000830-00	Centrifugal fan without motor, impeller mounted on motor shaft, Engine arranged on console stand. Technical specifications according to the data sheet and current dimension sheet (if necessary, please request). Direction of rotation: GR360. + 1.04 DMB152-03-023-31 1 pc. Low-voltage three-phase squirrel-cage motor, 2920 1/min, 3 kW, 400VD, 50 Hz, IMB3, IE3, IP55, 3 PTC thermistors, Made by Lammers 1.06 MAU000-000100-00 1 pc. engine mounting costs 1.08 IOG301-006000-03 1 pc. Inspection opening, material: 1.0038, size: 60x150 mm. Arrangement at 45°. 1.10 KAG100-100000-05 1 pc. Condensate drain connection 1" plug 1.12 OFQ201-100000-00 1 pc. Prime coat RAL 7040 Derogrund Hydro XT, 40 µm. Impeller max. layer thickness of 40µm Housing surfaces: inside (40µm) & outside (40µm) Console surfaces: outside (40µm) Impeller surfaces: 40µm 1.14 OFQ203-000000-01 1 pc. Top coat RAL 5005 2K Derocryl 70 ST, 40 µm. Should you If you would like a different RAL colour, please let us know when ordering.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	Housing surfaces: outside (40µm) Console surfaces: outside (40µm) Motor surfaces 40µm 1.16 SPZ423-050045-06 4 pcs. Anti-vibration buffer with mounting plate (on the fan), Shore A55, D=50, overall height=54mm. Material: 1.0226 1.18 KPK203-000014-02 1 pc. Compensator, round with backing flange (steel parts). polyester, installation length 150 mm, DN 140, temperature-resistant up to 90°C, pressure-resistant up to max. +/- 2500 daPa. Perforation according to: DIN 24154 R2 1.20 LEK003-000014-06 1 pc. Guide plate DN 140 made of material 1.0226, bores according to DIN 24154 R2. 1.22 KPK302-010012-02 1 pc. Compensator, angular with backing flange (steel parts). polyester, installation length 150 mm, AN 100 x BN 125, temperature-resistant up to 90°C, pressure-resistant up to max. +/- 2500 daPa. Perforation according to: DIN 24193 R3 1.24 LEK002-010012-06 1 pc. Guide plate AN/BN 100 / 125 made of material 1.0226, bores according to DIN 24193 R3.
MXE063-001230-00	Centrifugal fan without motor, impeller mounted on motor shaft, Engine arranged on console stand. Technical specifications according to the data sheet and current dimension sheet (if necessary, please request). Direction of rotation: GR360. + 2.04 DMB152-04-023-31 1 pc. Low-voltage three-phase squirrel-cage motor, 2950 1/min, 4 kW, 400VD, 50 Hz, IMB3, IE3, IP55, 3 PTC thermistors, Made by Lammers. 2.06 MAU000-000112-00 1 piece engine mounting costs 2.08 IOG301-006000-03 1 pc. Inspection opening, material: 1.0038, size: 60x150 mm. Arrangement at 45°. 2.10 KAG100-100000-05 1 piece Condensate drain connection 1" plug 2.12 OFQ201-100000-00 1 pc. Prime coat RAL 7040 Derogrund Hydro XT, 40 µm. Impeller max. layer thickness of 40µm Housing surfaces: inside (40µm) & outside (40µm) Console surfaces: outside (40µm) Impeller surfaces: 40µm

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	2.14 OFQ203-000000-01 1 pc. Top coat RAL 5005 2K Derocryl 70 ST, 40 µm. Should you If you would like a different RAL colour, please let us know when ordering. Housing surfaces: outside (40µm) Console surfaces: outside (40µm) Motor surfaces 40µm 2.16 SPZ423-050045-06 4 pcs. Anti-vibration buffer with mounting plate (on the fan), Shore A55, D=50, overall height=54mm. Material: 1.0226 2.18 KPK203-000016-02 1 piece Compensator, round with backing flange (steel parts). polyester, installation length 150 mm, DN 160, temperature-resistant up to 90°C, pressure-resistant up to max. +/- 2500 daPa. Perforation according to: DIN 24154 R2 2.20 LEK003-000016-06 1 pc. Guide plate DN 160 made of material 1.0226, bores according to DIN 24154 R2. 2.22 KPK302-010012-02 1 piece Compensator, angular with backing flange (steel parts). polyester, installation length 150 mm, AN 100 x BN 125, temperature-resistant up to 90°C, pressure-resistant up to max. +/- 2500 daPa. Perforation according to: DIN 24193 R3 2.24 LEK002-010012-06 1 pc. Guide plate AN/BN 100 / 125 made of material 1.0226, bores according to DIN 24193 R3.
MXE063-002030-00	Centrifugal fan without motor, impeller mounted on motor shaft, Engine arranged on console stand. Technical specifications according to the data sheet and current dimension sheet (if necessary, please request). Direction of rotation: GR360. + 3.04 DMB150-000000-00 1 pc. Low-voltage three-phase squirrel-cage motor, 2950 1/min, 5.5 kW, 440VD, 50 Hz, IMB3, IE3, IP55, 3 PTC thermistors, Made by Lammers. 3.06 MAU000-000132-00 1 pc. engine mounting costs 3.08 IOG301-006000-03 1 pc. Inspection opening, material: 1.0038, size: 60x150 mm. Arrangement at 45°. 3.10 KAG100-100000-05 1 pc. Condensate drain connection 1" plug 3.12 OFQ201-100000-00 1 pc. Prime coat RAL 7040 Derogrund Hydro XT, 40 µm.

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	Impeller max. layer thickness of 40µm Housing surfaces: inside (40µm) & outside (40µm) Console surfaces: outside (40µm) Impeller surfaces: 40µm 3.14 OFQ203-000000-01 1 pc. Top coat RAL 5005 2K Derocryl 70 ST, 40 µm. Should you If you would like a different RAL colour, please let us know when ordering. Housing surfaces: outside (40µm) Console surfaces: outside (40µm) Motor surfaces 40µm 3.16 SPZ423-050045-06 4 pcs. Anti-vibration buffer with mounting plate (on the fan), Shore A55, D=50, overall height=54mm. Material: 1.0226 3.18 KPK203-000018-02 1 pc. Compensator, round with backing flange (steel parts). polyester, installation length 150 mm, DN 180, temperature-resistant up to 90°C, pressure-resistant up to max. +/- 2500 daPa. Perforation according to: DIN 24154 R2 3.20 LEK003-000018-06 1 pc. Guide plate DN 180 made of material 1.0226, bores according to DIN 24154 R2. 3.22 KPK302-011012-02 1 pc. Compensator, angular with backing flange (steel parts). polyester, installation length 150 mm, AN 112 x BN 125, temperature-resistant up to 90°C, pressure-resistant up to max. +/- 2500 daPa. Perforation according to: DIN 24193 R3 3.24 LEK002-011012-06 1 pc. Guide plate AN/BN 112 / 125 made of material 1.0226, bores according to DIN 24193 R3.
WXE022-120104-45	Shaft according to RWN0090-00, material: 1.0503, bearing type: SNB, Bearing size: 224.
DHL000-120084-03	Spacer sleeve for bearings
MXE063-006330-00	
RDA 030-0800 15-00 NR: 353788	
MA 217/380-00	
MAE 025-025030-00/GL	
KBE 071-670010-00	impeller impeller of the fan

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
MXE045-005330-00	Centrifugal fan without motor, impeller mounted on motor shaft, Engine arranged on console stand. Technical data according to data sheet and current dimension sheet (if applicable, please request). Direction of rotation: GR360. DMB152-05-523-31 Low-voltage three-phase motor with squirrel cage rotor, 2950 1/min, 5.5 kW, 400VD, 50 Hz, IMB3, IE3, IP55, 3 PTC thermistor, Made by Lammers. MAU000-000132-00 Engine installation costs 1.08 KSX001-038190-60 1 Cooling disc (including contact protection) 1.10 IOG301-010000-03 Inspection opening, material: 1.0038, size: 100x150 mm. Arrangement at 45°. 1.12 KAG100-100000-05 Condensate drain connection 1" plug 1.14 OFQ201-100000-00 Primer coat RAL 7040 Derogrund Hydro XT, 40 µm. Impeller max. layer thickness of 40µm - Housing surfaces: inside (40µm) & outside (40µm) - Console surfaces: outside (40µm) - Impeller surfaces: 40µm 1.16 OFQ203-100000-00 Top coat RAL 5005 2K Derocryl 70 ST, 40 µm. Should you If you would like a different RAL tone, please let us know when ordering. - Housing surfaces: outside (40µm) - Console surfaces: outside (40µm) - Motor surfaces - 40µm 1.18 SPZ423-050045-06 Anti-vibration metal buffer with mounting plate (on the fan), Shore A 55, D = 50, total height = 54 mm. Material: 1.0226 KPK203-000025-03 Compensator, round with backing flange (steel parts). Glass fabric, installation length 150 mm, DN 250, temperature-resistant up to 180°C, pressure-resistant up to max. +/- 2000 daPa. Perforation according to: DIN 24154 R2 1.22 LEK003-000025-06 Baffle DN 250 made of material 1.0226, holes according to DIN 24154 R2. 1.24 KPK302-020016-03 Compensator, square with backing flange (steel parts). Glass fabric, installation length 150 mm, AN 200 x BN 160, temperature-resistant up to 180°C, pressure-resistant up to max. +/- 2000 daPa.

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	Perforation according to: DIN 24193 R3 1.26 LEK002-020016-06 Baffle AN/BN 200 / 160 made of material 1.0226, holes according to DIN 24193 R3. 1.28 DOU200-000001-00 Standard documentation: fan data sheet, accessory card, Spare parts list, characteristic curve in English/German. The dimension sheet is only available in German/English. Operating instructions as well Storage regulations, EC declaration of conformity or Declaration of incorporation in EU languages, all documents in one copy electronic form. documentation and Operating instructions for contractually agreed accessories such as for example motors, frequency converters, actuators, etc. according to the standard of the respective supplier. If we give you these documents are not available in the requested language If you can provide this, you will receive it in English Language.
DMB152-05-523-31	Low-voltage three-phase motor with squirrel cage rotor, 2950 1/min, 5.5 kW, 400VD, 50 Hz, IMB3, IE3, IP55, 3 PTC thermistor, Made by Lammers.
KXE 016-080010-00	
MXE080-002830-00	Radial fan without motor, impeller mounted on motor shaft, Engine mounted on console bracket. Technical data according to data sheet and current dimension sheet (if necessary please Direction of rotation: GR360. Tolerances according to accuracy class AN3 according to ISO 13348:2007-01.
DMB152-07-523-31	Low-voltage three-phase motor with squirrel cage rotor, 2950 1/min, 7.5 kW, 400VD, 50 Hz, IMB3, IE3, IP55, 3 PTC thermistor, Lammers brand.
MAU000-000132-00	
IOG301-006000-03	Inspection opening, material: 1.0038, size: 60x150 mm. Arrangement at 45 °.
KAG100-100000-05	Condensate drain nozzle 1 " plug
OFQ201-100000-00	Primer coat RAL 7040 Derogrund Hydro XT, 40 µm. impeller max. layer thickness of 40µm - Housing surfaces: inside (40µm) & outside (40µm) - Console surfaces: outside (40µm)

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	- Impeller surfaces: 40µm
OFQ203-100000-00	Top coat RAL 5005 2K Derocryl 70 ST, 40 µm. If you If you would like a different RAL colour, please let us know when ordering. - Housing surfaces: outside (40µm) - Console surfaces: outside (40µm) - Motor surfaces - 40µm
SPZ423-050045-06	Vibration metal buffer with mounting plate (on the fan), Shore A 55, D = 50, total height = 54 mm. Material: 1.0226
KPK203-000020-02	Compensator, round with backing flange (steel parts), made of Neoprene - glass fabric, installation length 150 mm, DN 200, temperature resistant up to 90°C, pressure resistant up to max. +/- 2500 daPa. Hole punching according to: DIN 24154 R2
LEK003-000020-06	Baffle DN 200 made of material 1.0226, holes according to DIN 24154 R2
KPK302-012012-02	Compensator, square with backing flange (steel parts), made of Neoprene - glass fabric, installation length 150 mm, AN 125 x BN 125 , temperature resistant up to 90°C, pressure resistant up to max. +/- 2500 daPa. Hole punching according to: DIN 24193 R3
LEK002-012012-06	Guide plate AN/BN 125 / 125 made of material 1.0226, holes according to DIN 24193 R3.
595 FN5	
M 17/800	Serial No/Year: 560273 - 2008 Com No: 60273 Fan Data with a density of: 1,2 kg/m^3 Inlet Temp.: 20 C° Volume Flow: 17 m^3/min Total Press increase: 840 daPa Shaft Rating: 4.5 kW Speed: 2915 1/min Working Temperature: max. 80 C°
FAN WHEEL (FOR M 17/800)	Type: M 17/800 Serial No/Year: 560273 - 2008 Com No: 60273 Fan Data with a density of: 1,2 kg/m^3 Inlet Temp.: 20 C°

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
	Volume Flow: 17 m^3/min Total Press increase: 840 daPa Shaft Rating: 4.5 kW Speed: 2915 1/min Working Temperature: max. 80 C°
MKV-R 020	
Lre040-050015-52-1	
Kxe063-000830-00	
70006589	
Kxe-040-160015-00	
Kxe315-016036-00	
Fpf101-056040-00	
Lre035-037515-50-2	
Lre040-080015-50-0	
Lek003-000022-00	
Kpk203-000028-02	
Kpk203-000014-02	
Kpk302-031025-02	
Frl000-000100-00	
281815/2011	
Kpk203-000025-02	
Kpk203-000016-02	
Kpk302-035028-02	
Kpk203-000035-02	
Mxe040-008030-00	
Kpk203-000040-02	
Type Rvm 04/180-30 51386	
Tkv-010	

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
Zrs-Dbbdaacbbab	
Kpk203-000028-03	
Kun100-100095-00	
Mxe-200-008036-00	
Alu-Gbu	
Hxl000-002309-00	
Kun200-100095-00	
Kpk203-000125-03	
Wll001-002309-00	
Sll000-000609-00	
Mxe080-011230-00	
M.21mxe040d1003	
Kxe180-006330-00	
O.N:Rff113-018016-00	
300401268 Filter Round With Rainhood Inlet Opening Dn 160 Max	
Dbw101-000110-03	
300401270 Filter Round With Rainhood Inlet Opening Dn 140 Max	
Snl012-211519-00	
Dwb101-000050-00	
Lre035-023630-53-0	
Kpk203-000140-04	
1tz9001-1db234ab4-Z	
Lre303922	
Kpk203-000022-02	
300401269 Filter Round With Rainhood	

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.

Yursat Dış Tic. Mühendislik
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

Ürün	Açıklama
Inlet Opening Dn 160 Max	
Kxe035-006030-00	
1tz9001-1cb034aa4-Z	
Lek003-000014-00	
Lre040-100015-00	
70017302	
Lre303942	
Mxe 225 – 006336 – 00	
Rew101-100100-25	
Lre035-030030-53-0	

YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.