
**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

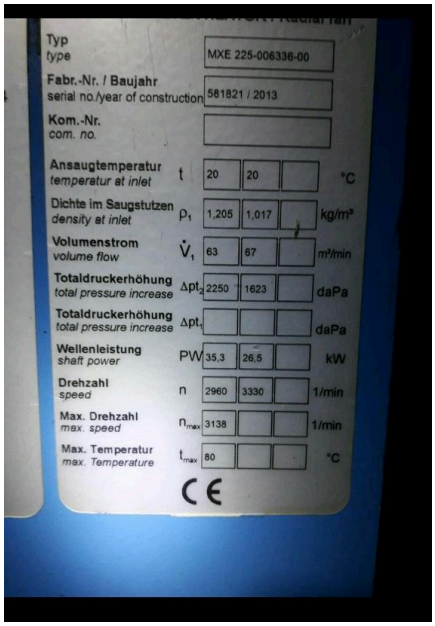


# Reitz

Garanti: 12 ay

Bu ürüne ait Türkiye içi kapı teslim fiyat ve teslim süresi içeren teklifimizi almak için **info@yursat.com.tr** e-posta adresine ya da www.yursat.com.tr/iletisim adresindeki iletişim formu üzerinden bizlere ulaşabilirsiniz.

**Reitz** Markası, tedarik süresi için lütfen bizimle iletişime geçiniz.

*Firmamız Reitz Türkiye Distribütörü veya temsilcisi değildir. Firmamız sipariş durumunda, belirtilen ürünlerde sadece Orjinal ve yeni ürün teklifi sunmaktadır. Bu sitede gösterilen Özel marka adları ve ticari markalar ilgili sahiplerinin mülkiyetindedir, talep durumunda kaldırılmaktadır.*

| Ürün | Açıklama |
|---|---|
| 17.9.00019.00001 NR.340432 NW250 | |
| Pressurizer KPK302-063050 | RWN0038-00 KPK302-063050 RWN0038-00 |
| MXE063-000830-00 | Centrifugal fan without motor, impeller mounted on motor shaft, Engine arranged on console stand. Technical specifications according to the data sheet and current dimension sheet (if necessary, please<br>request). Direction of rotation: GR360.<br>+<br>1.04 DMB152-03-023-31 1 pc.<br>Low-voltage three-phase squirrel-cage motor, 2920<br>1/min, 3 kW, 400VD, 50 Hz, IMB3, IE3, IP55, 3 PTC thermistors, Made by Lammers<br>1.06 MAU000-000100-00 1 pc.<br>engine mounting costs<br>1.08 IOG301-006000-03 1 pc.<br>Inspection opening, material: 1.0038, size: 60x150 mm. Arrangement at 45°.<br>1.10 KAG100-100000-05 1 pc.<br>Condensate drain connection 1" plug<br>1.12 OFQ201-100000-00 1 pc.<br>Prime coat RAL 7040 Derogrund Hydro XT, 40 µm.<br>Impeller max. layer thickness of 40µm<br>Housing surfaces: inside (40µm) & outside (40µm)<br>Console surfaces: outside (40µm)<br>Impeller surfaces: 40µm<br>1.14 OFQ203-000000-01 1 pc.<br>Top coat RAL 5005 2K Derocryl 70 ST, 40 µm. Should you<br>If you would like a different RAL colour, please let us know when ordering. |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | Housing surfaces: outside (40µm)<br>Console surfaces: outside (40µm)<br>Motor surfaces 40µm<br>1.16 SPZ423-050045-06 4 pcs.<br>Anti-vibration buffer with mounting plate (on the fan), Shore A55, D=50, overall height=54mm. Material: 1.0226<br>1.18 KPK203-000014-02 1 pc.<br>Compensator, round with backing flange (steel parts). polyester, installation length 150 mm, DN 140, temperature-resistant up to 90°C, pressure-resistant up to max. +/- 2500<br>daPa.<br>Perforation according to: DIN 24154 R2<br>1.20 LEK003-000014-06 1 pc.<br>Guide plate DN 140 made of material 1.0226, bores according to DIN<br>24154 R2.<br>1.22 KPK302-010012-02 1 pc.<br>Compensator, angular with backing flange (steel parts). polyester, installation length 150 mm, AN 100 x BN 125, temperature-resistant up to 90°C, pressure-resistant up to max. +/- 2500<br>daPa.<br>Perforation according to: DIN 24193 R3<br>1.24 LEK002-010012-06 1 pc.<br>Guide plate AN/BN 100 / 125 made of material 1.0226, bores according to DIN 24193 R3. |
| MXE063-001230-00 | Centrifugal fan without motor, impeller mounted on motor shaft, Engine arranged on console stand. Technical specifications according to the data sheet and current dimension sheet (if necessary, please<br>request). Direction of rotation: GR360.<br>+<br>2.04 DMB152-04-023-31 1 pc.<br>Low-voltage three-phase squirrel-cage motor, 2950 1/min, 4 kW, 400VD, 50 Hz, IMB3, IE3, IP55, 3 PTC thermistors, Made by Lammers.<br>2.06 MAU000-000112-00 1 piece<br>engine mounting costs<br>2.08 IOG301-006000-03 1 pc.<br>Inspection opening, material: 1.0038, size: 60x150 mm. Arrangement at 45°.<br>2.10 KAG100-100000-05 1 piece<br>Condensate drain connection 1" plug<br>2.12 OFQ201-100000-00 1 pc.<br>Prime coat RAL 7040 Derogrund Hydro XT, 40 µm.<br>Impeller max. layer thickness of 40µm<br>Housing surfaces: inside (40µm) & outside (40µm)<br>Console surfaces: outside (40µm)<br>Impeller surfaces: 40µm |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | 2.14 OFQ203-000000-01 1 pc.<br>Top coat RAL 5005 2K Derocryl 70 ST, 40 µm. Should you<br>If you would like a different RAL colour, please let us know<br>when ordering.<br>Housing surfaces: outside (40µm)<br>Console surfaces: outside (40µm)<br>Motor surfaces 40µm<br>2.16 SPZ423-050045-06 4 pcs.<br>Anti-vibration buffer with mounting plate (on the fan), Shore<br>A55, D=50, overall height=54mm. Material: 1.0226<br>2.18 KPK203-000016-02 1 piece<br>Compensator, round with backing flange (steel parts).<br>polyester, installation length 150 mm, DN 160,<br>temperature-resistant up to 90°C, pressure-resistant up to max.<br>+/- 2500<br>daPa.<br>Perforation according to: DIN 24154 R2<br>2.20 LEK003-000016-06 1 pc.<br>Guide plate DN 160 made of material 1.0226, bores according to<br>DIN<br>24154 R2.<br>2.22 KPK302-010012-02 1 piece<br>Compensator, angular with backing flange (steel parts).<br>polyester, installation length 150 mm, AN 100 x BN 125,<br>temperature-resistant up to 90°C, pressure-resistant up to max.<br>+/- 2500<br>daPa.<br>Perforation according to: DIN 24193 R3<br>2.24 LEK002-010012-06 1 pc.<br>Guide plate AN/BN 100 / 125 made of material 1.0226, bores<br>according to DIN 24193 R3. |
| MXE063-002030-00 | Centrifugal fan without motor, impeller mounted on motor shaft,<br>Engine arranged on console stand. Technical specifications<br>according to the data sheet and current dimension sheet (if<br>necessary, please<br>request). Direction of rotation: GR360.<br>+<br>3.04 DMB150-000000-00 1 pc.<br>Low-voltage three-phase squirrel-cage motor, 2950<br>1/min, 5.5 kW, 440VD, 50 Hz, IMB3, IE3, IP55, 3 PTC thermistors,<br>Made by Lammers.<br>3.06 MAU000-000132-00 1 pc.<br>engine mounting costs<br>3.08 IOG301-006000-03 1 pc.<br>Inspection opening, material: 1.0038, size: 60x150 mm.<br>Arrangement at 45°.<br>3.10 KAG100-100000-05 1 pc.<br>Condensate drain connection 1" plug<br>3.12 OFQ201-100000-00 1 pc.<br>Prime coat RAL 7040 Derogrund Hydro XT, 40 µm. |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | Impeller max. layer thickness of 40µm<br>Housing surfaces: inside (40µm) & outside (40µm)<br>Console surfaces: outside (40µm)<br>Impeller surfaces: 40µm<br>3.14 OFQ203-000000-01 1 pc.<br>Top coat RAL 5005 2K Derocryl 70 ST, 40 µm. Should you<br>If you would like a different RAL colour, please let us know<br>when ordering.<br>Housing surfaces: outside (40µm)<br>Console surfaces: outside (40µm)<br>Motor surfaces 40µm<br>3.16 SPZ423-050045-06 4 pcs.<br>Anti-vibration buffer with mounting plate (on the fan), Shore<br>A55, D=50, overall height=54mm. Material: 1.0226<br>3.18 KPK203-000018-02 1 pc.<br>Compensator, round with backing flange (steel parts).<br>polyester, installation length 150 mm, DN 180,<br>temperature-resistant up to 90°C, pressure-resistant up to max.<br>+/- 2500<br>daPa.<br>Perforation according to: DIN 24154 R2<br>3.20 LEK003-000018-06 1 pc.<br>Guide plate DN 180 made of material 1.0226, bores according to<br>DIN<br>24154 R2.<br>3.22 KPK302-011012-02 1 pc.<br>Compensator, angular with backing flange (steel parts).<br>polyester, installation length 150 mm, AN 112 x BN 125,<br>temperature-resistant up to 90°C, pressure-resistant up to max.<br>+/- 2500<br>daPa.<br>Perforation according to: DIN 24193 R3<br>3.24 LEK002-011012-06 1 pc.<br>Guide plate AN/BN 112 / 125 made of material 1.0226, bores<br>according to DIN 24193 R3. |
| WXE022-120104-45 | Shaft according to RWN0090-00, material: 1.0503, bearing type:<br>SNB,<br>Bearing size: 224. |
| DHL000-120084-03 | Spacer sleeve for bearings |
| MXE063-006330-00 | |
| RDA 030-0800 15-00 NR: 353788 | |
| MA 217/380-00 | |
| MAE 025-025030-00/GL | |
| KBE 071-670010-00 | impeller impeller of the fan |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| MXE045-005330-00 | Centrifugal fan without motor, impeller mounted on motor shaft, Engine arranged on console stand. Technical data according to data sheet and current dimension sheet (if applicable, please request). Direction of rotation: GR360.<br><br>DMB152-05-523-31<br>Low-voltage three-phase motor with squirrel cage rotor, 2950 1/min, 5.5 kW, 400VD, 50 Hz, IMB3, IE3, IP55, 3 PTC thermistor, Made by Lammers.<br>MAU000-000132-00<br>Engine installation costs<br>1.08 KSX001-038190-60 1<br>Cooling disc (including contact protection)<br>1.10 IOG301-010000-03<br>Inspection opening, material: 1.0038, size: 100x150 mm. Arrangement at 45°.<br>1.12 KAG100-100000-05<br>Condensate drain connection 1" plug<br>1.14 OFQ201-100000-00<br>Primer coat RAL 7040 Derogrund Hydro XT, 40 µm.<br>Impeller max. layer thickness of 40µm<br>- Housing surfaces: inside (40µm) & outside (40µm)<br>- Console surfaces: outside (40µm)<br>- Impeller surfaces: 40µm<br>1.16 OFQ203-100000-00<br>Top coat RAL 5005 2K Derocryl 70 ST, 40 µm. Should you If you would like a different RAL tone, please let us know when ordering.<br>- Housing surfaces: outside (40µm)<br>- Console surfaces: outside (40µm)<br>- Motor surfaces - 40µm<br>1.18 SPZ423-050045-06<br>Anti-vibration metal buffer with mounting plate (on the fan), Shore A 55, D = 50, total height = 54 mm. Material: 1.0226<br>KPK203-000025-03<br>Compensator, round with backing flange (steel parts). Glass fabric, installation length 150 mm, DN 250, temperature-resistant up to 180°C, pressure-resistant up to max. +/- 2000 daPa.<br>Perforation according to: DIN 24154 R2<br>1.22 LEK003-000025-06<br>Baffle DN 250 made of material 1.0226, holes according to DIN 24154 R2.<br>1.24 KPK302-020016-03<br>Compensator, square with backing flange (steel parts). Glass fabric, installation length 150 mm, AN 200 x BN 160, temperature-resistant up to 180°C, pressure-resistant up to max. +/- 2000 daPa. |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | Perforation according to: DIN 24193 R3<br>1.26 LEK002-020016-06<br>Baffle AN/BN 200 / 160 made of material 1.0226, holes according to DIN 24193 R3.<br>1.28 DOU200-000001-00<br>Standard documentation: fan data sheet, accessory card, Spare parts list, characteristic curve in English/German. The dimension sheet is<br>only available in German/English. Operating instructions as well Storage regulations, EC declaration of conformity or Declaration of incorporation in EU languages, all documents in one copy<br>electronic form. documentation and<br>Operating instructions for contractually agreed accessories such as for example motors, frequency converters, actuators, etc. according to the standard of the respective supplier. If we give you these documents are not available in the requested language<br>If you can provide this, you will receive it in English Language. |
| DMB152-05-523-31 | Low-voltage three-phase motor with squirrel cage rotor, 2950 1/min, 5.5 kW, 400VD, 50 Hz, IMB3, IE3, IP55, 3 PTC thermistor, Made by Lammers. |
| KXE 016-080010-00 | |
| MXE080-002830-00 | Radial fan without motor, impeller mounted on motor shaft, Engine mounted on console bracket. Technical data according to data sheet and current dimension sheet (if necessary please<br>Direction of rotation: GR360.<br>Tolerances according to accuracy class AN3 according to ISO 13348:2007-01. |
| DMB152-07-523-31 | Low-voltage three-phase motor with squirrel cage rotor, 2950 1/min, 7.5 kW, 400VD, 50 Hz, IMB3, IE3, IP55, 3 PTC thermistor, Lammers brand. |
| MAU000-000132-00 | |
| IOG301-006000-03 | Inspection opening, material: 1.0038, size: 60x150 mm. Arrangement at 45 °. |
| KAG100-100000-05 | Condensate drain nozzle 1 " plug |
| OFQ201-100000-00 | Primer coat RAL 7040 Derogrund Hydro XT, 40 µm. impeller max. layer thickness of 40µm<br>- Housing surfaces: inside (40µm) & outside (40µm)<br>- Console surfaces: outside (40µm) |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | - Impeller surfaces: 40µm |
| OFQ203-100000-00 | Top coat RAL 5005 2K Derocryl 70 ST, 40 µm. If you<br>If you would like a different RAL colour, please let us know when ordering.<br>- Housing surfaces: outside (40µm)<br>- Console surfaces: outside (40µm)<br>- Motor surfaces - 40µm |
| SPZ423-050045-06 | Vibration metal buffer with mounting plate (on the fan), Shore A 55, D = 50, total height = 54 mm. Material: 1.0226 |
| KPK203-000020-02 | Compensator, round with backing flange (steel parts), made of Neoprene - glass fabric, installation length 150 mm, DN 200, temperature resistant up to 90°C, pressure resistant up to max. +/- 2500<br>daPa.<br>Hole punching according to: DIN 24154 R2 |
| LEK003-000020-06 | Baffle DN 200 made of material 1.0226, holes according to DIN 24154 R2 |
| KPK302-012012-02 | Compensator, square with backing flange (steel parts), made of Neoprene - glass fabric, installation length 150 mm, AN 125 x BN 125 , temperature resistant up to 90°C, pressure resistant up to max. +/-<br>2500 daPa.<br>Hole punching according to: DIN 24193 R3 |
| LEK002-012012-06 | Guide plate AN/BN 125 / 125 made of material 1.0226, holes according to DIN 24193 R3. |
| 595 FN5 | |
| M 17/800 | Serial No/Year: 560273 - 2008<br>Com No: 60273<br>Fan Data with a density of: 1,2 kg/m^3<br>Inlet Temp.: 20 C°<br>Volume Flow: 17 m^3/min<br>Total Press increase: 840 daPa<br>Shaft Rating: 4.5 kW<br>Speed: 2915 1/min<br>Working Temperature: max. 80 C° |
| FAN WHEEL (FOR M 17/800) | Type: M 17/800<br>Serial No/Year: 560273 - 2008<br>Com No: 60273<br>Fan Data with a density of: 1,2 kg/m^3<br>Inlet Temp.: 20 C° |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| | Volume Flow: 17 m^3/min<br>Total Press increase: 840 daPa<br>Shaft Rating: 4.5 kW<br>Speed: 2915 1/min<br>Working Temperature: max. 80 C° |
| MKV-R 020 | |
| Lre040-050015-52-1 | |
| Kxe063-000830-00 | |
| 70006589 | |
| Kxe-040-160015-00 | |
| Kxe315-016036-00 | |
| Fpf101-056040-00 | |
| Lre035-037515-50-2 | |
| Lre040-080015-50-0 | |
| Lek003-000022-00 | |
| Kpk203-000028-02 | |
| Kpk203-000014-02 | |
| Kpk302-031025-02 | |
| Frl000-000100-00 | |
| 281815/2011 | |
| Kpk203-000025-02 | |
| Kpk203-000016-02 | |
| Kpk302-035028-02 | |
| Kpk203-000035-02 | |
| Mxe040-008030-00 | |
| Kpk203-000040-02 | |
| Type Rvm 04/180-30  51386 | |
| Tkv-010 | |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| Zrs-Dbbdaacbbab | |
| Kpk203-000028-03 | |
| Kun100-100095-00 | |
| Mxe-200-008036-00 | |
| Alu-Gbu | |
| Hxl000-002309-00 | |
| Kun200-100095-00 | |
| Kpk203-000125-03 | |
| Wll001-002309-00 | |
| Sll000-000609-00 | |
| Mxe080-011230-00 | |
| M.21mxe040d1003 | |
| Kxe180-006330-00 | |
| O.N:Rff113-018016-00 | |
| 300401268 Filter Round With Rainhood Inlet Opening Dn 160 Max | |
| Dbw101-000110-03 | |
| 300401270 Filter Round With Rainhood Inlet Opening Dn 140 Max | |
| Snl012-211519-00 | |
| Dwb101-000050-00 | |
| Lre035-023630-53-0 | |
| Kpk203-000140-04 | |
| 1tz9001-1db234ab4-Z | |
| Lre303922 | |
| Kpk203-000022-02 | |
| 300401269 Filter Round With Rainhood | |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*

**Yursat Dış Tic. Mühendislik**
Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505
Osmangazi/BURSA
info@yursat.com.tr
www.yursat.com.tr

| Ürün | Açıklama |
|---|---|
| Inlet Opening Dn 160 Max | |
| Kxe035-006030-00 | |
| 1tz9001-1cb034aa4-Z | |
| Lek003-000014-00 | |
| Lre040-100015-00 | |
| 70017302 | |
| Lre303942 | |
| Mxe 225 – 006336 – 00 | |
| Rew101-100100-25 | |
| Lre035-030030-53-0 | |


*YURSAT yedek parça tedariği yapan bir şirkettir. Sitemizde bulunan markaların yetkili distribütörü yada temsilcisi değildir.*