


Rossi

Garanti: 12 ay
Bu ¼r¼ne ait T¼rkiye i¼i kapı teslim fiyat ve teslim s¼resi i¼eren teklifimizi almak i¼in info@yursat.com.tr e-posta adresine baŐvuru yapabilir ya da ayrıntılı bilgi i¼in +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaŐabilirsiniz. **Rossi** Markası, tedarik s¼resi i¼in l¼tfen bizimle iletiŐime ge¼iniz.

Firmamız Rossi T¼rkiye Distrib¼t¼r¼ veya temsilcisi deĐildir. Firmamız sipariŐ durumunda, belirtilen ¼r¼nlerde sadece Orjinal ve yeni ¼r¼n teklifi sunmaktadır. Bu sitede g¼sterilen Özel marka adları ve ticari markalar ilgili sahiplerinin m¼lkiyetindedir, talep durumunda kaldırılmaktadır.

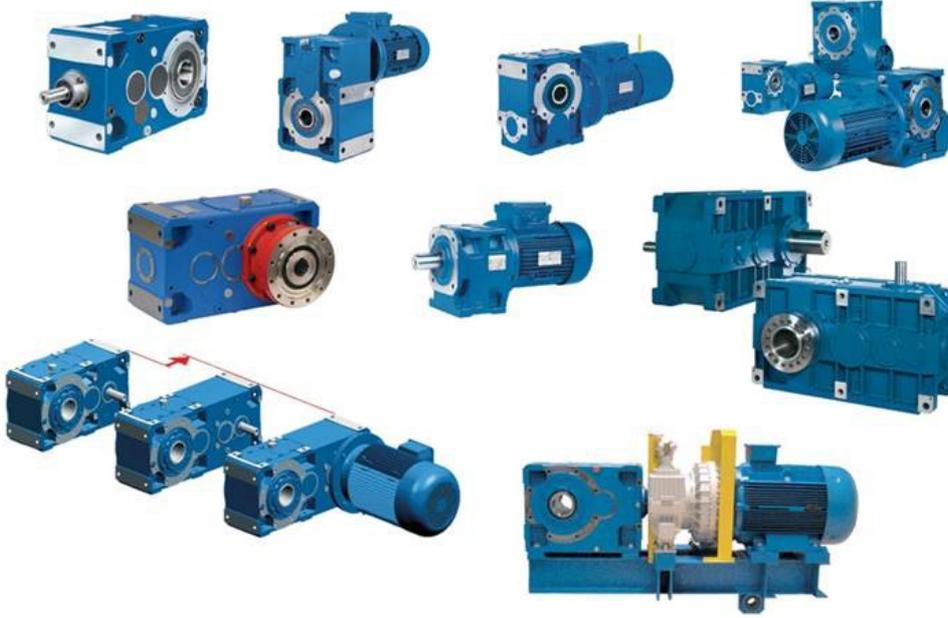

¼r¼n	A¼ıklama
MR IV 100 UO2A	Worm gear motor A cat Type B6 Without motor
GEARBOX. ROSSI RIDUTTORE,MRCI-80-U03A I=20.8	
GEARBOX. ROSSI RIDUTTORE MRCI 64 U03A/ I=25.2	
MR V 32 UO3A - 11x140 - 32	Worm gear motor A cat. Design V5 oversized. slow running. Hollow shaft diameter 20 (HM20) Gears with synthetic oil based on polyglycols for the Food industry Viscosity ISO VG 320 (type V5) Coupled to motor (terminal box position TB2) Motor Catalog TX (ErP) HB2 63B 4 230.400-50 B5 Pn [kW] = 0.18 Energy efficiency class.IE2 Identification plate 220.380-50 / 230.400-50 / 240.415-50 / 265.460-60 / 277.480-60 Plastic cable seal, mounted LOC, M20 e M16 (,PM31)
HB3Z 112M 4 230.400-50 B5A	Brake motor with DC brake Catalog TX (ErP) Pn [kW] = 4 Energy efficiency class.IE3 Identification plate 220.380-50 / 230.400-50 / 240.415-50 / 265.460-60 / 277.480-60 Manual air release lever with automat. Reset L (,L) Direct brake power supply 200 ÷ 440 V DS
RC 126P04R	
Cod.1332112000	BRAKE DISC BF-BZ 06S BERAL 1121
HBZ 112M,	Brake discs (4 pairs) It is shown in the 13th number in the list.
Pos. 13	
	Worm gear motor AS Cat. - STANDARDFIT Design B3 Fluorinated sealing

MR V 325 UO4E - 14x105 - 24	rings for high and low speed. Shaft (TV3) Coupled to motor Brake motor with DC brake Catalog TX (ErP) HB3Z 80B 4 230.400-50 B14R Pn [kW] = 0.75 Energy efficiency class. IE3 Type plate 220.380-50 / 230.400-50 / 240.415-50 / 265.460 -60 / 277.480-60 Direct brake power supply 110 ÷ 440 V DS
MR V 325 UO4E - 14x105 - 24 (without motor)	Worm gear motor AS Cat. - STANDARDFIT Type B3 Fluorinated sealing rings on high and low speed. Wave (TV3) Without motor
R 3EL 085A 167Y Z150M1 F05h I65x550 B5	Planetary gear motor EP catalogue Without motor
MR2I 63 uc2a	350 Per Min With a mixing fan(SI37,ColorOpoxi) With mixing couple with the motor Model HR2I100L4B5 3 bar,400 volt,3 kilowatt,1450 rotation per min
12060205	
MR IV 63UO3AB5V6N°13.8I102HB71B4	
Brake disc	
MR V 50 UO3A - 19x200 - 20	Type B6 B5 flange (F1) Without motor
MR 3I 40 FC1A - 14x160 - 40,5	Design V1 High drive speed (N) Without motor
Motor catalog TX (ErP)	HB 80C 6 230.400-50 B5 Pn [kW] = 0,75 Intermittent Duty S3-70% Nameplate 230.400-50 / 265.460-60
Helical gearmotor catalog G	MR 4I 100 UP2A - 19x200 - 163 Mounting position B6 Without motor
MR CI 100 UO3A - 38x300 - 12,4	Bevel helical geared motor Catalog G Type B3 Without motor
RCI 160 UO2A / 6,27 F.C.V6	
MR ICI 100 UO3A	Bevel helical geared motor MR ICI 100 UO3A - 24x200 - 31,4 Without motor Katalog G
1" ROSS WALF 3/2	
1/2" ROSS 3/2 VALF	
1/4" ROSS 3/2 VALF	
MR3I280UP2A	
Code : MR 2E 112 F C 2 L N i=	35 24x50 M8 130 110 B5 S5
R V 40 UO3D - 10	Worm gear A cat. R V 40 UO3D - 10 Design V5 Drive speed n1 = 280 - 1800 min-1
MRCI63 UO3A,I:6.31,24,145	
Worm servo gearbox catalog SR13	MR V 50 UO3A / 32 - P04 19x40 Type B3-B8 Drive coupling dimensions (M1,N1,F1): 130, 110, M8 Without motor
Worm gear motor A cat.	MR IV 63 UO3A - 14x160 - 152 Design V5 Coupled with engine Brake motor with GS brake catalog TX (ErP) HB2Z 71B 4 230.400-50 B5 Pn [kW] = 0.37 Energy efficiency class IE2 Nameplate 220.380-50 / 230.400-50 / 240,415-50 / 265,460-60 / 277,480-60 Direct brake supply 110 ÷ 440 V DS
RCI200 UO2A	TV1 510
RC00024525	MULTI-VOLTAGE EQUAL RM2 PLUS HBHBV-HBZ
RCI200 UO2A	TV1 510
Bevel gear motor L99 Cat.	MR C 125 PO1H - D. 38-300 / 2 Design B3 Without motor
MOT. 3+ HB 80B 6 B5 ? NR ICI 64 UO3A-	2510708073 2510708116

19X200	
HBZ 63B 4 B5	
REDUCER BODY ROSSI MR IV 80 UO3A	
MR IV 100 UO2A R000019605	
R000019605 PINION AND GROUND	
MR IV 80 UO3A R000025323	
R V 40 UO3D - 10	Worm gear A Cat. R V 40 UO3D - 10 Design V5 Input speed n1 = 280 - 1800 min-1
W6077B3401	5/3-WV ISO 2 MAGN. BETH.GENDER MEDIUM ST. NOT RESTING Voltage: 24 VDC, 48/50-60, 5.8 WATT
MR ICI 63 UO3A / 40 - P06 24x50	Bevel-helical servo gearbox catalog SR13 type B7 Drive coupling dimensions (M1,N1,F1) : 130, 110, M8 Without engine
MR 2I 80 UP2A - 24x200 - 20,8	helical gear motor catalog G design B6 High drive speed n1 2800 min-1 Without engine
R CI 280 UO2A - 11,3	Bevel-helical gear units Catalog G V6 design Input speed n1 1400 min-1 Fluorinated sealing rings on quick and slow-speed wave (TV3) Oil temperature sensor (IT4) Bearing lubrication pump (P) Version for agitators External cooling with fan (RV) Metal screws; filler cap with filter and valve (TM3)
HB3F 90S 6 230.400-50 B5R	Brake motor with DS brake catalog TX (ErP) Pn [kW] = 0.75 Energy efficiency class IE3
R C2I 280 UO2V - 37,5	Bevel-helical gear units Catalog G Type B6 Input speed n1 250 min-1 Painting cycle 1H Color Blue RAL 5010 (corrosiveness class C4 L) Metal screws; filler cap with filter and valve (TM3) Oil level on both sides Special design: Provision for mounting the support bracket to UO2V
MR V 32 UO3A - 11x140 - 32	Worm gear motor A Cat. Type V5 Without engine
MR V 50 UO3A - 19x200 - 20	Worm gear motor A Cat. MR V 50 UO3A - 19x200 - 20 Type B6 Standard painting cycle 2A (corrosiveness class C3 H) color Black RAL 9005 Without engine
MRV63UO3A R:40 R000197137	
R V 40 UO3A 215	REDUCER
MRC2I140UO2H_Rossi	
MRC2I140UO2HS_Rossi	
A15 DIN90 LZ350 cardan	
DIN90 counter flange	
MR ICI 125 UO3A - 38x300 - 32,5	Bevel helical gear motor catalog G MR ICI 125 UO3A - 38x300 - 32.5 Design B6 B5 flange (F1) Fluorinated sealing rings for high-speed and low-speed operation. Shaft (TV3) Double seal of the slow-speed shaft (DT2) Not painted; only primed. Metal screws; filling screw with filter and valve (TM3) Coupled with motor Engine Catalog TX (ErP) HB3 132M 4 230.400-50 B5 Pn [kW] = 7.5 Energy efficiency class IE3 Type plate 220.380-50 / 230.400-50 / 240.415-50 / 265.460-60 / 277.480-60
SR13 MR V 50 UO3A / 16 - P03 19x4	Worm servo gearbox catalog SR13 MR V 50 UO3A / 16 - P03 19x40 Design B6 Drive coupling dimensions (M1,N1,F1): 115, 95, M8 Without a motor
1500rpm B5	
Mrci 100 Uo3a-112	

Hbz 132mb 6 B3
5 Res 160 S4 B5
3ma71b4b5codtmo708494
Mr 3i 126 Uc2a
Motorhaube Vorne - Neuer Typ 3 KW
N.664795.E
Mr Ci 160 Uo2a
Mrc2120uo2a+cps132m25
R Ci 80 Uo3a
R C2i 280 Uo2a
R21 160 Up 2a 6.41 B3 98kw
V35x8
R3i100uc2a/29
Mrv80uo3a 230.400
Res 132 M4
Rr1-Rw1
Mr1v100u02a-90s4
Mr3180fc1a+fv0905212b5
Mr3140pc1a
Mr2i 125 Up2a I 6.53 5res 132 M4 B5 Ip55
Pignone 5.65
Mrci 80 Uo3a 601
132m 4 230.400-50 B5
Mr 3i 125 Up2a B3 C/W
Rm2 Plus-Hb
Mr Iv 100 Uo2a-100
Mr3i63uc2a-90lc4
Motore Rossi
Mr-3i-125up2a 12m4
Mr 2i 125 Uc2a - Hb3 160l 4 - B5 / 88,2
Rd1
Lr341-61-068
1001074
Hbz 180l 4 400-50 B5
D32-380/56-40

4.418.103.117	
R 3eb 001a 43,4y Z040m1 F05a I24x200 B52	
Mr 3i 63 Uc2a 602	
Bc 16 178 75	
Sr13 Mr 3i 80 Uc2a	
Mr3180pcia80v6	
Mrv160uo2a	
Hb2 132 Mb6	
Hintere Motorabdeckung - Alter Typ	3 KW
Hf132mc4 11kw B5 F Ip55 S1 No.35364706	
Hintere Motorabdeckung - Neuer Typ	3 KW
Rc2i160uo2hs	
Mr C2i 225 Uo2v	
Mrv80u03df08be	
Mrv1v63uo2a+fo80a6b5	
Motorhaube Vorne - Alter Typ	3 KW
Wa 893269	
Mr2i 80	
5res 200m 6	
Mrv63u03a-80ba	
Mr 2i 51 Uc2a - Hb2 90l 4 230.400-50 B5 / 145	
Mr 2i 101 Uc2a - Hb3 160l 4 - B5 / 178	
Mr Iv 161	
Mr Ici 63 Uo3a-14x160	
N.664796.F	
Mr Ci 81 Uo3a	
Mrci81uo3a	
Mr3101uca2	
R31200up2ab3	
Rc2i140u02hs	
Mr3i125pc1a112m6	
Hbz 80b 4 230.400-50 B5	
Rv 050 Uo3a/63	
Mr 3i 63 Uc2a - Hb2 90l 4 230.400-50 B5 / 84,7	
Mr 3i 180 Up2a	
MR V 63 UO3A	Worm gear motor A Cat MR V 63 UO3A - 14x160 - 40 Design B3-B8

Without a motor	
Hrici63403a294v519160	
5 Res 132 M4	
G05mrci140uo2a-Hbz132mc 6	
5ref 200m 6	
R 2eb 002a	
R 31 160up2a 102	
V62x10	
Hff 80b 4 B5 + Mr 315 Pce	
Mr Ci 80 Uo3a	
Mriv125po2acf100la4	
Rr1 440	
06mc80-10	
Mr 3i 81 Uc2a	
R31 280 Up2d/32.5-B6	
Mr-C1-81-U03a-100	
Mr2140fci29411140	
Mr31 160 Uc2a-5res 200m 6 277	
Mr 2i 81 Uc2a - Hb3 132m 4 - B5 / 187	
Hb 71c 2 230.400-50 B5	Motor Katalog TX (ErP) Pn [kW] = 0,75 Aussetzbetrieb S3-70% Typenschild 230.400-50 / 265.460-60 Thermistor-Thermof¼hler (Grenzwert 150 ¼C) (,T15)
Mriv80uo3a 80a4	
Mr3i80uc2a	
Mr V 325 Uo4e 417	SIEHE ANHANG
Mriv80u02a+fo71b/1b5	
132l 4 230.400-50 B5	
Pignone 5.65 A	