


Torex

Garanti: 12 ay
Bu ¼r¼ne ait T¼rkiye ii kapı teslim fiyat ve teslim s¼resi ieren teklifimizi almak iin info@yursat.com.tr e-posta adresine baŐvuru yapabilir ya da ayrıntılı bilgi iin +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaŐabilirsiniz. **Torex** Markası, tedarik s¼resi iin l¼tfen bizimle iletiŐime geiniz.

Firmamız Torex T¼rkiye Distrib¼t¼r¼ veya temsilcisi deĐildir. Firmamız sipariŐ durumunda, belirtilen ¼r¼nlerde sadece Orjinal ve yeni ¼r¼n teklifi sunmaktadır. Bu sitede g¼sterilen ¼zel marka adları ve ticari markalar ilgili sahiplerinin m¼lkiyetindedir, talep durumunda kaldırılmaktadır.



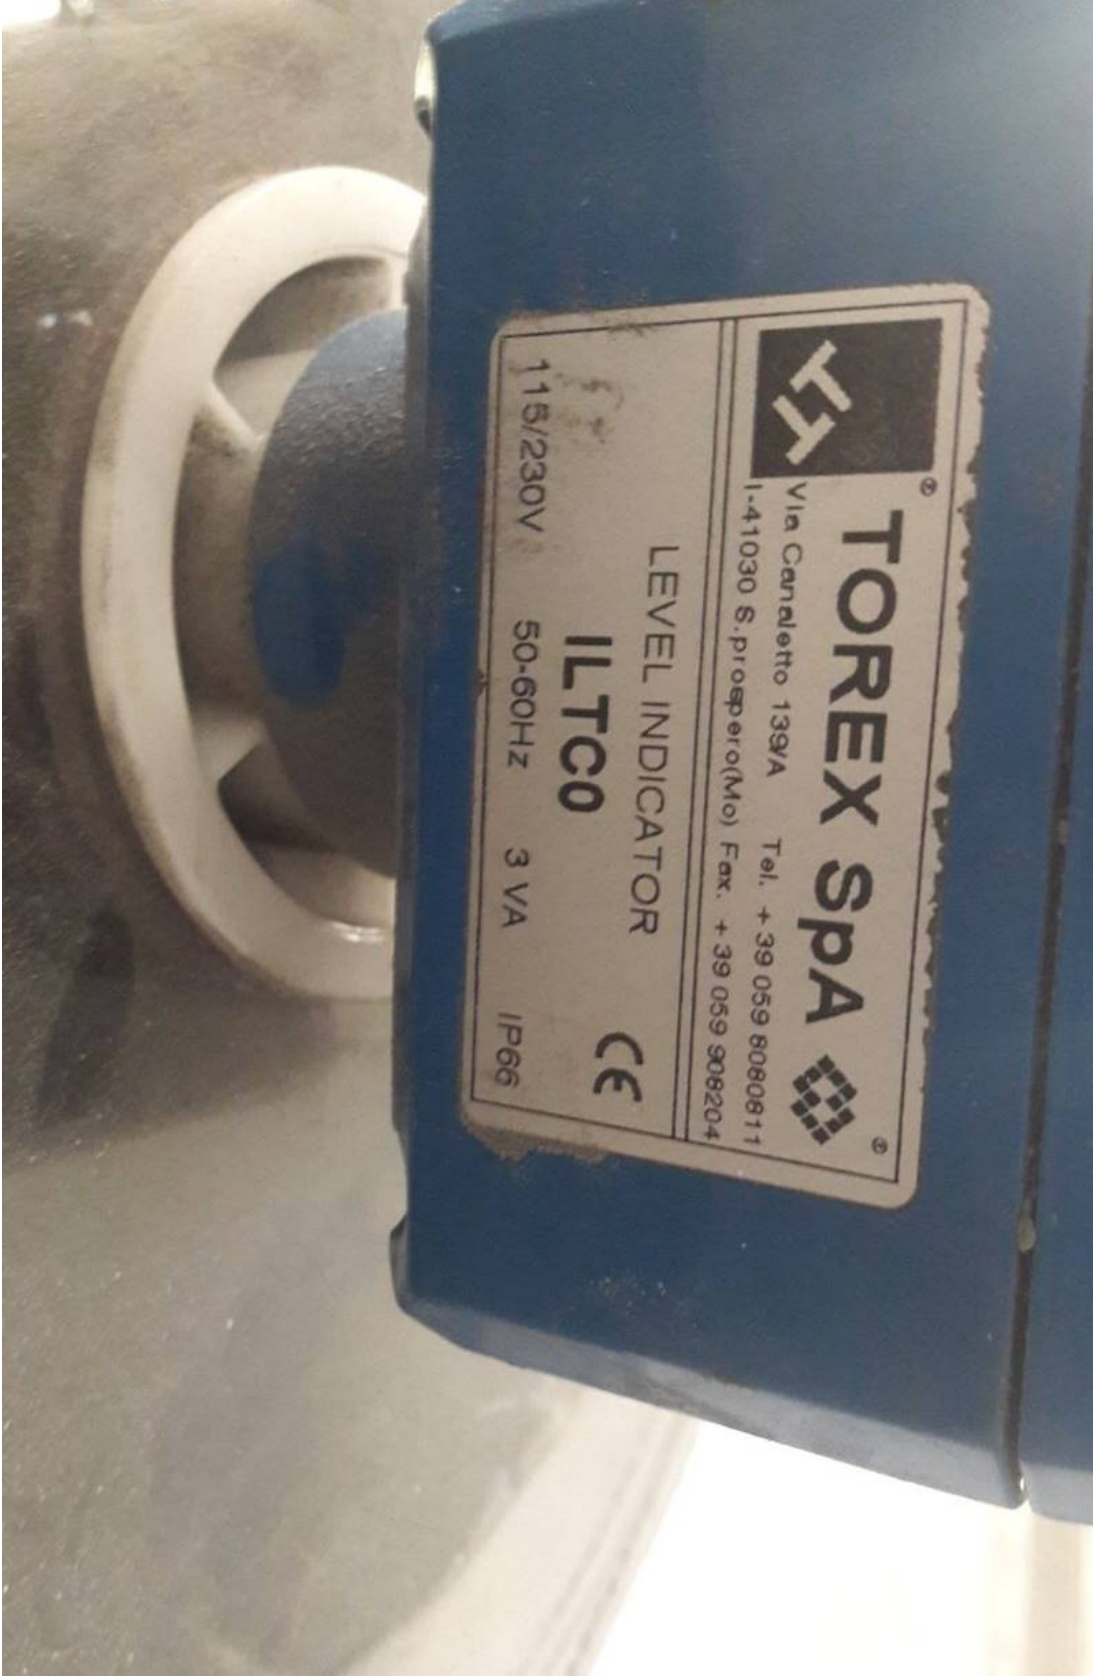

¼r¼n	Açıklama
IltD0	Level indicator as a 24 V / DC rotary wing indicator Connection thread G 1-1 / 2 and G 2-1 / 2; IP65, EN60529 Aluminum housing, detector shaft and paddle made of stainless steel
ILTC0X	Level indicator as rotary paddle switch, ATEX II 1/2D Dust Ex 230 V / 50 Hz, connection thread G 1-1/2; IP65, EN60529 Aluminum housing, detector shaft and paddle made of stainless steel
ILTC0	Level indicator as rotary paddle switch 115/230 V / 50-60 Hz Connection thread G 1-1/2 and G 2-1/2; IP65, EN60529 Aluminum housing, detector shaft and paddle made of stainless steel
ILVA01DA31	Level indicator as vibration detector, standard length piezo-electric oscillating probe with 125 Hz connection 19-50 V/DC output PNP sensitivity adjustable in 2 levels die-cast housing, coated in RAL 5010 screw-in thread R1-1/2 and oscillator made of stainless steel 1.4306 protection class IP66 SLOC
VIA RODOLFO FERRARI 8-10 LEVEL INDICATOR	
VIA CANALETTO 139/A LEVEL INDICATOR	
Rotating Level Probe	
Rv0200080	
IltA0-S	
(NmBC03729032016) IltD0	
V5vv80	
Spi Iltop 24v, 3w	
IltA01ea31	
Rv023010000	
To.900	
Vab080000001	
8202mo1730	Manual adjustment gear for the RV02V cellular wheel sluice
IltA0	
Iltco Bx	
Asi-T2-2a-840 For 2g-2h	
Rv02/30	
Ilt	

Level İndicat¼r 115/230v 50-60hz	
Iltdoax	
576a2200000	
Asi-T2-2a-1380	
Iltc0 Level Indicator	
Iltc0	Level İndikator ILTC0 115 / 230 V 50 - 60 Hz 3 VA IP 66
Iltc0 110/230 V / 50-60 Hz G 1-1/2 Sowie G 2-1/2 En60529	
7202st0100	Angular gear to the RV2 and RV5 rotary valve i = 1:49, 20/30 min-1, to motor flange B14 RMI401800 housing type 85, flange type F2-
Mv0710b04145	Electric motor 0.37 kW / 4-polyg 230/400 V - 50 Hz / IP54 / ISO F / B5
Rv053010000	
4538020100	
S/N 0200317314 K010ilt0ax	
Q204x280-8	
15-11-13-10	
Rv02/Vm	Cell wheel lock type RV02 Drive 0.37 kW / 4-22 min-1 with manual control gear Flow rate 0.42-2.3 cbm / h at 80% filling level Hole pattern above: standard Hole pattern below: standard Rotor volume 2 liters, divided into 8 pockets Housing and rotor made of gray cast iron, primed Inlet and outlet cross section 150x150 mm Rotor diameter 180 mm Weight 63 kg * TOREX version *
Rv0200020	
Iltc0 Level Indicator 110/220 V 50 Hz	
Ipm4001	
7202st0300	
Iltc2	
Iltr0	
Torex Spa 200	
Iltc0a1d1e	
Iltc0s230 4538020100	
Mic 23	
Asi-T2-2a-1650	
115/230 V/Ac	