


Wöhner

Garanti: 12 ay
Bu ür¼ne ait Türkiye içi kapı teslim fiyat ve teslim süresi içeren teklifimizi almak için info@yursat.com.tr e-posta adresine başvuru yapabilir ya da ayrıntılı bilgi için +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaşabilirsiniz. **Wöhner** Markası, tedarik süresi için lütfen bizimle iletişime geçiniz.

Firmamız Wöhner Türkiye Distribütörü veya temsilcisi değildir. Firmamız sipariş durumunda, belirtilen ürünlerde sadece Orjinal ve yeni ürün teklifi sunmaktadır. Bu sitede gösterilen Özel marka adları ve ticari markalar ilgili sahiplerinin m¼lkiyetindedir, talep durumunda kaldırılmaktadır.

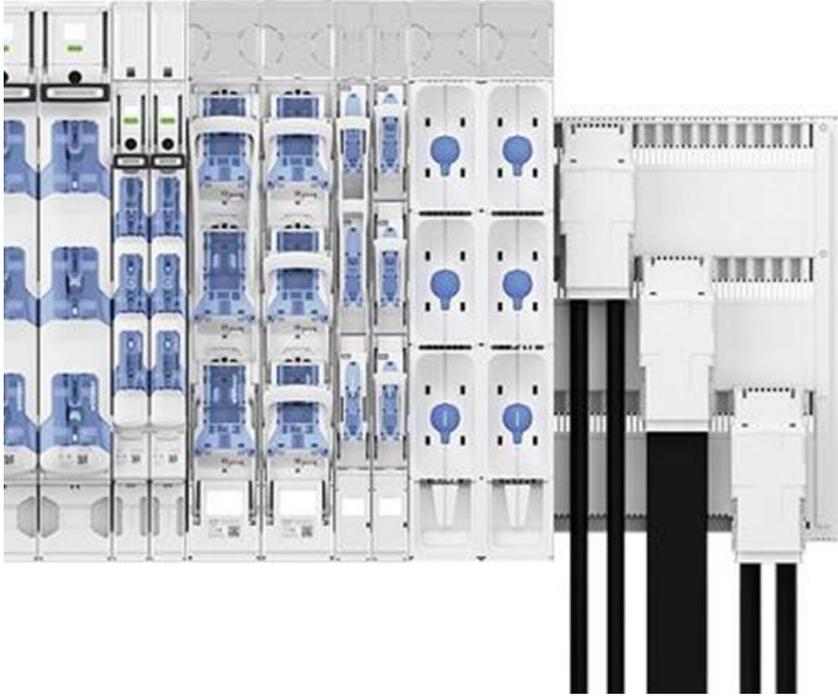

Ürün	Açıklama
Vde 0636	
31940	Holder for cylindrical fuses, with signaling switch 14 x 51 / 1P -- 50 A / 690 V
31277	Holder for cylindrical fuses, for semiconductor protection 10 x 38 / 3P - 32 A / 690 V, for semiconductor protection
31276	Holder for cylindrical fuses, for semiconductor protection 10 x 38 / 2P - 32 A / 690 V, for semiconductor protection
32431	adapter 25A 45mm
31158	D0 busbar switch disconnectors with fuses for D01 and D02 fuses E18 / 63 A / 3P
31901	
01240	50 mm ² , 3-polig,
01245	Busbar cover for busbars 12 - 30 x 10
01573	
01495	BASBAR SUPPORT
01026	Holder for cover profile 32 mm deep, for 01 025 9 x 196 x 32; Dimensions [mm]: 9x32x196 (WxDxH); PU is: 10;

01234	End cover for rail supports 01231 and 01232; Dimensions [mm]: 6x120x200 (WxDxH); PU is: 4;
01243	Terminal plate, 3-pole 35 - 120 mm ² , AWG 2 - 250 MCM, lam. Cu. 9-15.5 x 2.4-10; Dimensions [mm]: 81x84x200 (WxDxH); PU is: 1;
01757	Abdeckkappe, 3-polig 270 mm breit 270 x 200 x 90; MaÙe [mm]:270x90x200 (BxTxH); VPE
01025	Abdeckprofil 700 x 195 ; MaÙe [mm]:700x200x63 (LxBxD); VPE ist:2
01231	Sammelschienentr¼ger 3-polig, mit innenliegenden Anschraubkl¼chern f¼r Doppel-TProfil; MaÙe [mm]:25x123x200 (BxTxH);
01563	Anschlussmodul 16 mm ² , 3-polig mit integrierten Federzugklemmen 1,5 - 16 mm ² , AWG 14 - 6 ; MaÙe [mm]:20x91x200 (BxTxH); VPE ist:8
01240	Anschlussklemmenplatte, 3-polig 6 - 50 mm ² , AWG 10 - 2/0, lam. Cu. 7 - 9 x 4 - 10 ; MaÙe [mm] :54x84x200 (BxTxH); VPE ist:1
01539	Abdeckkappe, 3-polig 180 mm breit 180 x 200 x 90; MaÙe [mm]:180x90x200 (BxTxH); VPE ist:1
01070	Spreizklemme 600 - 1200 mm ² Klemmraum 68 x 28; MaÙe [mm]:85x85x50 (BxTxH); VPE ist:3
01537	Anschlussset, 3-polig, ohne Abdeckung 95 - 300 mm ² , AWG 3/0 - 600 MCM ; MaÙe [mm] :153x115x184 (BxTxH); VPE ist:1;
32214	Sammelschienenadapter 200 A Anschlussklemmen 70 mm ² (oben) 108 x 222; MaÙe [mm]:108x39x222 (BxTxH); VPE ist:1
63A 5683 21-0137	
32430 25 A	Busbar adapter 25 A 1 sliding Support rail 45 x 200, with cables AWG 12 (4 mm ²); Dimensions [mm]: 45x63x200 (WxDxH); PU is: 4; detailed product data under: please refer also W¼hner Manual 2020 page: 3.11
32441 32 A	Busbar adapter 32 A 1 sliding Support rail 54 x 200, with cables AWG 10 (6 mm ²); Dimensions [mm]: 54x63x200 (WxDxH);
32456 63 A	Busbar adapter 63 A 1 sliding Support rail 63 x 200 with cables AWG 8 (10 mm ²); Dimensions [mm]: 63x63x200 (WxDxH);
01613	FLEXIBLE BAR 10x32x1 - 894A - 2 M LENGTH
32570	160 A BUS ADAPTER ALIGNED TO THE SWITCH
01625	COPPER BAR 30x10 - 2.40 m LENGTH
01495	
01243	Connection terminal board, 3-pole 35 - 120 mm ² , AWG 2 - 250MCM, lam. Cu. 9 - 15.5x2.4 - 10 ; Dimensions [mm]: 81x84x200 (WxDxH); PU is:1;detailed product data at: www.woehner.com/de/products/01243.html ; please refer also W¼hner Manual 2020 page: 3.5
01240	Terminal board, 3-pin 6 - 50 mm ² , AWG 10 - 2/0, lam. Cu. 7-9 x 4-10 ; Dimensions [mm] :54x84x200 (WxDxH); Packing unit is:1;detailed Product data at: www.woehner.com/de/products/01240.html ; please refer also W¼hner Manual 2020 page: 3.5
32430	Busbar adapter 25 A, 1 sliding Mounting rail, 45 x 200, with AWG 12 (4) wires mm ² , PU = 4, Cu: 0.042 kg, Ms: 0 kg, Ag: 0 g, Weight: 32.5 kg per 100 pieces, PG05 PUG21
31158	D0 busbar switch-disconnectors with fuses for D01 and D02 fuses E18 / 63 A / 3P; Dimensions [mm]:27x104x220 (WxDxH); Packing unit is:1;detailed Product data at: please refer also W¼hner Manual 2020

	page: 3.18
05784	Insulator internal thread on both sides, width across flats 40 M10x40; Dimensions [mm]:40x40x40 (WxDxH); PU is:20;detailed product data at: www.woehner.com/de/products/05784.html ; please refer also Whner Manual 2020 page: 7,17
01069	Expanding clamp 500 - 1000 mm ² clamping space 55 x 28; Dimensions [mm]:72x85x50 (WxDxH); PU is:3;detailed product data at: www.woehner.com/de/products/01069.html ; please refer also Whner Manual 2020 page: 3.6, 3.7, 3.8, 5.2, 5.3
01537	Connection set, 3-pin, without cover 95 - 300 mm ² , AWG 3/0 - 600 MCM ; Dimensions [mm] :153x115x184 (WxDxH); Packing unit is:1;detailed Product data at: www.woehner.com/de/products/01537.html ; please refer also Whner Manual 2020 page: 3.5
01539	Cover cap, 3-pole 180 mm wide 180 x 200 x 90; Dimensions [mm]: 180x90x200 (WxDxH); PU is:1;detailed product data at: www.woehner.com/de/products/01539.html ; please refer also Whner Manual 2020 page: 3.6
31355	Fuse link 15 A, time delay (slow) 600 V AC, 300VDC Class J, 21x57; Dimensions [mm] :21x21x57 (WxDxH); PU is:10;detailed Product data at: www.woehner.com/de/products/31355.html ; please refer also Whner Manual 2020 page: 7.15
33422	Class J bus mount fuse holder, top connection or below for Class J fuses 35 - 60 A (27x60) 3P, with box clamp; Dimensions [mm] :106x135x200 (WxDxH); Packing unit is:1;detailed Product data at: www.woehner.com/de/products/33422.html ; please refer also residents
01573	End cover for rail support 01484, 01495, 01500, 01508 and 01603 ; Dimensions [mm]: 5x31x166 (WxDxH); PU is:10;detailed product data at: www.woehner.com/de/products/01573.html ; see also Whner Manual 2020 page: 3.2, 3.30
01413	cover cap, 3-pole 84 mm wide 84 x 200 x 55; Dimensions [mm]: 84x55x200 (WxDxH); PU is:10;detailed product data at: www.woehner.com/de/products/01413.html ; please refer also Whner Manual 2020 page: 3.6
01495	Universal busbar support, 3-pole, with internal screw holes; Dimensions [mm] :20x50x191 (WxDxH); PU is:10;detailed Product data at: www.woehner.com/de/products/01495.html ; please refer also Whner Manual 2020 page: 3.1
01563	Connection module 16 mm ² , 3-pole with integrated spring terminals 1.5 - 16 mm ² , AWG 14 - 6 ; Dimensions [mm]: 20x91x200 (WxDxH); PU is:8;detailed product data at: www.woehner.com/de/products/01563.html ; please refer also Whner Manual 2020 page: 3.5
32443	Busbar adapter 32 A 1 sliding Mounting rail 63 x 200, with cables AWG 10 (6th mm ²); Dimensions [mm]: 63x63x200 (WxDxH); PU is:4;detailed product data at: www.woehner.com/de/products/32443.html ; please refer also Whner Manual 2020 page: 3.11
32461	Busbar adapter 63 A 2 sliding Mounting rails 54 x 260 with cables AWG 8 (10 mm ²); Dimensions [mm]: 54x63x260 (WxDxH); PU is:4;detailed product data at: www.woehner.com/de/products/32461.html ; please refer also Whner Manual 2020 page: 3.11
32442	Busbar adapter 32 A 2 sliding Mounting rails 54 x 200, with cables AWG 10 (6th mm ²); Dimensions [mm]: 54x63x200 (WxDxH); PU is:4;detailed product data at: www.woehner.com/de/products/32442.html ; please refer also Whner Manual 2020 page: 3.11
	Busbar adapter 25 A 1 sliding Mounting rail 45 x 200, with cables AWG 12 (4th mm ²); Dimensions [mm]:45x63x200 (WxDxH); PU is:4;detailed

32430	product data at: www.woehner.com/de/products/32430.html ; please refer also W¼hner Manual 2020 page: 3.11
32446	
32486	
31575	
31914	
33503	
33913	
01623	
33911	
03758	NH fuse base 160 A, construction on both sides Screw M8 size 00 / 1P, with touch protection; Dimensions [mm]:36x88x147 (WxDxH); PU is:12
"40x40xM6"	
05783	Insulator internal thread on both sides, width across flats 40 M8x40; Dimensions [mm]:40x40x40 (WxDxH); PU is:20;
01485	Universal busbar support, 4-pole, with internal screw holes; Dimensions [mm] :20x51x245 (WxDxH); PU is:10
33420	NH fuse switch disconnecter Gr, 00, 160 A, Rider, connection below / above screw M8 with electromechanical fuse monitoring and CrossLink® Technology; Dimensions [mm]: 106x172x200 (WxDxH); PU is:1
32436	Busbar adapter 25 A 2 sliding Mounting rails 45 x 200, with screw terminals 6 mm² from behind ; Dimensions [mm]:45x63x200 (WxDxH); PU is:4
01243	Connection terminal board, 3-pole 35 - 120 mm², AWG 2 - 250 MCM, lam, Cu, 9 - 15.5 x 2.4 - 10 ; Dimensions [mm]: 81x84x200 (WxDxH); PU is:1
04195	Universal busbar support, 3-pole, with internal screw holes; Dimensions [mm] :20x50x191 (WxDxH); PU is:10
5683 21-0137 79316 63A	
32 442	
05784	Insulator internal thread on both sides, width across flats 40 M10x40; Dimensions [mm]:40x40x40 (WxDxH); PU is:20;
32140	Busbar adapter 250 A, 3-pole, adapted on switching devices for Eaton NZM2-XKR40 and NZM2-XKR4U 105 x 190, connection to the system up down; Dimensions [mm]: 105x35x190 (WxDxH);
01025	cover profile 700 x 195; Dimensions [mm]:700x200x63 (LxWxD); PU is:2;detailed product data
1204	busbar 30 x 10 length 3.60 m, tinned ; Dimensions [mm]: 3600x30x10 (LxWxD); PU is:1
01495	Universal busbar support, 3-pole, with internal screw holes, VE = 10, Cu: 0 kg, Ms: 0 kg, Ag: 0 g, Weight: 12.7 kg per 100 pieces, PG06 PUG09
32157	Busbar adapter 570 A, 3-pole, adapted on switching devices for Schneider Electric NS400/630, NSX 400/630 140x270, connection to the system up down; Dimensions [mm]: 140x35x272 (WxDxH); PU is:1
	Busbar adapter 63 A 2 sliding Mounting rails 54 x 200 with cables AWG

32455	8 (10 mm ²); Dimensions [mm]: 54x63x200 (WxDxH); PU is:4;
32454	Busbar adapter 63 A 1 sliding Mounting rail 54 x 200, with cables AWG 8 (10 mm ²); Dimensions [mm]: 54x63x200 (WxDxH); PU is:4;
32431	Busbar adapter 25 A 2 sliding Mounting rails 45 x 200, with cables AWG 12 (4th mm ²); Dimensions [mm]:45x63x200 (WxDxH); PU is:4;
32430	Busbar adapter 25 A 1 sliding Mounting rail 45 x 200, with cables AWG 12 (4th mm ²); Dimensions [mm]:45x63x200 (WxDxH); PU is:4;
01025	cover profile 700 x 195; Dimensions [mm]:700x200x63 (LxWxD); PU is:2;
01026	Holder for cover profile 32 mm deep, for 01025 9 x 196x32; Dimensions [mm]:9x32x196 (WxDxH); PU is:10;
01573	End cover for rail support 01484, 01495, 01500, 01508 and 01603 ; Dimensions [mm]: 5x31x166 (WxDxH); PU is:10;
01240	Terminal board, 3-pin 6 - 50 mm ² , AWG 10 - 2/0, lam, Cu, 7 - 9 x 4 - 10 ; Dimensions [mm] :54x84x200 (WxDxH); Packing unit is:1;detailed
01619	busbar 15 x 5 length 2.40 m, tinned ; Dimensions [mm]: 2400x15x5 (LxWxD); PU is:1;
01495	Universal busbar support, 3-pole, with internal screw holes; Dimensions [mm] :20x50x191 (WxDxH); PU is:10;detailed Product data at: www.woehner.com/de/products/01495.html ; please refer also W¼hner Manual 2020 page: 3.1
32442	Busbar adapter 32 A 2 sliding Mounting rails 54 x 200, with cables AWG 10 (6th mm ²); Dimensions [mm]: 54x63x200 (WxDxH); PU is:4;detailed product data at: www.woehner.com/de/products/32442.html ; please refer also W¼hner Manual 2020 page: 3.11
01243	Connection terminal board, 3-pole 35 - 120 mm ² , AWG 2 - 250 MCM, lam, Cu, 9 - 15.5 x 2.4 - 10 ; Dimensions [mm]: 81x84x200 (WxDxH); PU is:1;detailed product data at: www.woehner.com/de/products/01243.html ; please refer also W¼hner Manual 2020 page: 3.5
160 A	
100 A	
80 A	
32708	Busbar adapter 1000 A for Siemens 3VA25 (630 A, 800 A, 1000 A) 300 x 652, Connection below, clamp contact; Dimensions [mm]:300x113x652 (WxDxH); PU is:1; novelty
03558	NH fuse link 160 A 500 V, gG size 1; PU is:3
03571	NH-Sicherungseinsatz 250 A 500 V, gG Gr¼Ùe 2; VPE ist:3
33198	NH fuse switch disconnecter Gr, 00, 160 A, Rider, connection below / above box terminal with CrossLink®Technology; Dimensions [mm] :106x97x200 (WxDxH); Packing unit is:1;detailed
33203	NH fuse switch disconnecter size 3, 630 A, construction screw M12 ; Dimensions [mm]:256x143x300 (WxDxH); PU is:1;
32454	Busbar adapter 63 A 1 sliding Mounting rail 54 x 200, with cables AWG 8 (10 mm ²); Dimensions [mm]: 54x63x200 (WxDxH); PU is:4;
05784	Insulator internal thread on both sides, width across flats 40 M10x40; Dimensions [mm]:40x40x40 (WxDxH); PU is:20;detailed product data
33198 100A	

Connection terminal plate, 3-pole 35 - 120 mm²,	01243 AWG 2 - 250 MCM, lam, Cu, 9 - 15.5 x 2.4 - 10 ; Dimensions [mm]:81x84x200 (WxDxH); PU
32430	Busbar adapter 25 A 1 movable DIN rail 45 x 200, with cables AWG 12 (4 mm ²); Dimensions [mm]:45x63x200 (WxDxH);
01495	Universal busbar support, 3-pole, with internal screw holes; Dimensions [mm] :20x50x191 (WxDxH);
01573	End cover for rail support 01484, 01495, 01500, 01508 and 01603; Dimensions [mm]:5x31x166 (WxDxH);
01244	Busbar cover for rail 12 - 30 x 5, length 1 m contact protection; Dimensions [mm] :1000x40x9 (LxWxD)
32442	Busbar adapter 32 A 2 movable Mounting rails 54 x 200, with cables AWG 10 (6 mm ²); Dimensions [mm]:54x63x200 (WxDxH)
WHN32442	
05784	Insulator internal thread on both sides, wrench size 40M10x40; Dimensions [mm]:40x40x40 (WxDxH); package is 20 pieces;
05784	Insulator internal thread on both sides, wrench size 40M10x40; Dimensions [mm]:40x40x40 (WxDxH); PU is:20; detailed product data at: www.woehner.com/de/products/05784.html ; please refer also W¼hner Manual 2020 page: 7.17
Hybrid switch, 3-pole or 1-pole switchable 25 A (I	for ohmic loads, with CrossLink® interface; Dimensions [mm]:36x144x200 (WxDxH); PU
33142	Cover for cable lugs, top/bottom Can be plugged into QCB-NH1, QCS-NH1, QCS-320 QCB-NH1, QCS-NH1, QCS-320; Dimensions [mm] :183x68x65 (WxDxH); Packaging unit is:2;detailed
33143	Cover for cable lugs, top/bottom connectable for QCB-NH2 ; Dimensions [mm]:209x52x79 (WxDxH); Packaging unit is: 2; detailed product data
33198	NH fuse switch disconnecter size 00, 160 A, Rider, bottom/top connection box terminal with CrossLink®Technology; Dimensions [mm] :106x97x200 (WxDxH);
33601	NH fuse switch disconnecter size 1, 250 A, Rider, bottom/top connection with M10 screw CrossLink® Technology; Dimensions [mm]:184x129x243 (WxDxH);
Fuse	NH fuse switch-disconnector size 2, 400 A screw M10 33602
33602	NH fuse switch disconnecter size 2, 400 A, Rider, bottom/top connection screw M10 ; Dimensions [mm]:210x145x288 (WxDxH)
33198	NH fuse switch disconnecter size 00, 160 A, rider, connection bottom / top box terminal with CrossLink®Technology; dimensions [mm] : 106x97x200 (WxDxH)
33603	NH fuse switch disconnecter size 3, 630 A, slider, connection bottom / top screw M12; Dimensions [mm]: 256x160x300 (WxDxH); PU is: 1; detailed product data
32466	Busbar adapter 80 A 1 movable support rail 54 x 200, without cables, with screw terminals 16 mm ² from the rear; dimensions [mm] : 54x63x200 (WxDxH)
23325010	
01500	Universal busbar support 3-pole, with additional screw holes on the outside; dimensions [mm]: 20x50x215 (WxDxH); PU is: 10
22-0735 01026 PG-GF 10-FR	

22-0530	
BUSBAR CONNECTION DEVICE 32431	
LTS-00	
33398	NH fuse switch disconnecter size 00, 160 A, Rider, connection bottom / top, screw M8, with CrossLink®Technology, PU = 1, Cu: 0.203 kg, Ms: 0 kg, Ag: 0.69 g,
01318	Expansion clamp, Cu / Al 95 - 185 mm ² , PU = 6, Cu: 0 kg, Ms: 0.128 kg, Ag: 0 g, Weight: 31.2 kg per 100 pieces, PG07 PUG20
WÖ-MS surcharge	MS surcharge for an MS63/37 listing from 872.00 EUR/100kg
Sammelschienenrger 3-polig, 185 mm	
WHN-01495	Bar support insulator
WHN-01243	Busbar Feeding Box
WHN-32430	Bar Output Module
01677	D-type fuse link 35 A, 500 V, black, E 33, VE = 5, Cu: 0 kg, Ms: 0 kg, Ag: 0 g, Weight: 4.8 kg per 100 pieces, PG22 PUG02
31175	D-type fuse base, E 33 / 63 A / 1P, for Screw-in fittings, touch-proof according to DGUV V3, VE = 9, Cu: 0.014 kg, Ms: 0.022 kg, Ag: 0.065 g, weight: 18.6 kg per 100 pieces, PG02 PUG12
01100	D screw cap, porcelain, 500 V, E 33, PU = 20, Cu: 0 kg, Ms: 0 kg, Ag: 0 g, Weight: 7.9 kg per 100 pieces, PG22 PUG05
33770	NH fuse switch disconnecter 160 A, Frame clamp 70 mm ² , high version, size 00, 3- Pole-switchable, VE = 1, Cu: 0.611 kg, Ms: 0 kg, Ag: 1.772 g, weight: 261.8 kg per 100 pieces, PG12 PUG52
33198	NH fuse switch-disconnector size. 00,160A SO Terminal frame terminal, exhaust. down up
01 536	
31118 - 14x51 3p / FiŐek Sig.AltliĐi	
01563	Connection module 16 mm ² , 3-pos with spring clips SO 1,5 - 16 mm ²
Art Nr. 05794	Isolator inside thread on both sides, width across flats 36 M6x50
33079	NH fuse switch-disconnector Connection screw M8 suitable for 5-pole system
01 240 300 A	
32454	Adapter EEC 63 A, 1 sliding Tragsc SO 1 sliding mounting rail
01098	
01284	
01619	
01540	
01303	
01 287	
32156 Busbar Adapter	
01025	cover profile SO 700x195

Vde 0432 05784	Isolator
01 203	
32430	Adapter EEC 25 A, 1 sliding Tragsc SO 1 sliding mounting rail
33602	NH fuse switch-disconnector size. 2, 400
01590	
01234	
32457	Adapter EEC 63 A, 1 sliding Tragsc SO 1 sliding mounting rail copper PU = 4 pieces The quantity was adjusted to VPE. Delivery only in PU.
01224	
01 625	
1601	
01287	
01356	
33601	NH fuse switch-disconnector size. 1, 250 Screw M10 with Crosslik Technology
01515	
01243	